



Downlights Fixed

Pages 127-168

05



The 3-12W Round Recessed Panels Aluminium




10103FA/W/W

10103FA | 3W | SMD | Aluminium



IP40

super slim.




10108FA/W/C

10108FA | 8W | SMD | Aluminium



IP40

super slim.



Optional dimmable driver code 89009UT.




10112FA/B/W

10112FA | 12W | SMD | Aluminium



IP40

super slim.



Optional dimmable driver code 89016UT.

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10103FA/W/W	White	Warm white	3000K	3W	180lm	120°	230V		70mm	50mm	60	Complete with 300mA driver
10108FA/W/C	White	Cool white	4000K	8W	560lm	120°	230V		108mm	50mm	40	Complete with 300mA driver
10108FA/B/C	Black	Cool white	4000K	8W	560lm	120°	230V		108mm	50mm	40	Complete with 300mA driver
10112FA/B/C	Black	Cool white	4000K	12W	840lm	120°	230V		155mm	50mm	30	Complete with 250mA driver
10112FA/B/W	Black	Warm white	3000K	12W	720lm	120°	230V		155mm	50mm	30	Complete with 250mA driver

The 18-30W Round Recessed Panels

Aluminium



10112FA/B/W



10130FA/W/C



10118FA/W/W

10118FA | 18W | SMD | Aluminium


Optional dimmable driver code 89024UT.



IP40



10118FA/B/W



10130FA/W/C

10130FA | 30W | SMD | Aluminium


Optional dimmable driver code 89030UT.



IP40



10130FA/W/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10118FA/W/W	White	Warm white	3000K	18W	1080lm	120°	230V		210mm	50mm	20	Complete with 450mA driver
10118FA/B/W	Black	Warm white	3000K	18W	1080lm	120°	230V		210mm	50mm	20	Complete with 450mA driver
10130FA/W/C	White	Cool white	4000K	30W	2100lm	120°	230V		285mm	50mm	15	Complete with 700mA driver
10130FA/W/W	White	Warm white	3000K	30W	1800lm	120°	230V		285mm	50mm	15	Complete with 700mA driver

The 3-12W Round Recessed Panels

CCT V



10103FA | 3W | SMD | Aluminium



10103FA/W/V


IP20



10103FA/B/V



CCT Variable



10108FA/W/V


IP20



10108FA/B/V



CCT Variable



10112FA/W/V


IP20



10112FA/B/V



CCT Variable



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	U	↓↑	📦	Notes
10103FA/W/V	White	CCT V	3000K-4000K-5700K	3W	240lm	120°	230V		70mm	50mm	30	Complete with 300mA driver
10103FA/B/V	Black	CCT V	3000K-4000K-5700K	3W	240lm	120°	230V		70mm	50mm	30	Complete with 300mA driver
10108FA/W/V	White	CCT V	3000K-4000K-5700K	8W	640lm	120°	230V		108mm	50mm	20	Complete with 200mA driver
10108FA/B/V	Black	CCT V	3000K-4000K-5700K	8W	640lm	120°	230V		108mm	50mm	20	Complete with 200mA driver
10112FA/W/V	White	CCT V	3000K-4000K-5700K	12W	1200lm	120°	230V		155mm	50mm	20	Complete with 300mA driver
10112FA/B/V	Black	CCT V	3000K-4000K-5700K	12W	1200lm	120°	230V		155mm	50mm	20	Complete with 300mA driver

The 18W-30W Round Recessed Panels

CCT V



10118FA/W/V



10118FA/B/V



10118FA/W/V

10118FA | 18W | SMD | Aluminium




IP20



10118FA/B/V



CCT Variable



10130FA/W/V

10130FA | 30W | SMD | Aluminium




IP20



10130FA/B/V



CCT Variable



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10118FA/W/V	White	CCT V	3000K-4000K-5700K	18W	1800lm	120°	230V		210mm	50mm	16	Complete with 450mA driver
10118FA/B/V	Black	CCT V	3000K-4000K-5700K	18W	1800lm	120°	230V		210mm	50mm	16	Complete with 450mA driver
10130FA/W/V	White	CCT V	3000K-4000K-5700K	30W	3300lm	120°	230V		285mm	50mm	12	Complete with 800mA driver
10130FA/B/V	Black	CCT V	3000K-4000K-5700K	30W	3300lm	120°	230V		285mm	50mm	12	Complete with 800mA driver

The 40-48W Round Recessed Panels

Aluminium




10140F/W/C

10140F | 40W | SMD | Aluminium



IP40

super slim.




10148PE/W/W

10148PE | 48W | SMD | Aluminium

Driver must be ordered separately.



IP20

Optional non-dimmable driver.
Order code 89048.Optional TRIAC dimmable driver.
Order code 89048T.Optional DALI, Triac & Push to DIM & 1-10V driver.
Order code 89050TLD.

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⌀	↓↑	📦	Notes
10140F/W/C	White	Cool white	4000K	40W	3400lm	120°	230V	□	408mm	40mm	5	Complete with 1000mA driver
10140F/W/W	White	Warm white	3000K	40W	3400lm	120°	230V	□	408mm	40mm	5	Complete with 1000mA driver
10148PE/W/W	White	Warm white	3000K	48W	3500lm	120°	1200mA	⬢	585mm	80mm	4	Requires 1200mA driver



The 16-30W Square Recessed Panels Aluminium

50116FA | 16W | SMD | Aluminium



50116FA/W/V

IP20





50122FA | 22W | SMD | Aluminium



50122FA/W/W

IP40




50122FA | 22W | SMD | Aluminium



50122FA/W/V

IP20




50130FA | 30W | SMD | Aluminium



50130FA/W/V

IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏏	⏏	📦	Notes
50116FA/W/V	White	CCT V	3000K-4000K-5700K	16W	1600lm	120°	230V	□	155x155mm	50mm	20	Complete with 400mA driver
50122FA/W/W	White	Warm white	3000K	22W	1320lm	120°	230V	□	210x210mm	50mm	20	Complete with 500mA driver
50122FA/W/V	White	CCT V	3000K-4000K-5700K	22W	2200lm	120°	230V	□	210x210mm	50mm	16	Complete with 550mA driver
50130FA/W/V	White	CCT V	3000K-4000K-5700K	30W	3000lm	120°	230V	□	280x280mm	50mm	12	Complete with 800mA driver

Panels For Germany/Austria

620x620mm



50140FA | 36W | SMD | 620x620mm | Aluminium

For recessed 620x620mm ceilings.




new
IP20

2
YEAR




Optional DALI & Push
to DIM driver.
Order code 89044L.



50140BAU | 40W | SMD | 620x620mm | Aluminium + Steel | Microprismatic

Backlit.



IP20

3
YEAR




Optional suspension kit.
Order code 050017.



Optional
recessed kit (4pcs).
Order code 050108.



Optional DALI & Push
to DIM driver.
Order code 89040L.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	↑↓	📦	Notes
50140FA/V	-	CCT V	3000K-4000K-5500K	36W	3600lm	230V	□	50mm	4	Complete with 950mA driver
50140BAU/W/V	White	CCT V	3000K-4000K-6000K	40W	3600lm-4000lm-3800lm	230V	□	60mm	4	Complete with 1000mA driver

Panels 600x600mm

50140F | 36W | SMD | 595x595mm | Aluminium

For recessed 600x600mm ceilings.




50140F/V



new
IP20



Optional DALI & Push
to DIM driver.
Order code 89044L.



50140B | 40W | SMD | 595x595mm | Aluminium + Steel

Backlit.



50140B/W/C



IP20




Optional suspension kit.
Order code 050017.



Optional
recessed kit (4pcs).
Order code 050108.



Optional DALI & Push
to DIM driver.
Order code 89044L.



50140BU | 40W | SMD | 595x595mm | Aluminium + steel | Microprismatic

Backlit.



50140BU/W/V



IP20




Optional suspension kit.
Order code 050017.



Optional
recessed kit (4pcs).
Order code 050108.



Optional DALI & Push
to DIM driver.
Order code 89044L.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	↓↑	📦	Notes
50140F/V	-	CCT V	3000K-4000K-5500K	36W	3600lm	230V	☐	50mm	4	Complete with 950mA driver
50140B/W/C	White	Cool white	4000K	40W	4000lm	230V	☐	50mm	4	Complete with 850mA driver
50140BU/W/V	White	CCT V	3000K-4000K-5700K	40W	3600lm-4000lm-3800lm	230V	☐	60mm	4	Complete with 1000mA driver



The Rectangular Panels 1200x300mm



50140BR | 40W | SMD | Aluminium + steel

Backlit.



LED
BUILT IN

IP20



Optional suspension kit.
Order code 050017.




Requires 2 sets.

Optional recessed kit (4pcs).
Order code 050108.



Optional DALI & Push
to DIM driver.
Order code 89040L.



50140BRU | 40W | SMD | Aluminium + steel | Microprismatic

Backlit.



LED
BUILT IN

IP20



Optional suspension kit.
Order code 050017.




Requires 2 sets.

Optional recessed kit (4pcs).
Order code 050108.



Optional DALI & Push
to DIM driver.
Order code 89040L.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	↑↓	📦	Notes
50140BR/W/C	White	Cool white	4000K	40W	4000lm	230V	□	50mm	4	Complete with 1000mA driver
50140BRU/W/V	White	CCT V	3000K-4000K-5700K	40W	3600lm-4000lm-3800lm	230V	□	50mm	4	Complete with 1000mA driver



one

The IP65 Recessed Panels 600X600mm



50140BW/W/V

50140BW | 40W | SMD | 595x595mm | Aluminium + Steel


Backlit.



Optional suspension kit.
Order code 050017.



Optional
recessed kit (4pcs).
Order code 050108.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	⏏	📦	Notes
50140BW/W/V	White	CCT V	3000K-4000K-5700K	40W	4000lm	230V	□	60mm	4	Complete with IP65 950mA driver



Surface/Recessed Panels Adjustable Cut Out Hole

62116F | 16W | SMD | Surface / Recessed Mounted | Plastic



62116F/W/W

IP20



Adjustable cutout hole.



62116FA | 16W | SMD | Surface / Recessed Mounted | Plastic



62116FA/W/W

IP20



Adjustable cutout hole.




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
62116F/W/W	White	Warm white	3000K	16W	1500lm	100-240V		70-175mm	50mm	20	Complete with 210mA driver
62116FA/W/C	White	Cool white	4000K	16W	1500lm	100-240V		70-190mm	50mm	20	Complete with 230mA driver
62116FA/W/W	White	Warm white	3000K	16W	1500lm	100-240V		70-190mm	50mm	20	Complete with 230mA driver

LED Downlights




50122D/W/C

50122D | 22W | SMD | Aluminium



50130B/W/C

50130B | 30W | COB | Aluminium + metal



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
50122D/W/C	White	Cool white	4000K	22W	1870lm	100°	230V				20	Complete with 500mA driver
50130B/W/C	White	Cool white	4000K	30W	2700lm	30°	230V				16	Complete with 750mA driver

The Budget Downlight Range

Aluminium



10124T/W/W

10115T/W/V

10107T/W/V



10103T/W/W

10103T | 3W | SMD | Aluminium



IP20



10124T/W/W

10124T | 24W | SMD | Aluminium



IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10103T/W/C	White	Cool white	4000K	3W	220lm	120°	230V		68mm	50mm	100	Complete with 250mA driver
10103T/W/W	White	Warm white	3000K	3W	210lm	120°	230V		68mm	50mm	100	Complete with 250mA driver
10124T/W/W	White	Warm white	3000K	24W	1700lm	120°	230V		210mm	75mm	20	Complete with 600mA driver

The Budget Downlight Range

CCT V

10103T | 3W | SMD | Aluminium




10103T/W/V



10107T | 7W | SMD | Aluminium



10107T/W/V



10115T | 15W | SMD | Aluminium





10115T/W/V



10124T | 24W | SMD | Aluminium



10124T/W/V



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10103T/W/V	White	CCT V	3000K-4000K-5000K	3W	240lm	120°	230V		68mm	50mm	100	Complete with 70mA driver
10107T/W/V	White	CCT V	3000K-4000K-5000K	7W	560lm	120°	230V		85mm	60mm	60	Complete with 200mA driver
10115T/W/V	White	CCT V	3000K-4000K-5000K	15W	1200lm	120°	230V		130mm	60mm	30	Complete with 350mA driver
10124T/W/V	White	CCT V	3000K-4000K-5000K	24W	1920lm	120°	230V		210mm	75mm	20	Complete with 600mA driver

Floating Round Panels Range

Adjustable Cut Out Hole



10120CE/C

10114CE/C

10110CE/C

10110CE | 10W | SMD | Aluminium + PC




10110CE/W



IP20



Adjustable cutout hole.

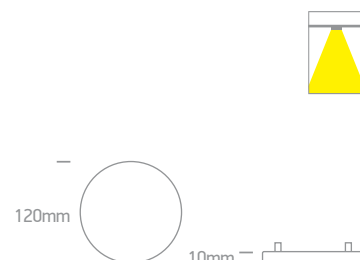

10114CE | 14W | SMD | Aluminium + PC




10114CE/W



IP20



Adjustable cutout hole.

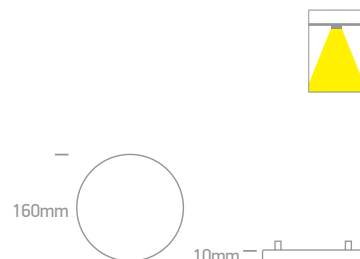

10120CE | 20W | SMD | Aluminium + PC




10120CE/W



IP20



Adjustable cutout hole.

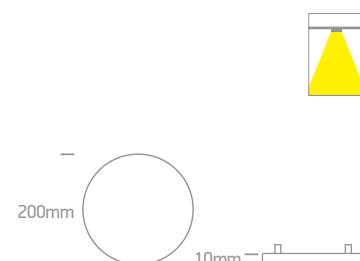

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
10110CE/C	White	Cool white	4000K	10W	1150lm	230V			60-100mm	40mm	40 Complete with 250mA driver
10110CE/W	White	Warm white	3000K	10W	1150lm	230V			60-100mm	40mm	40 Complete with 250mA driver
10114CE/C	White	Cool white	4000K	14W	1610lm	230V			60-140mm	40mm	40 Complete with 300mA driver
10114CE/W	White	Warm white	3000K	14W	1610lm	230V			60-140mm	40mm	40 Complete with 300mA driver
10120CE/C	White	Cool white	4000K	20W	2300lm	230V			70-180mm	40mm	40 Complete with 700mA driver
10120CE/W	White	Warm white	3000K	20W	2300lm	230V			70-180mm	40mm	40 Complete with 700mA driver

Floating Square Panels Range

Adjustable Cut Out Hole




50110CE | 10W | SMD | Aluminium + PC



LED
BUILT IN

IP20

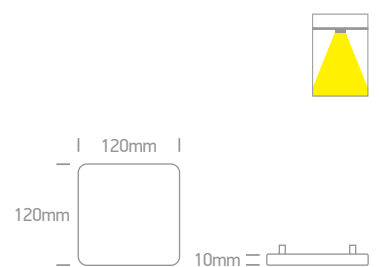


50114CE | 14W | SMD | Aluminium + PC



LED
BUILT IN

IP20

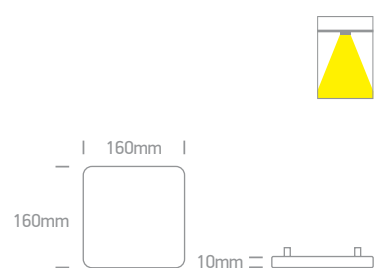


50120CE | 20W | SMD | Aluminium + PC



LED
BUILT IN

IP20

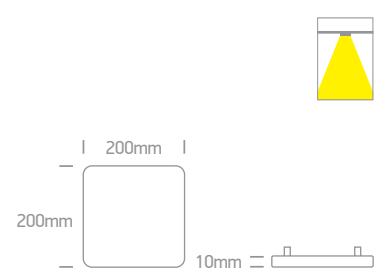

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
50110CE/W	White	Warm white	3000K	10W	1150lm	230V		50-100mm	50mm	40	Complete with 250mA driver
50114CE/C	White	Cool white	4000K	14W	1610lm	230V		70-140mm	50mm	40	Complete with 300mA driver
50114CE/W	White	Warm white	3000K	14W	1610lm	230V		70-140mm	50mm	40	Complete with 300mA driver
50120CE/C	White	Cool white	4000K	20W	2300lm	230V		70-180mm	50mm	40	Complete with 700mA driver
50120CE/W	White	Warm white	3000K	20W	2300lm	230V		70-180mm	50mm	40	Complete with 700mA driver



The COB Downlight Range

Aluminium



10107CA | 7W | COB | Aluminium



IP20



10115CA | 15W | COB | Aluminium



IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10107CA/W/W	White	Warm white	3000K	7W	560lm	60°	230V		75mm	70mm	50	Complete with 300mA driver
10115CA/W/W	White	Warm white	3000K	15W	1275lm	60°	230V		125mm	100mm	30	Complete with 350mA driver

The COB Downlight Range

Aluminium



10120CA | 20W | COB | Aluminium



10120CA/W/C



IP20



10130CA | 30W | COB | Aluminium



10130CA/W/C



IP20



10160CA | 60W | COB | Aluminium



10160CA/W/C



IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10120CA/W/C	White	Cool white	4000K	20W	1800lm	60°	230V		145mm	100mm	20	Complete with 500mA driver
10130CA/W/C	White	Cool white	4000K	30W	2700lm	60°	230V		210mm	140mm	10	Complete with 750mA driver
10130CA/W/W	White	Warm white	3000K	30W	2700lm	60°	230V		210mm	140mm	10	Complete with 750mA driver
10160CA/W/C	White	Cool white	4000K	60W	5400lm	60°	230V		210mm	160mm	10	Complete with 1500mA driver
10160CA/W/W	White	Warm white	3000K	60W	5400lm	60°	230V		210mm	160mm	10	Complete with 1500mA driver



10107CA/W/V

10115CA/W/V

The COB Downlight Range

CCT V




10107CA/W/V


10107CA | 7W | COB | Aluminium



new
IP20




10107CA/B/V




10110CA/W/V


10110CA | 10W | COB | Aluminium



new
IP20



10110CA/B/V




10115CA/W/V


10115CA | 15W | COB | Aluminium



new
IP20



10115CA/B/V



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⌀	Height	Box	Notes
10107CA/W/V	White	CCT V	3000K-4000K-5000K	7W	600lm	60°	230V		75mm	70mm	50	Complete with 160mA driver
10107CA/B/V	Black	CCT V	3000K-4000K-5000K	7W	600lm	60°	230V		75mm	70mm	50	Complete with 160mA driver
10110CA/W/V	White	CCT V	3000K-4000K-5000K	10W	850lm	60°	230V		100mm	100mm	50	Complete with 250mA driver
10110CA/B/V	Black	CCT V	3000K-4000K-5000K	10W	850lm	60°	230V		100mm	100mm	50	Complete with 250mA driver
10115CA/W/V	White	CCT V	3000K-4000K-5000K	15W	1275lm	60°	230V		125mm	100mm	30	Complete with 350mA driver
10115CA/B/V	Black	CCT V	3000K-4000K-5000K	15W	1275lm	60°	230V		125mm	100mm	30	Complete with 350mA driver



The COB Downlight Range

CCT V

10120CA | 20W | COB | Aluminium



10120CA/W/V



new
IP20



10120CA/B/V



10120CB | 20W | COB | Aluminium



10120CB/W/V



new
IP20



10120CB/B/V



10130CA | 30W | COB | Aluminium



10130CA/W/V



new
IP20




10130CA/B/V



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⌀	↑↓	📦	Notes
10120CA/W/V	White	CCT V	3000K-4000K-5000K	20W	1800lm	60°	230V	□	145mm	100mm	20	Complete with 500mA driver
10120CA/B/V	Black	CCT V	3000K-4000K-5000K	20W	1800lm	60°	230V	□	145mm	100mm	20	Complete with 500mA driver
10120CB/W/V	White	CCT V	3000K-4000K-5000K	20W	1800lm	60°	230V	□	180mm	110mm	20	Complete with 500mA driver
10120CB/B/V	Black	CCT V	3000K-4000K-5000K	20W	1800lm	60°	230V	□	180mm	110mm	20	Complete with 500mA driver
10130CA/W/V	White	CCT V	3000K-4000K-5000K	30W	2700lm	60°	230V	□	210mm	170mm	10	Complete with 750mA driver
10130CA/B/V	Black	CCT V	3000K-4000K-5000K	30W	2700lm	60°	230V	□	210mm	170mm	10	Complete with 750mA driver

The Dark Light Downlights

CCT V

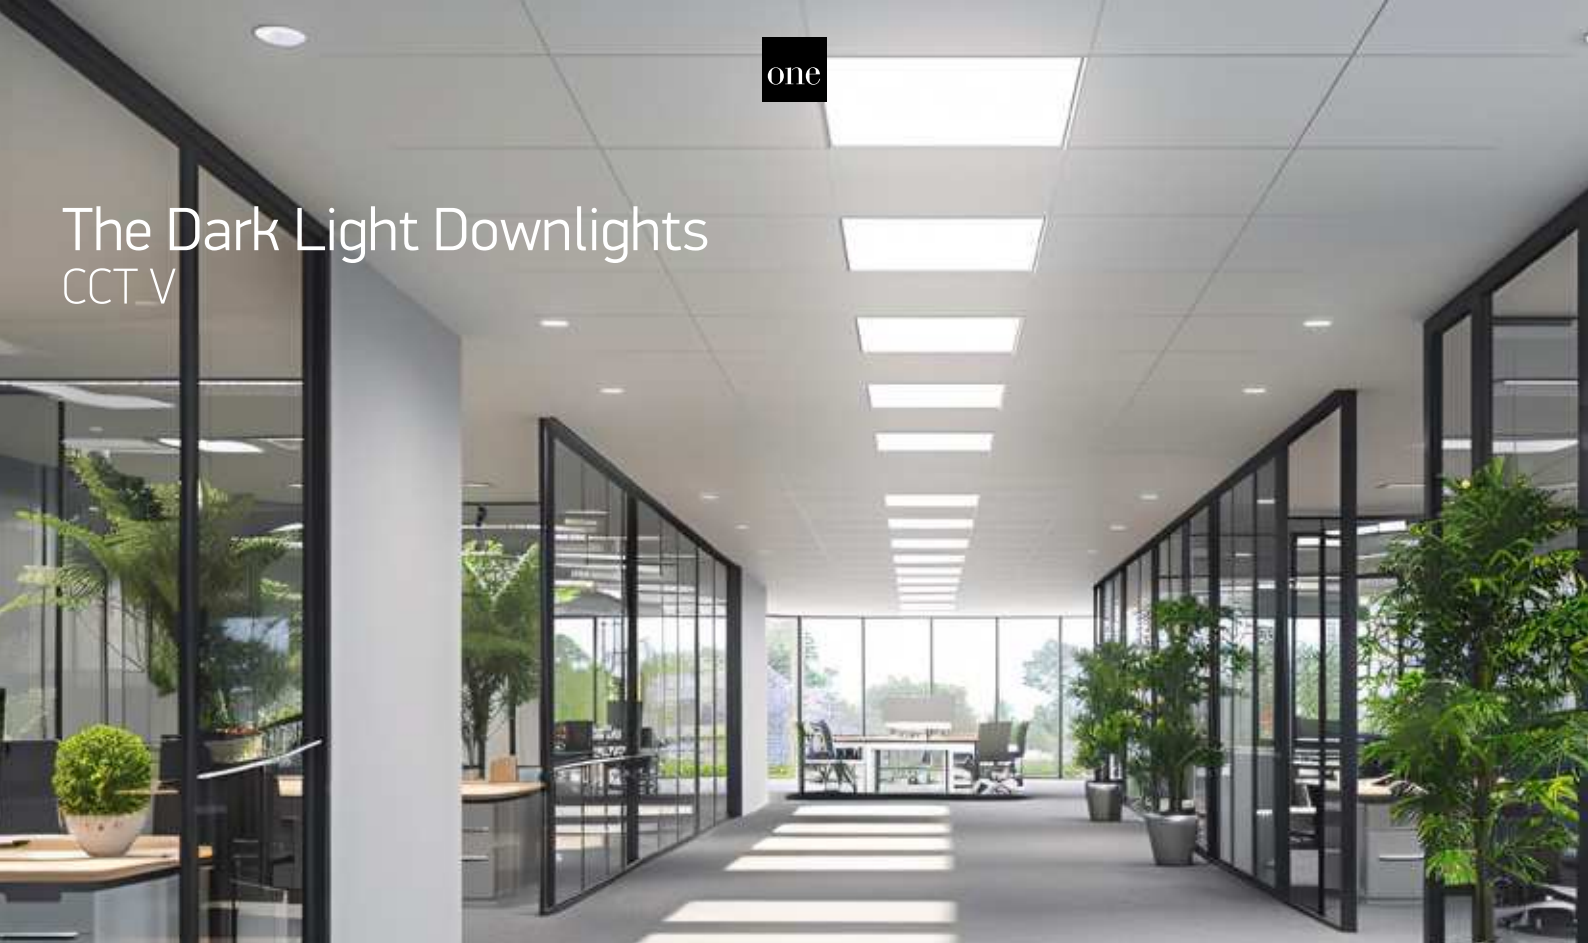

10108ED | 8W | SMD | Aluminium



10107ED | 7W | SMD | Aluminium



10112ED | 12W | SMD | Aluminium



Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10108ED/W/B/W	White	Black	Warm white	3000K	8W	480lm	60°	230V		75mm	80mm	50	Complete with 300mA driver
10107ED/W/V	White	White	CCT V	3000K-4000K-5000K	7W	560lm	60°	230V		75mm	100mm	50	Complete with 160mA driver
10112ED/W/V	White	White	CCT V	3000K-4000K-5000K	12W	960lm	60°	230V		95mm	90mm	50	Complete with 300mA driver



10120ED/W/V

10112ED/W/V

10107ED/W/V


The Dark Light Downlights

CCT V

10120ED | 20W | SMD | Aluminium





10120ED/W/V

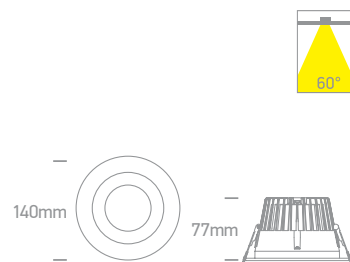

10130ED | 30W | SMD | Aluminium





10130ED/W/V

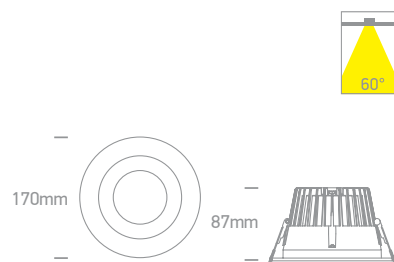

10140ED | 40W | SMD | Aluminium



10140ED/W/V

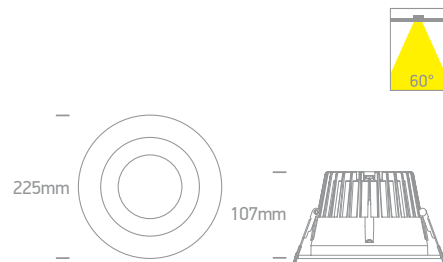

Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10120ED/W/V	White	White	CCT V	3000K-4000K-5000K	20W	1600lm	60°	230V		120mm	100mm	30	Complete with 500mA driver
10130ED/W/V	White	White	CCT V	3000K-4000K-5000K	30W	2400lm	60°	230V		145mm	110mm	20	Complete with 750mA driver
10140ED/W/V	White	White	CCT V	3000K-4000K-5000K	40W	3200lm	60°	230V		210mm	130mm	10	Complete with 1000mA driver

The Honeycomb Dark Light CCT V




10106DH/W/V

10106DH | 6,5W | COB | Aluminium

Complete with honeycomb.

new
DARK
LIGHT
IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10106DH/W/V	White	CCT V	3000K-3500K-4000K	6,5W	500lm	36°	700mA		40cm	63mm	60	50	Requires 700mA driver

The Honeycomb Dark Light

CCT V



10120DH/W/V


10110DH/B/V

10110DH | 10W | COB | Aluminium


Complete with honeycomb.



10110DH/W/V



10110DH/B/V




10114DH | 14W | COB | Aluminium


Complete with honeycomb.



10114DH/W/V



10114DH/B/V




10120DH | 20W | COB | Aluminium


Complete with honeycomb.



10120DH/W/V



10120DH/B/V




10130DH | 30W | COB | Aluminium


Complete with honeycomb.



10130DH/W/V



10130DH/B/V



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⌀	H	Box	Notes
10110DH/W/V	White	CCT V	3000K-3500K-4000K	10W	800lm	36°	230V	□	75mm	60mm	50	Complete with 250mA driver
10110DH/B/V	Black	CCT V	3000K-3500K-4000K	10W	800lm	36°	230V	□	75mm	60mm	50	Complete with 250mA driver
10114DH/W/V	White	CCT V	3000K-3500K-4000K	14W	1120lm	36°	230V	□	95mm	60mm	30	Complete with 350mA driver
10114DH/B/V	Black	CCT V	3000K-3500K-4000K	14W	1120lm	36°	230V	□	95mm	60mm	30	Complete with 350mA driver
10120DH/W/V	White	CCT V	3000K-3500K-4000K	20W	1600lm	36°	230V	□	120mm	60mm	20	Complete with 500mA driver
10120DH/B/V	Black	CCT V	3000K-3500K-4000K	20W	1600lm	36°	230V	□	120mm	60mm	20	Complete with 500mA driver
10130DH/W/V	White	CCT V	3000K-3500K-4000K	30W	2400lm	36°	230V	□	145mm	70mm	10	Complete with 750mA driver
10130DH/B/V	Black	CCT V	3000K-3500K-4000K	30W	2400lm	36°	230V	□	145mm	70mm	10	Complete with 750mA driver




10107Z/B/V + 050378A/BS

10107Z/W/V + 050378A/B

Retro Dark Light Range



CCT V

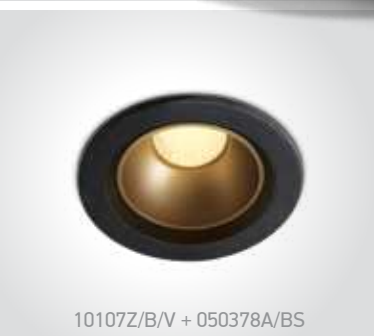

10107Z/B/V + 050378A/BS

10107Z | 7W | COB | Aluminium




Reflector must be ordered separately.



10112Z/B/V + 050378B/BS

10112Z | 12W | COB | Aluminium



Reflector must be ordered separately.

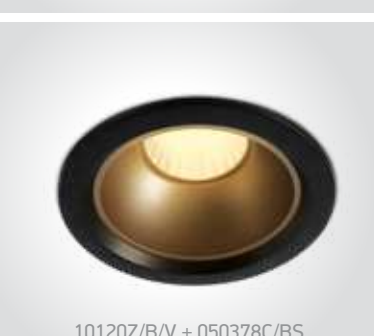


10120Z/B/V + 050378C/BS

10120Z | 20W | COB | Aluminium

Reflector must be ordered separately.

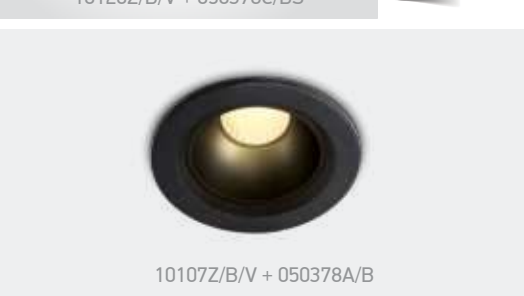

10107Z/B/V + 050378A/B

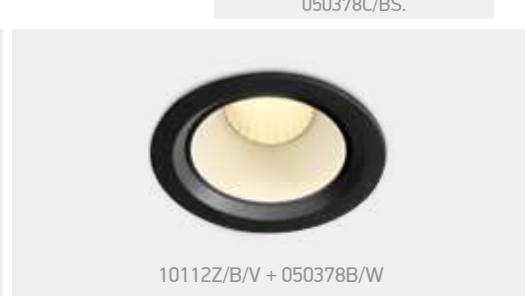

10112Z/B/V + 050378B/W




10120Z/B/V + 050378C/BS

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10107Z/B/V	Black	CCT V	3000K-3500K-4000K	7W	560lm	45°	230V			65mm	80mm	40	Complete with 160mA driver
10112Z/B/V	Black	CCT V	3000K-3500K-4000K	12W	960lm	45°	230V			82mm	88mm	30	Complete with 300mA driver
10120Z/B/V	Black	CCT V	3000K-3500K-4000K	20W	1600lm	45°	230V			105mm	105mm	20	Complete with 500mA driver


Retro Dark Light Range

CCT V

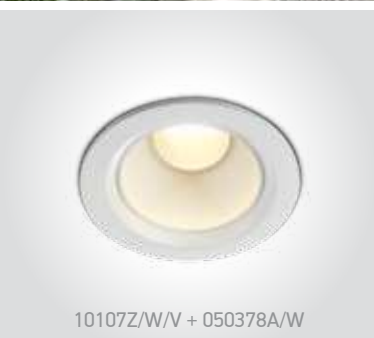


10107Z | 7W | COB | Aluminium

Reflector must be ordered separately.





10112Z | 12W | COB | Aluminium

Reflector must be ordered separately.



10120Z | 20W | COB | Aluminium

Reflector must be ordered separately.

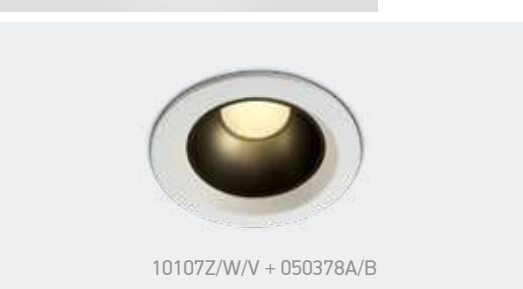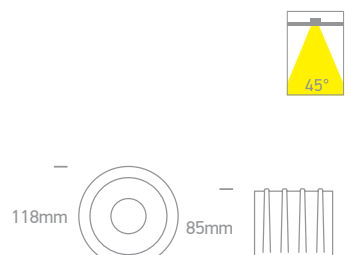

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10107Z/W/V	White	CCT V	3000K-3500K-4000K	7W	560lm	45°	230V			65mm	80mm	40	Complete with 160mA driver
10112Z/W/V	White	CCT V	3000K-3500K-4000K	12W	960lm	45°	230V			82mm	88mm	30	Complete with 300mA driver
10120Z/W/V	White	CCT V	3000K-3500K-4000K	20W	1600lm	45°	230V			105mm	105mm	20	Complete with 500mA driver

The Dark Light Dome Reflector Aluminium



10116FD | 16W | SMD | Aluminium




10116FD/W/BS



10116FD | 16W | SMD | Aluminium



10116FD/B/BS



Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
10116FD/W/BS	White	Brass	Warm white	3000K	16W	800lm	230V		155mm	80mm	20	Complete with 300mA driver
10116FD/B/BS	Black	Brass	Warm white	3000K	16W	800lm	230V		155mm	80mm	20	Complete with 300mA driver



10122FD/W/C

10116FD/W/C


10108FD/W/W

The Dark Light Dome Reflector Aluminium




10108FD/W/W

10108FD | 8W | SMD | Aluminium




10116FD/W/W

10116FD | 16W | SMD | Aluminium



10122FD/W/C

10122FD | 22W | SMD | Aluminium



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
10108FD/W/W	White	Warm white	3000K	8W	560lm	230V		94mm	60mm	45	Complete with 300mA driver
10116FD/W/C	White	Cool white	4000K	16W	1150lm	230V		155mm	80mm	20	Complete with 300mA driver
10116FD/W/W	White	Warm white	3000K	16W	1150lm	230V		155mm	80mm	20	Complete with 300mA driver
10122FD/W/C	White	Cool white	4000K	22W	1550lm	230V		210mm	90mm	20	Complete with 600mA driver





The IP20 SMD Dark Light Range


CCT V




10109D | 12W | SMD | Aluminium

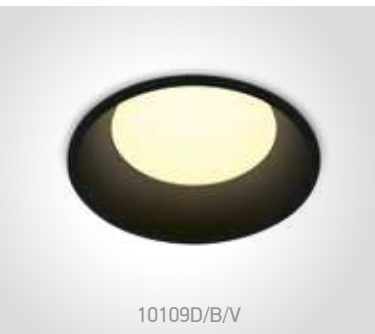


10109D | 12W | SMD | Aluminium



10122D | 22W | SMD | Aluminium



10122D | 22W | SMD | Aluminium





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⚡	⬆️	📦	Notes
10109D/W/V	White	CCT V	3000K-4000K-5000K	12W	1000lm	100°	230V	□	110mm	70mm	40	Complete with 300mA driver
10109D/B/V	Black	CCT V	3000K-4000K-5000K	12W	1000lm	100°	230V	□	110mm	70mm	40	Complete with 300mA driver
10122D/W/V	White	CCT V	3000K-4000K-5000K	22W	1900lm	100°	230V	□	165mm	75mm	20	Complete with 600mA driver
10122D/B/V	Black	CCT V	3000K-4000K-5000K	22W	1900lm	100°	230V	□	165mm	75mm	20	Complete with 600mA driver




The IP54 & IP65 SMD Dark Light Range CCT V




10109FD | 9W | SMD | Aluminium

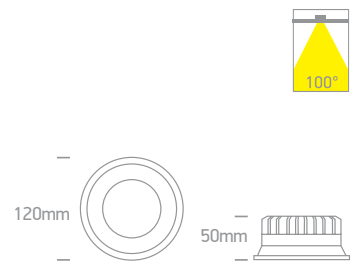

10109FD | 9W | SMD | Aluminium

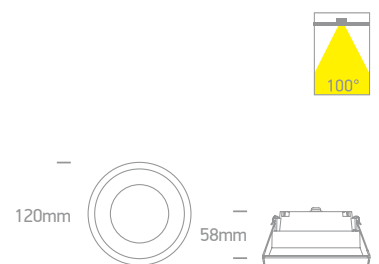

10120FD | 20W | SMD | Aluminium

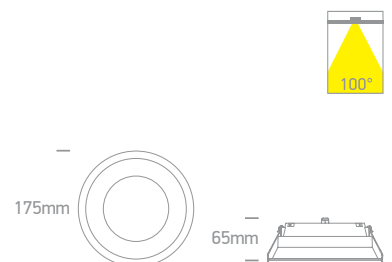


Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10109FD/W/C	White	Cool white	4000K	9W	765lm	100°	230V			111mm	70mm	40 Complete with 300mA driver
10109FD/W/V	White	CCT V	3000K-4000K-5000K	9W	900lm	100°	230V			111mm	80mm	40 Complete with 220mA driver
10109FD/B/V	Black	CCT V	3000K-4000K-5000K	9W	900lm	100°	230V			111mm	80mm	40 Complete with 220mA driver
10120FD/W/V	White	CCT V	3000K-4000K-5000K	20W	2000lm	100°	230V			166mm	85mm	20 Complete with 500mA driver
10120FD/B/V	Black	CCT V	3000K-4000K-5000K	20W	2000lm	100°	230V			166mm	85mm	20 Complete with 500mA driver



10113UV/W/V


UGR19 CCT V Range White

10107UV | 7W | SMD | Aluminium




10107UV/W/V

10113UV | 13W | SMD | Aluminium




10113UV/W/V

10120UV | 20W | SMD | Aluminium



10120UV/W/V

10130UV | 30W | SMD | Aluminium



10130UV/W/V

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
10107UV/W/V	White	CCT V	3000K-4000K-6000K	7W	525lm	230V		70mm	60mm	40	Complete with 180mA driver
10113UV/W/V	White	CCT V	3000K-4000K-6000K	13W	975lm	230V		120mm	70mm	20	Complete with 300mA driver
10120UV/W/V	White	CCT V	3000K-4000K-6000K	20W	1500lm	230V		170mm	75mm	20	Complete with 500mA driver
10130UV/W/V	White	CCT V	3000K-4000K-6000K	30W	2250lm	230V		210mm	80mm	20	Complete with 700mA driver

UGR19 CCT V Range Black

10113UV | 13W | SMD | Aluminium




10113UV/B/V



IP44




CCT Variable



10120UV | 20W | SMD | Aluminium




10120UV/B/V



IP44




CCT Variable



10130UV | 30W | SMD | Aluminium




10130UV/B/V



IP44



CCT Variable



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	⌀	↓	📦	Notes
10113UV/B/V	Black	CCT V	3000K-4000K-6000K	13W	975lm	230V	□	120mm	70mm	20	Complete with 300mA driver
10120UV/B/V	Black	CCT V	3000K-4000K-6000K	20W	1500lm	230V	□	170mm	75mm	20	Complete with 500mA driver
10130UV/B/V	Black	CCT V	3000K-4000K-6000K	30W	2250lm	230V	□	210mm	80mm	20	Complete with 700mA driver



50110U/W/V



50110UV/V




10124U/W/V

UGR19 CCT V Office Range Square

50110UV | 10W | SMD | Aluminium



CCT Variable





50110UV/W/V

50115UV | 15W | SMD | Aluminium



CCT Variable




50115UV/W/V

50125UV | 25W | SMD | Aluminium



CCT Variable




50125UV/W/V

50130UV | 30W | SMD | Aluminium



CCT Variable



50130UV/W/V

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Lighting	Height	Box	Notes
50110UV/W/V	White	CCT V	3000K-4000K-6000K	10W	1100lm	230V	□	85x85mm	70mm	40	Complete with 200mA driver
50115UV/W/V	White	CCT V	3000K-4000K-6000K	15W	1650lm	230V	□	130x130mm	70mm	20	Complete with 350mA driver
50125UV/W/V	White	CCT V	3000K-4000K-6000K	25W	2750lm	230V	□	160x160mm	70mm	20	Complete with 600mA driver
50130UV/W/V	White	CCT V	3000K-4000K-6000K	30W	3300lm	230V	□	205x205mm	80mm	10	Complete with 750mA driver


UGR19 CCT V Office Range Round



10110U | 10W | SMD | Aluminium




IP44




10124U | 24W | SMD | Aluminium




IP44



10130U | 30W | SMD | Aluminium



IP44



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
10110U/W/V	White	CCT V	3000K-4000K-6000K	10W	850lm	230V		86mm	55mm	40	Complete with 250mA driver
10124U/W/V	White	CCT V	3000K-4000K-6000K	24W	2000lm	230V		160mm	55mm	20	Complete with 500mA driver
10130U/W/V	White	CCT V	3000K-4000K-6000K	30W	2500lm	230V		205mm	65mm	10	Complete with 750mA driver

The IP54 Downlights



10113B/W/W

10113B | 13W | SMD | Aluminium

LED
BUILT IN80
CRI2
YEAR

IP54



10118B/W/W

10118B | 18W | SMD | Aluminium

LED
BUILT IN80
CRI2
YEAR

IP54



10125B/W/C

10125B | 25W | SMD | Aluminium

LED
BUILT IN80
CRI2
YEAR

IP54



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10113B/W/W	White	Warm white	3000K	13W	925lm	90°	230V		95mm	70mm	24	Complete with 300mA driver
10118B/W/C	White	Cool white	4000K	18W	1400lm	90°	230V		140mm	70mm	30	Complete with 500mA driver
10118B/W/W	White	Warm white	3000K	18W	1300lm	90°	230V		140mm	70mm	30	Complete with 500mA driver
10125B/W/C	White	Cool white	4000K	25W	2000lm	90°	230V		210mm	80mm	10	Complete with 720mA driver



10107B/W/V

10113B/W/V

10125B/W/V


The IP54 Downlights

CCT V

10107B | 7W | SMD | Aluminium



10107B/W/V



IP54




10113B | 13W | SMD | Aluminium



10113B/W/V



IP54




10125B | 25W | SMD | Aluminium



10125B/W/V



IP54



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⌀	Height	Box	Notes
10107B/W/V	White	CCT V	3000K-4000K-5000K	7W	540lm	90°	230V	□	65mm	70mm	50	Complete with 160mA driver
10113B/W/V	White	CCT V	3000K-4000K-5000K	13W	950lm	90°	230V	□	95mm	70mm	24	Complete with 300mA driver
10125B/W/V	White	CCT V	3000K-4000K-5000K	25W	2000lm	90°	230V	□	210mm	80mm	10	Complete with 650mA driver



The IP54 Downlights CCT V



10110BX | 10W | SMD | Aluminium



10115BX | 15W | SMD | Aluminium

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	Lighting	Height	Box	Notes
10110BX/W/V	White	CCT V	3000K-4000K-5000K	10W	900lm	90°	230V		75mm	60mm	50	Complete with 250mA driver
10110BX/B/V	Black	CCT V	3000K-4000K-5000K	10W	900lm	90°	230V		75mm	60mm	50	Complete with 250mA driver
10115BX/W/V	White	CCT V	3000K-4000K-5000K	15W	1350lm	90°	230V		95mm	60mm	30	Complete with 350mA driver
10115BX/B/V	Black	CCT V	3000K-4000K-5000K	15W	1350lm	90°	230V		95mm	60mm	30	Complete with 350mA driver



10120BX/B/V

10125BX/W/V

The IP54 & IP65 Downlights

CCT V


10120BX | 20W | SMD | Aluminium



new



10120BX/B/V




10125BX | 25W | SMD | Aluminium



new



10125BX/B/V




10130BX | 30W | SMD | Aluminium



new



10130BX/B/V



10120BX/W/V




10125BX/W/V



10130BX/W/V

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	U	H	Box	Notes
10120BX/W/V	White	CCT V	3000K-4000K-5000K	20W	1800lm	90°	230V	□	120mm	60mm	20	Complete with 500mA driver
10120BX/B/V	Black	CCT V	3000K-4000K-5000K	20W	1800lm	90°	230V	□	120mm	60mm	20	Complete with 500mA driver
10125BX/W/V	White	CCT V	3000K-4000K-5000K	25W	2250lm	90°	230V	□	170mm	80mm	20	Complete with 650mA driver
10125BX/B/V	Black	CCT V	3000K-4000K-5000K	25W	2250lm	90°	230V	□	170mm	80mm	20	Complete with 650mA driver
10130BX/W/V	White	CCT V	3000K-4000K-5000K	30W	2700lm	90°	230V	□	205mm	80mm	10	Complete with 700mA driver
10130BX/B/V	Black	CCT V	3000K-4000K-5000K	30W	2700lm	90°	230V	□	205mm	80mm	10	Complete with 700mA driver

The Dark Light Project Range

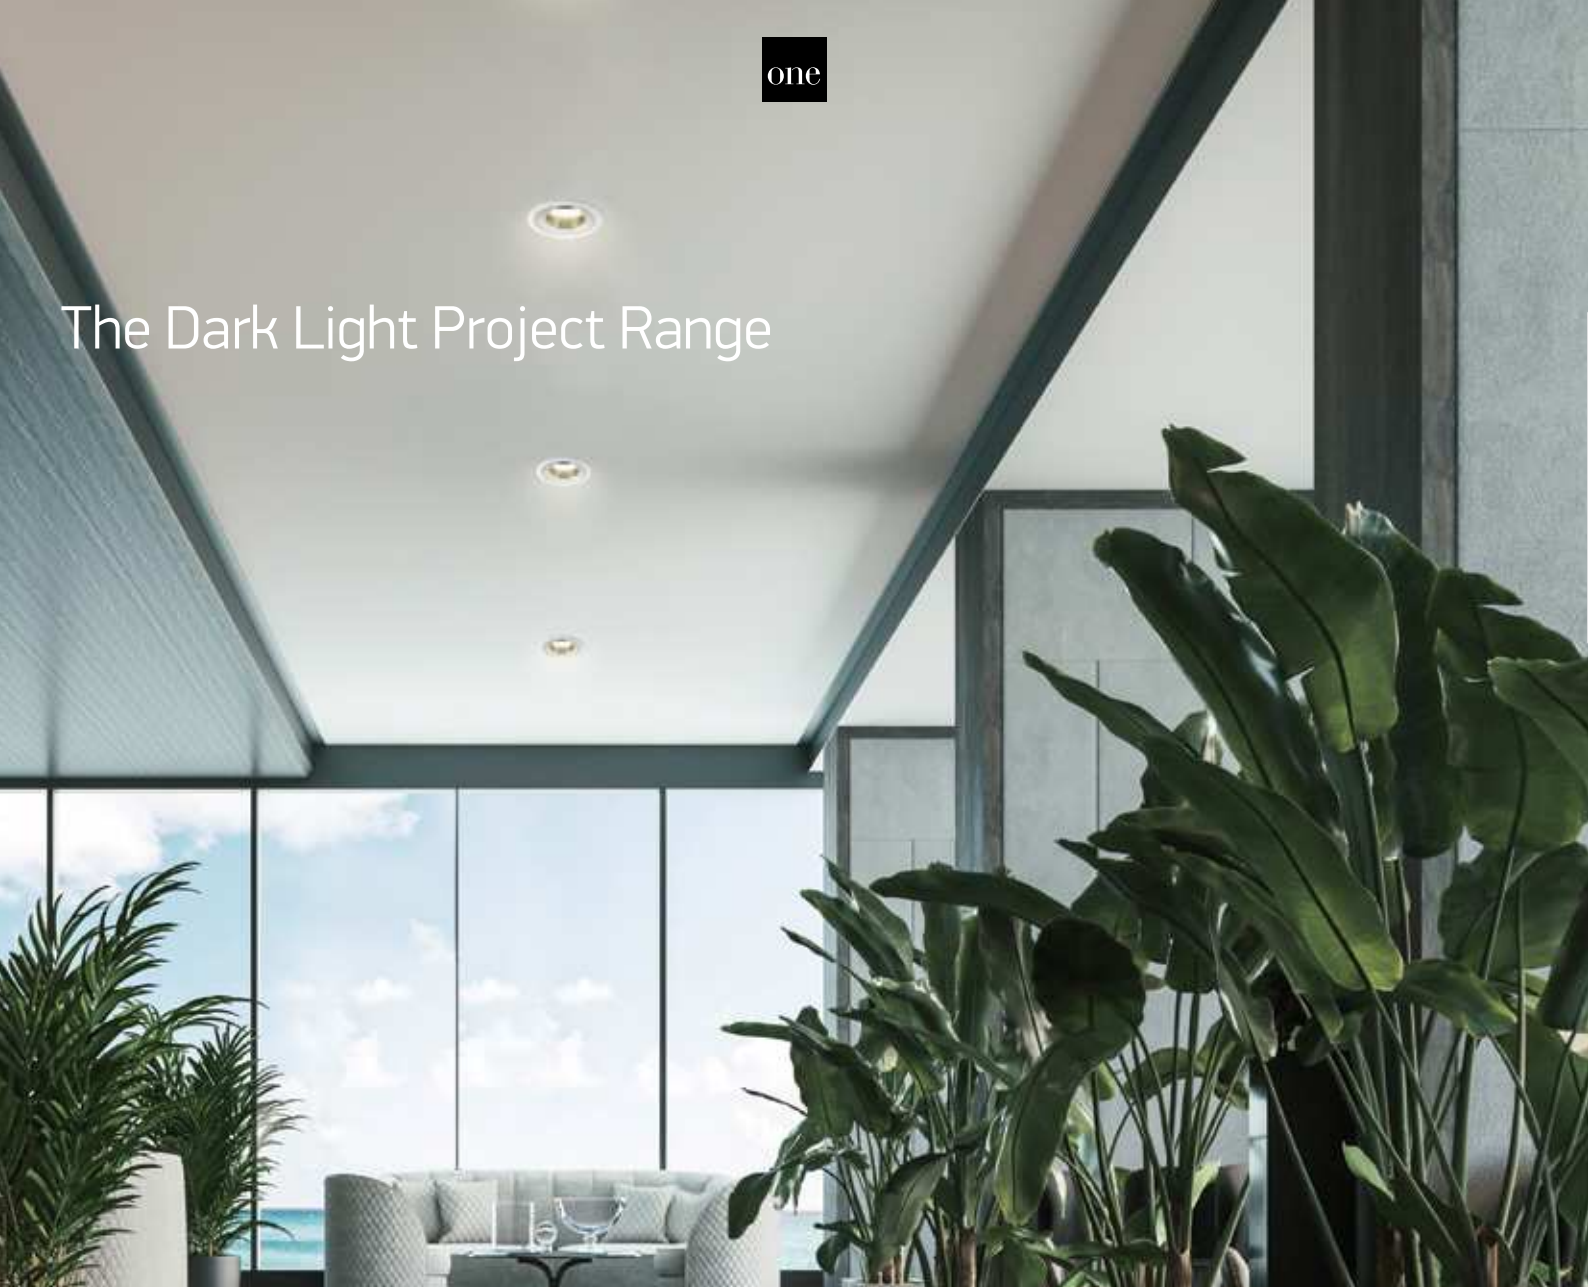

10110TD | 10W | SMD | Aluminium



10110TD/W/C



10125TD | 25W | SMD | Aluminium



10125TD/W/C



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10110TD/W/C	White	Cool white	4000K	10W	950lm	60°	230V		95mm	110mm	30	Complete with 250mA driver
10125TD/W/C	White	Cool white	4000K	25W	2400lm	60°	230V		210mm	140mm	12	Complete with 600mA driver
10125TD/W/W	White	Warm white	3000K	25W	2400lm	60°	230V		210mm	140mm	12	Complete with 600mA driver

The IP65 Frameless Range



10108CF | 8W | SMD | Aluminium + PC



IP65



10108CF/W

10115CF | 15W | SMD | Aluminium + PC



IP65



10115CF/W

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⚡	📏	📦	Notes
10108CF/C	White	Cool white	4000K	8W	660lm	120°	230V	□	80mm	50mm	40	Complete with 500mA driver
10108CF/W	White	Warm white	3000K	8W	660lm	120°	230V	□	80mm	50mm	40	Complete with 500mA driver
10115CF/C	White	Cool white	4000K	15W	1250lm	120°	230V	□	135mm	50mm	20	Complete with 500mA driver
10115CF/W	White	Warm white	3000K	15W	1250lm	120°	230V	□	135mm	50mm	20	Complete with 500mA driver

The Outdoor/Bathroom IP65 Range



10110G/W/W

10110G | 10W | COB | Aluminium



IP65



10115G/W/W

10115G | 15W | COB | Aluminium



IP65



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10110G/W/C	White	Cool white	4000K	10W	800lm	60°	230V		200cm	82mm	90mm	30	Complete with 250mA driver
10110G/W/W	White	Warm white	3000K	10W	750lm	60°	230V		200cm	82mm	90mm	30	Complete with 250mA driver
10115G/W/W	White	Warm white	3000K	15W	1125lm	60°	230V		200cm	100mm	95mm	20	Complete with 350mA driver



The COB IP65 Downlights

CCT V

10112GA | 12W | COB | Aluminium




10112GA/W/V



10118GA | 18W | COB | Aluminium



10118GA/W/V



10125GA | 25W | COB | Aluminium




10125GA/W/V



10135GA | 35W | COB | Aluminium



10135GA/W/V



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	Light	Height	Box	Notes
10112GA/W/V	White	CCT V	3000K-3500K-4000K	12W	1200lm	40°	230V	□	75mm	60mm	40	Complete with 300mA driver
10118GA/W/V	White	CCT V	3000K-3500K-4000K	18W	1800lm	40°	230V	□	95mm	65mm	20	Complete with 450mA driver
10125GA/W/V	White	CCT V	3000K-3500K-4000K	25W	2500lm	40°	230V	□	120mm	80mm	10	Complete with 600mA driver
10135GA/W/V	White	CCT V	3000K-3500K-4000K	35W	3500lm	40°	230V	□	145mm	90mm	10	Complete with 900mA driver

The COB IP65 Darklight

CCT V

10112G | 12W | COB | Aluminium



10112G/W/V

LED
BUILT IN

new



10112G/B/V

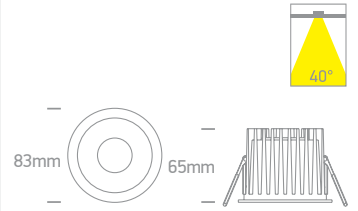
10118G | 18W | COB | Aluminium



10118G/W/V

LED
BUILT IN

new



10118G/B/V

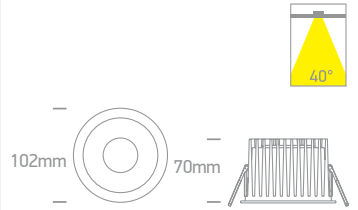
10125G | 25W | COB | Aluminium



10125G/W/V

LED
BUILT IN

new



10125G/B/V

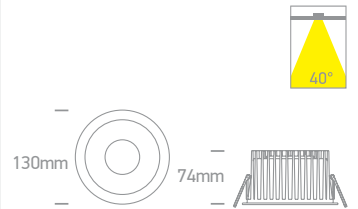
10135G | 35W | COB | Aluminium



10135G/W/V

LED
BUILT IN

new



10135G/B/V

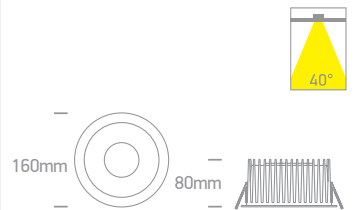
10140G | 40W | COB | Aluminium



10140G/W/V

LED
BUILT IN

new



10140G/B/V

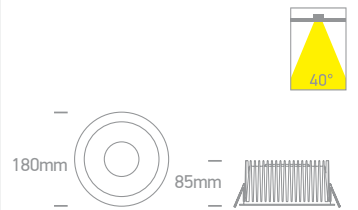

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	Light	Height	Box	Notes
10112G/W/V	White	CCT V	3000K-3500K-4000K	12W	1200lm	40°	230V		74mm	80mm	40	Complete with 300mA driver
10112G/B/V	Black	CCT V	3000K-3500K-4000K	12W	1200lm	40°	230V		74mm	80mm	40	Complete with 300mA driver
10118G/W/V	White	CCT V	3000K-3500K-4000K	18W	1800lm	40°	230V		93mm	90mm	20	Complete with 450mA driver
10118G/B/V	Black	CCT V	3000K-3500K-4000K	18W	1800lm	40°	230V		93mm	90mm	20	Complete with 450mA driver
10125G/W/V	White	CCT V	3000K-3500K-4000K	25W	2500lm	40°	230V		118mm	100mm	10	Complete with 600mA driver
10125G/B/V	Black	CCT V	3000K-3500K-4000K	25W	2500lm	40°	230V		118mm	100mm	10	Complete with 600mA driver
10135G/W/V	White	CCT V	3000K-3500K-4000K	35W	3500lm	40°	230V		145mm	120mm	10	Complete with 900mA driver
10135G/B/V	Black	CCT V	3000K-3500K-4000K	35W	3500lm	40°	230V		145mm	120mm	10	Complete with 900mA driver
10140G/W/V	White	CCT V	3000K-3500K-4000K	40W	4000lm	40°	230V		165mm	130mm	10	Complete with 1050mA driver
10140G/B/V	Black	CCT V	3000K-3500K-4000K	40W	4000lm	40°	230V		165mm	130mm	10	Complete with 1050mA driver