



Strips & Profiles

Pages 177-236

07



The Flex Tiles






7848 | 10W | SMD 2835 | 288LEDs/pc | Flex tile

3M Double face adhesive.



IP20






7848/RGBW | 24W | SMD 5050 | 162LEDs/pc | Flex tile

3M Double face adhesive.



IP20



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7848/C	Cool white	4000K	10W	900lm	24V DC	III	2	Requires 24V DC driver
7848/W	Warm white	3000K	10W	850lm	24V DC	III	2	Requires 24V DC driver
7848/RGBW	RGB + Warm white	RGB + 3000K	RGB 18W + WW 6W	480lm (3000K)	24V DC	III	2	Requires 24V DC driver

The Ultra Slim Range 24V




7843 | 4W/m | COB | 480LEDs/m | Ultra slim

3M Double face adhesive.




IP20




7843E | 10W/m | COB | 400LEDs/m | Ultra slim

3M Double face adhesive.




IP20





7823 | 9,6W/m | SMD 2216 | 140LEDs/m | Ultra slim

3M Double face adhesive.




IP20

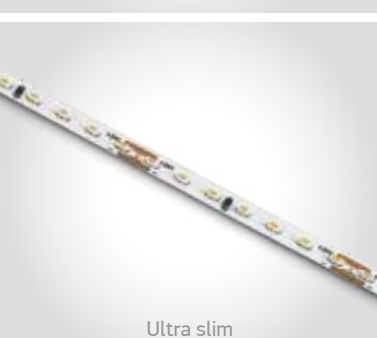


7833 | 14,4W/m | SMD 2110 | 196LEDs/m | Ultra slim

3M Double face adhesive.



IP20



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Notes
7843/C	Cool white	4000K	4W/m	440lm/m	24V DC	III	Requires 24V DC driver
7843/W	Warm white	3000K	4W/m	410lm/m	24V DC	III	Requires 24V DC driver
7843E/C	Cool white	4000K	10W/m	900lm/m	24V DC	III	Requires 24V DC driver
7843E/W	Warm white	3000K	10W/m	810lm/m	24V DC	III	Requires 24V DC driver
7843E/EW	Extra warm white	2700K	10W/m	790lm/m	24V DC	III	Requires 24V DC driver
7823/C	Cool white	4000K	9,6W/m	970lm/m	24V DC	III	Requires 24V DC driver
7823/W	Warm white	3000K	9,6W/m	864lm/m	24V DC	III	Requires 24V DC driver
7823/EW	Extra warm white	2700K	9,6W/m	768lm/m	24V DC	III	Requires 24V DC driver
7833/C	Cool white	4000K	14,4W/m	1300lm/m	24V DC	III	Requires 24V DC driver
7833/W	Warm white	3000K	14,4W/m	1200lm/m	24V DC	III	Requires 24V DC driver
7833/EW	Extra warm white	2700K	14,4W/m	1160lm/m	24V DC	III	Requires 24V DC driver

The 4,8W/m Indoor 24V




7820/D



7820 | 4,8W/m | SMD 2216 | 70LEDs/m


3M Double face adhesive.



IP20



Supplied in 5m roll.



Dimming remote control.
Order code 20030.



Cut every 10cm
(7-LED segment)



7824

7822

Accessories for 7820



7824 Power supply cable
7822 Connector



062002 | Display box for LED strips 7820/C, 7820/W, 7820W/C, 7829/C, 7829A/W, 7835/EW, 7835W/W, 7880/C, 7830/RGBW, 7846/RGB, 7846/RGBW, 7839/W, 7843/W, 7844/EW, 7846/W, 7846W/W, 7846WA/W, 7844/A, 7841A/W & 7841B/W




IP20

offer



Requires 24V DC driver




Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7820/D	Daylight	6000K	4,8W/m	490lm/m	24V DC	III	40	Requires 24V DC driver
7820/C	Cool white	4000K	4,8W/m	490lm/m	24V DC	III	40	Requires 24V DC driver
7820/W	Warm white	3000K	4,8W/m	432lm/m	24V DC	III	40	Requires 24V DC driver
7820/EW	Extra warm white	2700K	4,8W/m	384lm/m	24V DC	III	40	Requires 24V DC driver
7820/UW	Ultra warm white	2200K	4,8W/m	384lm/m	24V DC	III	40	Requires 24V DC driver

The 4,8W/m Outdoor 24V



7820W | 4,8W/m | SMD 2216 | 70LEDs/m | Silicone

3M Double face adhesive.



IP68



Supplied in 5m roll.



Dimming remote control.
Order code 20030.



Cut every 10cm
(7-LED segment)
10mm



7826

7828

Accessories for 7820W



7826 Mounting clip
7828 End cap

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7820W/D	Daylight	6000K	4,8W/m	432lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7820W/C	Cool white	4000K	4,8W/m	432lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7820W/W	Warm white	3000K	4,8W/m	390lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7820W/EW	Extra warm white	2700K	4,8W/m	375lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight

The 9,6W/m 24V



7829A | 9,6W/m | SMD 2835 | 70LEDs/m

3M Double face adhesive.



IP20



Supplied in 5m roll.



Dimming remote control.
Order code 20030.




Cut every 10cm
(7-LED segment)



7829 | 9,6W/m | SMD 2216 | 140LEDs/m

3M Double face adhesive.



IP20



Supplied in 5m roll.



Dimming remote control.
Order code 20030.



Cut every 5cm
(7-LED segment)



7824

7822

Accessories for 7829A & 7829



7824 Power supply cable

7822 Connector

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7829A/C	Cool white	4000K	9,6W/m	990lm/m	24V DC	III	40	Requires 24V DC driver
7829A/W	Warm white	3000K	9,6W/m	970lm/m	24V DC	III	40	Requires 24V DC driver
7829A/EW	Extra warm white	2700K	9,6W/m	880lm/m	24V DC	III	40	Requires 24V DC driver
7829/C	Cool white	4000K	9,6W/m	970lm/m	24V DC	III	40	Requires 24V DC driver
7829/W	Warm white	3000K	9,6W/m	864lm/m	24V DC	III	40	Requires 24V DC driver
7829/EW	Extra warm white	2700K	9,6W/m	768lm/m	24V DC	III	40	Requires 24V DC driver




The 9,6W/m Outdoor 24V



7829AW | 9,6W/m | SMD 2835 | 70LEDs/m | Silicone

3M Double face adhesive.



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Box	Notes
7829AW/C	Cool white	4000K	9,6W/m	920lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7829AW/W	Warm white	3000K	9,6W/m	900lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7829AW/EW	Extra warm white	2700K	9,6W/m	810lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight



The 14,4W/m Indoor 24V




7835 | 14,4W/m | SMD 2835 | 70LEDs/m

3M Double face adhesive.



Supplied in 5m roll.



Dimming remote control.
Order code 20030.



Cut every 10cm
(7-LED segment)



7835P

7837

Accessories for 7835



7835P Power supply cable
7837 Connector

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7835/D	Daylight	6000K	14,4W/m	1300lm/m	24V DC	III	40	Requires 24V DC driver
7835/C	Cool white	4000K	14,4W/m	1300lm/m	24V DC	III	40	Requires 24V DC driver
7835/W	Warm white	3000K	14,4W/m	1200lm/m	24V DC	III	40	Requires 24V DC driver
7835/EW	Extra warm white	2700K	14,4W/m	1125lm/m	24V DC	III	40	Requires 24V DC driver
7835/UW	Ultra warm white	2200K	14,4W/m	1125lm/m	24V DC	III	40	Requires 24V DC driver




The 14,4W/m Outdoor 24V



7835W | 14,4W/m | SMD 2835 | 70LEDs/m | Silicone

3M Double face adhesive.



IP68



Cut every 10cm
(7-LED segment)
12mm



7827 | Mounting clip for 7835W



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7835W/D	Daylight	6000K	14,4W/m	1170lm/m	24V DC		40	Requires 24V DC driver / Avoid direct sunlight
7835W/C	Cool white	4000K	14,4W/m	1170lm/m	24V DC		40	Requires 24V DC driver / Avoid direct sunlight
7835W/W	Warm white	3000K	14,4W/m	1050lm/m	24V DC		40	Requires 24V DC driver / Avoid direct sunlight
7835W/EW	Extra warm white	2700K	14,4W/m	1050lm/m	24V DC		40	Requires 24V DC driver / Avoid direct sunlight

The COB Strips 8mm

one



7839 | 4W/m | COB | 320LEDs/m

3M Double face adhesive.



IP20




7844 | 8W/m | COB | 320LEDs/m

3M Double face adhesive.




IP20



7844E | 10W/m | COB | 480LEDs/m

3M Double face adhesive.



IP20




Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7839/C	Cool white	4000K	4W/m	400lm/m	24V DC	III	40	Requires 24V DC driver
7839/W	Warm white	3000K	4W/m	380lm/m	24V DC	III	40	Requires 24V DC driver
7839/EW	Extra warm white	2700K	4W/m	360lm/m	24V DC	III	40	Requires 24V DC driver
7844/C	Cool white	4000K	8W/m	810lm/m	24V DC	III	40	Requires 24V DC driver
7844/W	Warm white	3000K	8W/m	730lm/m	24V DC	III	40	Requires 24V DC driver
7844/EW	Extra warm white	2700K	8W/m	680lm/m	24V DC	III	40	Requires 24V DC driver
7844E/C	Cool white	4000K	10W/m	950lm/m	24V DC	III	40	Requires 24V DC driver
7844E/W	Warm white	3000K	10W/m	860lm/m	24V DC	III	40	Requires 24V DC driver
7844E/EW	Extra warm white	2700K	10W/m	820lm/m	24V DC	III	40	Requires 24V DC driver

The COB Strips 10mm



7846 | 14W/m | COB | 512LEDs/m


3M Double face adhesive.



IP20




Supplied in 5m roll.



Dimming remote control.
Order code 20030.




Cut every 6,25cm
10mm

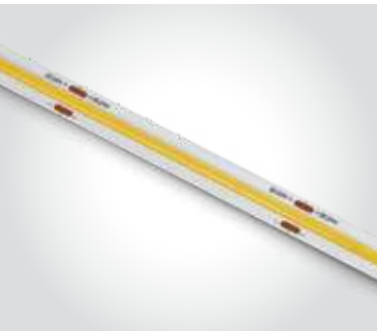

7846H | 14,5W/m | COB | 480LEDs/m | High efficiency | 150lm/W

3M Double face adhesive.



new

IP20



Supplied in 5m roll.



Cut every 5cm
10mm



7846B
Corner connector for 7846 and 7846H



7846C
Connector for 7846 and 7846H




7846P
Power supply for 7846 and 7846H

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7846/C	Cool white	4000K	14W/m	1470lm/m	24V DC	III	50	Requires 24V DC driver
7846/W	Warm white	3000K	14W/m	1420lm/m	24V DC	III	50	Requires 24V DC driver
7846/EW	Extra warm white	2700K	14W/m	1200lm/m	24V DC	III	50	Requires 24V DC driver
7846H/C	Cool white	4000K	14,5W/m	2175lm/m	24V DC	III	50	Requires 24V DC driver
7846H/W	Warm white	3000K	14,5W/m	2175lm/m	24V DC	III	50	Requires 24V DC driver


The IP67 COB Strips

4-8W/m

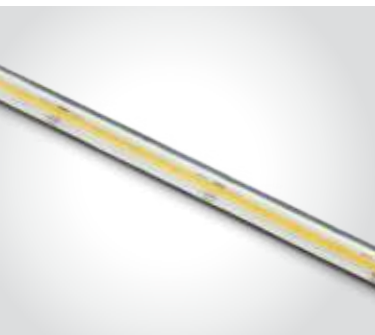


7839W | 4W/m | COB | 320LEDs/m | Silicone

3M Double face adhesive.



Supplied in 5m roll.




7844W | 8W/m | COB | 320LEDs/m | Silicone

3M Double face adhesive.



Supplied in 5m roll.




Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7839W/C	Cool white	4000K	4W/m	430lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7839W/W	Warm white	3000K	4W/m	410lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7844W/C	Cool white	4000K	8W/m	840lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7844W/W	Warm white	3000K	8W/m	810lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight




7846WA/W

IP67 & IP68 COB Strips

10-14W/m

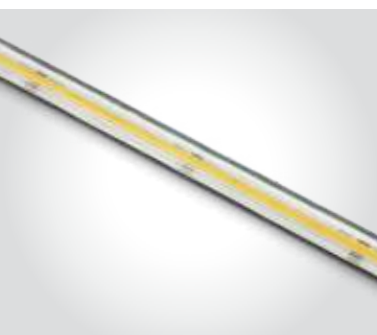
7846W | 14W/m | COB | 512LEDs/m | Silicone


3M Double face adhesive.



Supplied in 5m roll.

Dimming remote control.
Order code 20030.7846E End cap
for 7846WCut every 6,25cm
12,5mm
7846WA | 10W/m | COB | 512LEDs/m | Silicone

3M Double face adhesive.



Supplied in 5m roll.

Dimming remote control.
Order code 20030.7846WE End cap
for 7846WACut every 6,25cm
10mm7846WP 24V Power supply
for 7846WA7846WC Connector
for 7846WA7846WB Corner connector
for 7846WA7827A Mounting clip
for 7846W and 7846WA


Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7846W/C	Cool white	4000K	14W/m	1350lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7846W/W	Warm white	3000K	14W/m	1220lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7846WA/C	Cool white	4000K	10W/m	700lm/m	24V DC	III	50	Requires 24V DC driver / Avoid direct sunlight
7846WA/W	Warm white	3000K	10W/m	650lm/m	24V DC	III	50	Requires 24V DC driver / Avoid direct sunlight

Connect In One Length Range 24V



7844L | 7,5W/m | COB | 480LEDs/m


Can be connected in 20m full length / 3M Double face adhesive.



new
IP20




Cut every 5cm
(24-LED segment)

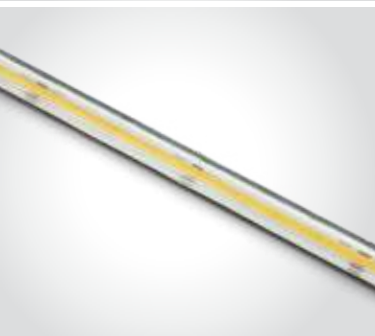

7844LW | 7,5W/m | COB | 480LEDs/m | Silicone


Can be connected in 20m full length / 3M Double face adhesive.



new
IP67



Cut every 5cm
(24-LED segment)




7820WL | 4,8W/m | SMD 2216 | 60LEDs/m | Silicone

Can be connected in 15m full length / 3M Double face adhesive.



IP68



Cut every 10cm
(6-LED segment)



Accessories for 7820WL



7826 Mounting clip
7828 End cap

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7844L/C	Cool white	4000K	7,5W/m	700lm/m	24V DC	III	10	Requires 24V DC driver
7844L/W	Warm white	3000K	7,5W/m	675lm/m	24V DC	III	10	Requires 24V DC driver
7844LW/C	Cool white	4000K	7,5W/m	700lm/m	24V DC	III	10	Requires 24V DC driver / Avoid direct sunlight
7844LW/W	Warm white	3000K	7,5W/m	675lm/m	24V DC	III	10	Requires 24V DC driver / Avoid direct sunlight
7820WL/W	Warm white	3000K	4,8W/m	302lm/m	24V DC	III	20	Requires 24V DC driver / Avoid direct sunlight



The Vertical Light Range 24V



7820V | 4,8W/m | SMD 3014 | 60LEDs/m | Vertical light


3M Double face adhesive.



Supplied in 5m roll.



Dimming remote control.
Order code 20030.




7835V | 14,4W/m | SMD 3014 | 120LEDs/m | Vertical light


3M Double face adhesive.



Supplied in 5m roll.



Dimming remote control.
Order code 20030.



Accessories for 7820V & 7835V



7824 Power supply cable
7822 Connector

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7820V/C	Cool white	4000K	4,8W/m	500lm/m	24V DC	III	40	Requires 24V DC driver
7820V/W	Warm white	3000K	4,8W/m	450lm/m	24V DC	III	40	Requires 24V DC driver
7835V/W	Warm white	3000K	14,4W/m	1152lm/m	24V DC	III	40	Requires 24V DC driver

The 19,2W/m Indoor 24V




7825 | 19,2W/m | SMD 2835 | 140LEDs/m


3M Double face adhesive.



Supplied in 5m roll.



Accessories
7835P Power supply
cable & 7837 Connector.




7870 | 19,2W/m | SMD 2216 | 238LEDs/m


3M Double face adhesive.



Supplied in 5m roll.



Accessories
7835P Power supply
cable & 7837 Connector.



7875 | 19,2W/m | SMD 2216 | 240LEDs/m

3M Double face adhesive.



Supplied in 5m roll.



Accessories
7835P Power supply
cable & 7837 Connector.



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7825/C	Cool white	4000K	19,2W/m	1728lm/m	24V DC	II	40	Requires 24V DC driver
7825/W	Warm white	3000K	19,2W/m	1536lm/m	24V DC	II	40	Requires 24V DC driver
7825/EW	Extra warm white	2700K	19,2W/m	1536lm/m	24V DC	II	40	Requires 24V DC driver
7870/C	Cool white	4000K	19,2W/m	1940lm/m	24V DC	II	40	Requires 24V DC driver
7870/W	Warm white	3000K	19,2W/m	1728lm/m	24V DC	II	40	Requires 24V DC driver
7875/C	Cool white	4000K	19,2W/m	1750lm/m	24V DC	II	40	Requires 24V DC driver
7875/W	Warm white	3000K	19,2W/m	1700lm/m	24V DC	II	40	Requires 24V DC driver



The 24W/m Indoor 24V



7845 | 24W/m | SMD 2216 | 280LEDs/m

3M Double face adhesive.




Supplied in 5m roll.



Cut every 2,5cm
(7-LED segment)

10mm

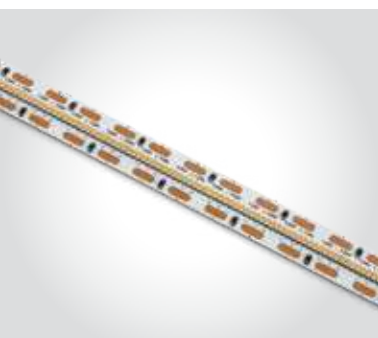

7887 | 24W/m | SMD 2110 | 700LEDs/m

3M Double face adhesive.



Supplied in 5m roll.



Cut every 1cm
(7-LED segment)

12mm


Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7845/C	Cool white	4000K	24W/m	2450lm/m	24V DC	III	40	Requires 24V DC driver
7845/W	Warm white	3000K	24W/m	2200lm/m	24V DC	III	40	Requires 24V DC driver
7887/W	Warm white	3000K	24W/m	2050lm/m	24V DC	III	40	Requires 24V DC driver

The High Power Strips




7880 | 28,8W/m | SMD 2835 | 120LEDs/m

3M Double face adhesive.



IP20



Supplied in 5m roll.



7882 | 42W/m | SMD 2835 | 240LEDs/m


3M Double face adhesive.



IP20



Supplied in 2m roll.



7884 | 33W/m | SMD 2835 | 320LEDs/m


3M Double face adhesive.



IP20



Supplied in 5m roll.



7885 | 48W/m | SMD 2835 | 294LEDs/m


3M Double face adhesive.



IP20




Supplied in 2m roll.



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7880/C	Cool white	4000K	28,8W/m	2304lm/m	24V DC	III	40	Requires 24V DC driver
7880/W	Warm white	3000K	28,8W/m	2260lm/m	24V DC	III	40	Requires 24V DC driver
7882/W	Warm white	3000K	42W/m	6100lm/m	24V DC	III	40	Requires 24V DC driver
7884/C	Cool white	4000K	33W/m	4700lm/m	24V DC	III	20	Requires 24V DC driver
7884/W	Warm white	3000K	33W/m	4100lm/m	24V DC	III	20	Requires 24V DC driver
7885/C	Cool white	4000K	48W/m	4850lm/m	24V DC	III	20	Requires 24V DC driver
7885/W	Warm white	3000K	48W/m	4400lm/m	24V DC	III	20	Requires 24V DC driver

The High Power COB Strips

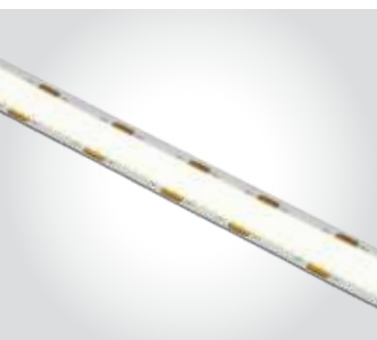

7887A | 25W/m | COB | 960LEDs/m

3M Double face adhesive.




new
IP20



Supplied in 5m roll.



Cut every 5cm
15mm

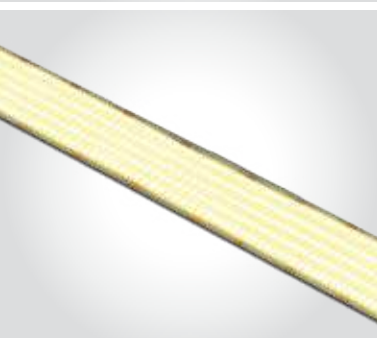

7887B | 40W/m | COB | 1600LEDs/m

3M Double face adhesive.



new
IP20



Supplied in 5m roll.



Cut every 2,5cm
30mm

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7887A/C	Cool white	4000K	25W/m	2550lm/m	24V DC	III	50	Requires 24V DC driver
7887A/W	Warm white	3000K	25W/m	2550lm/m	24V DC	III	50	Requires 24V DC driver
7887B/C	Cool white	4000K	40W/m	4200lm/m	24V DC	III	20	Requires 24V DC driver
7887B/W	Warm white	3000K	40W/m	4200lm/m	24V DC	III	20	Requires 24V DC driver

The COB Amber Strip



7844 | 10W/m | COB | 480LEDs/m

Supplied in 5m roll / 3M Double face adhesive.



LED
BUILT IN DIMMABLE

5
YEAR



IP20



Dimming remote control.
Order code 20030.



Cut every 5cm
(24-LED segment)


8mm

Order Code	Light Colour	CCT (K)	Watts	Input	Class		Notes
7844/A	Amber	2000K	10W/m	24V DC		50	Requires 24V DC driver

6000K

2700K


The Variable Colour Temperature Range

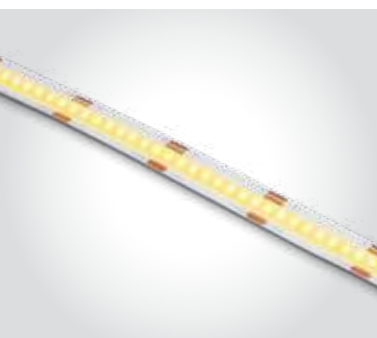


7846/DEW | 14W/m | COB | 608LEDs/m

3M Double face adhesive.

new
IP20



Supplied in 5m roll.



Variable colour temperature.



Cut every 2,63cm
(16-LED segment)



7835/DEW | 20W/m | SMD 2835 | 120LEDs/m

3M Double face adhesive.

IP20



Supplied in 5m roll.



Variable colour temperature.



Cut every 10cm
(12-LED segment)




20032 | 12-24V DC | Variable colour temperature controller & dimmer | 2 channels x 3A

IP20



Remote controller for changing colour temperature from extra warm white to daylight. Suitable for use with LED strips 7835/DEW. 50 meters range, includes dimmer control and programme mode.

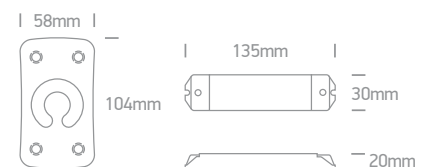

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7846/DEW	Extra warm white - Daylight	2700K-6500K	14W/m	630lm/m (EW) + 770lm/m (D)	24V DC	III	50	Requires 24V DC driver
7835/DEW	Extra warm white - Daylight	2700K-6500K	20W/m	700lm/m (EW) + 900lm/m (D)	24V DC	III	40	Requires 24V DC driver

The Blue LED Strips 24V



7820/BL | 4,8W/m | SMD 3528 | 60LEDs/m

3M Double face adhesive.



LED
BUILT IN DIMMABLE

5
YEAR

IP20



Supplied in 5m roll.



Dimming remote control.
Order code 20030.



Cut every 10cm
(6-LED segment)

8mm



7820W/BL | 4,8W/m | SMD 3528 | 60LEDs/m | Silicone

3M Double face adhesive.



LED
BUILT IN DIMMABLE

3
YEAR

IP68



Supplied in 5m roll.



Dimming remote control.
Order code 20030.



Cut every 10cm
(6-LED segment)


12mm

Order Code	Light Colour	Watts	Input	Class		Notes
7820/BL	Blue	4,8W/m	24V DC		40	Requires 24V DC driver
7820W/BL	Blue	4,8W/m	24V DC		40	Requires 24V DC driver / Avoid direct sunlight


RGB Set



7820A/RGB | 2W/m/color | SMD 5050 | 30LEDs/m



IP20



Supplied in 5m roll.

10mm ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐

Order Code	Light Colour	CCT (K)	Watts	Input	Class		Notes
7820A/RGB	RGB	-	2W/m/color	230V / 12V DC		10	Set of LED strip + remote





one

The RGB & RGBW Strips 24V




7830/RGB | 14,4W/m | SMD 5050 | 60LEDs/m

Supplied in 5m roll / 3M Double face adhesive.




7830/RGBW | 19,2W/m | SMD 5050 | 60LEDs/m

Supplied in 5m roll / 3M Double face adhesive.





7846/RGB | 15W/m | COB | 840LEDs/m | RGB

Supplied in 5m roll / 3M Double face adhesive.



7846/RGBW | 18W/m | COB | 840LEDs/m

Supplied in 5m roll / 3M Double face adhesive.



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7830/RGB	RGB	-	14,4W/m	-	24V DC	III	40	Requires 24V DC driver
7830/RGBW	RGB + Warm white	RGB + 3000K	RGB 14,4W/m + WW 4,8W/m	408lm/m (3000K)	24V DC	III	40	Requires 24V DC driver
7846/RGB	RGB	-	15W/m	-	24V DC	III	50	Requires 24V DC driver
7846/RGBW	RGB + Warm white	RGB + 3000K	RGB 12W/m + WW 6W/m	500lm/m (3000K)	24V DC	III	50	Requires 24V DC driver



The Outdoor RGB & RGBW Strip 24V



7830W/RGB | 14,4W/m | SMD 5050 | 60LEDs/m | Silicone

Supplied in 5m roll / 3M Double face adhesive.



LED
BUILT IN



CE

IP68

3
YEAR



Dimming remote control.
Order code 20034.



DALI & Push to DIM controller.
Order code 89100LP.



7827 Mounting clip
for 7830W/RGB



Cut every 10cm
(6-LED segment)



7830W/RGBW | 19,2W/m | SMD 5050 | 60LEDs/m | Silicone

Supplied in 5m roll / 3M Double face adhesive.



LED
BUILT IN



CE

IP68

3
YEAR



Dimming remote control.
Order code 20036.



DALI & Push to DIM controller.
Order code 89100LP.



7827A Mounting clip
for 7830W/RGBW



Cut every 10cm
(6-LED segment)



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7830W/RGB	RGB	-	14,4W/m	-	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7830W/RGBW	RGB + Warm white	RGB + 3000K	RGB 14,4W/m + WW 4,8W/m	367lm/m (3000K)	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight

Digital SPI Strips


7940 | Wall-to-wall kit | Aluminium | Suitable for LED Strips up to 15mm

Requires 7940A/B or 7940B/B.



- ① Mounting Base
- ② Rod
- ③ Connector

Base Diameter 62mm



7940/B

7940A | 10m Metal belt for 7940

7940B | 20m Metal belt for 7940

Suitable for LED Strips up to 15mm.




7940B/B


7940A/B

7820B/RGBW | 19W/m | SMD | 60LEDs/m | SPI | TUYA

3M Double face adhesive.



Supplied in 5m roll.



40 preprogrammed modes.

tuya




Cut every 10cm


10mm

7820C/RGBW | 19W/m | SMD | 60LEDs/m | SPI | TUYA

3M Double face adhesive.



Supplied in 10m roll.



40 preprogrammed modes.

tuya



Cut every 10cm


10mm

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7820B/RGBW	RGB + Warm white	RGB + 3000K	19W/m	292lm/m (3000K)	24V DC		25	Set of LED strip+remote / Requires 24V DC driver
7820C/RGBW	RGB + Warm white	RGB + 3000K	19W/m	292lm/m (3000K)	24V DC		25	Set of LED strip+remote / Requires 24V DC driver

The Flexible Lens Strip Asymmetric






7890 | 18W/m | SMD | Silicone



new
IP65

CE

2
YEAR



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7890/C	Cool white	4000K	18W/m	1620lm/m	15x45°	24V DC		100cm	4	Requires 24V DC driver / Avoid direct sunlight
7890/W	Warm white	3000K	18W/m	1620lm/m	15x45°	24V DC		100cm	4	Requires 24V DC driver / Avoid direct sunlight

The Dark Light Profiles



7903/W | 2m Surface profile + PC opal diffuser | Aluminium



5
YEAR

30

**DARK
LIGHT**




Complete with 2 pairs
end caps & 6pcs
fixing clips.



Optional black diffuser.
Order code 030248/B.

FOR LED STRIPS

IP20	IP65
10W/m	5W/m



The Dark Light Profiles



7903R/W

7903TR/B



7903R/W | 2m Recessed profile + PC opal diffuser | Aluminium



5 YEAR 20




Complete with 2 pairs end caps & 6pcs fixing clips.



Optional black diffuser. Order code 030248/B.

24x2000mm
27mm

FOR LED STRIPS
IP20 IP65
10W/m 5W/m



7903TR/W | 2m Trimless profile + PC opal diffuser | Aluminium



5 YEAR 16




Complete with 2 pairs end caps.



Optional black diffuser. Order code 030248/B.

24x2000mm
25mm

FOR LED STRIPS
IP20 IP65
10W/m 5W/m



7903TR/B | 2m Trimless profile + PC opal diffuser | Aluminium



5 YEAR 16




Complete with 2 pairs end caps.



Optional black diffuser. Order code 030248/B.

24x2000mm
25mm

FOR LED STRIPS
IP20 IP65
10W/m 5W/m



The Black Profiles Series



7902/B/B | 2m Surface profile + PC black diffuser | Aluminium



5 YEAR 25



Complete with 2 pairs end caps
& 6pcs fixing clips.

FOR LED STRIPS

IP20
10W/m



7904/B/B | 2m Surface profile + PC black diffuser | Aluminium




5 YEAR 20



Complete with 2 pairs end caps
& 6pcs fixing clips.

FOR LED STRIPS

IP20 IP65
15W/m 5W/m



7912/B/B | 2m Surface / Suspended profile + PC black diffuser | Aluminium



5 YEAR 12



Complete with
2 pairs end caps.



Optional Trimless kit
(10pcs).
Order code 7838M.



Optional suspension
wire (1pc).
Order code 7900P.




Optional 180°
connector.
Order code 7900C.



Optional 90°
connector.
Order code 7900R.

FOR LED STRIPS

IP20 IP65
30W/m 15W/m



The Black Profiles Series



7912R/B/B

7901TR/B

7902R/B/B | 2m Recessed profile + PC black diffuser | Aluminium

5
YEAR

25




Complete with 2 pairs end caps.



FOR LED STRIPS

IP20

10W/m



7912R/B/B | 2m Recessed profile + PC black diffuser | Aluminium

5
YEAR


16

Complete with 2 pairs end caps
& 6pcs fixing clips.

FOR LED STRIPS

IP20 IP65

25W/m 10W/m



7910R/B/B | 2m Recessed profile + PC black diffuser | Aluminium

5
YEAR


12

Complete with 2 pairs end caps
& 4pcs fixing clips with screws.

FOR LED STRIPS

IP20 IP65

30W/m 15W/m



7901TR/B | 2m Trimless profile + PC black diffuser | Aluminium

5
YEAR


2

Complete with 2 pairs
end caps.

FOR LED STRIPS

IP20 IP65

10W/m 5W/m



7904TR/B | 2m Trimless profile + PC black diffuser | Aluminium

5
YEAR


2

Complete with 2 pairs
end caps.

FOR LED STRIPS

IP20 IP65

15W/m 5W/m



Surface Slim Profiles



7900/W

7900 | 2m Profile for heat dissipation | Aluminium

Suitable for LED Strips 12mm.



5
YEAR



7900/AL

FOR LED STRIPS

IP20 IP65
30W/m 15W/m



7901/W

7901 | 2m Surface profile + PC opal diffuser | Aluminium



5
YEAR



7901/B




7901/AL



Complete with 2 pairs
end caps & 6pcs metal
fixing clips.

FOR LED STRIPS

IP20
10W/m



7902/W

7902 | 2m Surface profile + PC opal diffuser | Aluminium



5
YEAR



7902/B



7902/AL



Complete with 2 pairs
end caps & 6pcs
fixing clips.

FOR LED STRIPS

IP20
10W/m





Surface Profiles



7904/W

7904 | 2m Surface profile + PC opal diffuser | Aluminium



5
YEAR



7904/B




7904/AL



Complete with 2 pairs
end caps & 6pcs
fixing clips.

FOR LED STRIPS
IP20 IP65
15W/m 5W/m



7905/W

7905 | 2m Surface profile + PC opal diffuser | Aluminium



5
YEAR



7905/B




7905/AL



Complete with 2 pairs
end caps & 6pcs
fixing clips.

FOR LED STRIPS
IP20 IP65
15W/m 8W/m







Surface/Suspended Wide Profiles


External driver





7912/W | 2m Surface/Suspended profile + PC opal diffuser | Aluminium

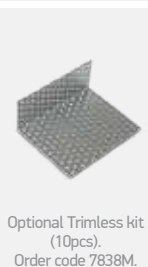


FOR LED STRIPS
IP20 IP65
30W/m 15W/m





7912/B | 2m Surface/Suspended profile + PC opal diffuser | Aluminium

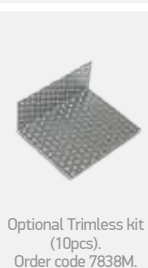


FOR LED STRIPS
IP20 IP65
30W/m 15W/m




7912/AL | 2m Surface / Suspended profile + PC opal diffuser | Aluminium




FOR LED STRIPS
IP20 IP65
30W/m 15W/m



7912A/AL | 2m Surface / Suspended profile + PC opal diffuser | Aluminium

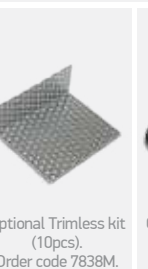

FOR LED STRIPS
IP20 IP65
40W/m 20W/m



Surface/Suspended Wide Profiles Internal driver



7910/W | 2m Surface / Suspended profile + PC opal diffuser | Aluminium


Use drivers on pages 695, 696 & 697



5 YEAR
8




Complete with
2 pairs end caps.



Optional Trimless kit
(10pcs).
Order code 7838M.



Optional suspension
wire (1pc).
Order code 7900P.




Optional 180°
connector.
Order code 7900C.



Optional 90°
connector.
Order code 7900R.

FOR LED STRIPS

IP20	IP65
30W/m	15W/m



7910/B | 2m Surface / Suspended profile + PC opal diffuser | Aluminium

Use drivers on pages 695, 696 & 697



5 YEAR
8



Complete with
2 pairs end caps.



Optional Trimless kit
(10pcs).
Order code 7838M.



Optional suspension
wire (1pc).
Order code 7900P.




Optional 180°
connector.
Order code 7900C.



Optional 90°
connector.
Order code 7900R.

FOR LED STRIPS

IP20	IP65
30W/m	15W/m



7910/AL | 2m Surface / Suspended profile + PC opal diffuser | Aluminium

Use drivers on pages 695, 696 & 697



5 YEAR
8



Complete with
2 pairs end caps.



Optional Trimless kit
(10pcs).
Order code 7838M.



Optional suspension
wire (1pc).
Order code 7900P.




Optional 180°
connector.
Order code 7900C.



Optional 90°
connector.
Order code 7900R.

FOR LED STRIPS

IP20	IP65
30W/m	15W/m





Surface/Suspended Wide Profiles

Internal driver



7910A/W | 2m Surface / Suspended profile + PC opal diffuser | Aluminium

Use drivers on pages 695, 696 & 697



Complete with
2 pairs end caps.



Optional suspension
wire (1pc).
Order code 7900P.




Optional 180°
connector.
Order code 7900C.



Optional 90°
connector.
Order code 7900R.

FOR LED STRIPS
IP20 IP65
50W/m 20W/m



7910A/B | 2m Surface / Suspended profile + PC opal diffuser | Aluminium

Use drivers on pages 695, 696 & 697



Complete with
2 pairs end caps.



Optional suspension
wire (1pc).
Order code 7900P.




Optional 180°
connector.
Order code 7900C.



Optional 90°
connector.
Order code 7900R.

FOR LED STRIPS
IP20 IP65
50W/m 20W/m



7910A/AL | 2m Surface / Suspended profile + PC opal diffuser | Aluminium

Use drivers on pages 695, 696 & 697



Complete with
2 pairs end caps.



Optional suspension
wire (1pc).
Order code 7900P.




Optional 180°
connector.
Order code 7900C.



Optional 90°
connector.
Order code 7900R.

FOR LED STRIPS
IP20 IP65
50W/m 20W/m



050122/W White



IP20



050122/B
Black



050122/G
Grey




Side Light Surface & Suspended Profiles



7906/AL | 2m Surface profile + PMMA opal square diffuser | Aluminium





FOR LED STRIPS
IP20 IP65
15W/m 8W/m




7906D/AL | 2m Surface / Suspended profile + PC opal diffuser | Aluminium

Use drivers on pages 695, 696 & 697

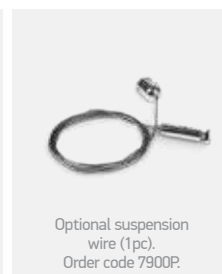

FOR LED STRIPS
IP20 IP65
50W/m 20W/m



7902R/W

7902R/B

Recessed Profiles

7901R/W | 2m Recessed profile + PC opal diffuser | Aluminium



5 YEAR 30

new



Complete with 2 pairs end caps.




8x2000mm



13mm

FOR LED STRIPS

IP20
10W/m



7901R/AL | 2m Recessed profile + PC opal diffuser | Aluminium



5 YEAR 30



Complete with 2 pairs end caps.




8x2000mm



13mm

FOR LED STRIPS

IP20
10W/m



7902R/W | 2m Recessed profile + PC opal diffuser | Aluminium



5 YEAR 2



Complete with 2 pairs end caps.




18x2000mm



10mm

FOR LED STRIPS

IP20
10W/m



7902R/B | 2m Recessed profile + PC opal diffuser | Aluminium



5 YEAR 2



Complete with 2 pairs end caps.




18x2000mm



10mm

FOR LED STRIPS

IP20
10W/m



7902R/AL | 2m Recessed profile + PC opal diffuser | Aluminium



5 YEAR 2



Complete with 2 pairs end caps.



18x2000mm



10mm

FOR LED STRIPS

IP20
10W/m



Recessed Profiles

7904R/W | 2m Recessed profile + PC opal diffuser | Aluminium



5
YEAR



Complete with 2 pairs end caps.




18x2000mm



16mm

FOR LED STRIPS

IP20	IP65
15W/m	5W/m



7904R/B | 2m Recessed profile + PC opal diffuser | Aluminium



5
YEAR



Complete with 2 pairs end caps.




18x2000mm



16mm

FOR LED STRIPS

IP20	IP65
15W/m	5W/m



7904R/AL | 2m Recessed profile + PC opal diffuser | Aluminium



5
YEAR



Complete with 2 pairs end caps.



18x2000mm



16mm

FOR LED STRIPS

IP20	IP65
15W/m	5W/m



Recessed Profiles




7912R/AL


7910R/AL




7906R/W | 2m Recessed profile + PC opal diffuser | Aluminium




FOR LED STRIPS	
IP20	IP65
15W/m	5W/m




7906R/AL | 2m Recessed profile + PC opal diffuser | Aluminium




FOR LED STRIPS	
IP20	IP65
15W/m	5W/m




7912R/W | 2m Recessed profile + PC opal diffuser | Aluminium

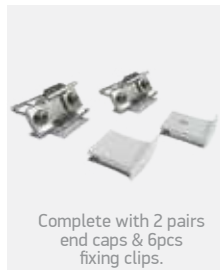


FOR LED STRIPS	
IP20	IP65
30W/m	15W/m



7912R/B | 2m Recessed profile + PC opal diffuser | Aluminium

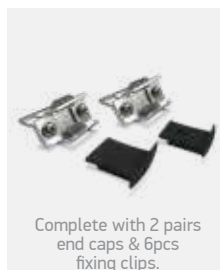


FOR LED STRIPS	
IP20	IP65
30W/m	15W/m



7912R/AL | 2m Recessed profile + PC opal diffuser | Aluminium



FOR LED STRIPS	
IP20	IP65
30W/m	15W/m



Recessed Profiles




7910R/W | 2m Recessed profile + PC opal diffuser | Aluminium



Complete with 2 pairs
end caps & 4pcs
fixing clips with screws.



FOR LED STRIPS
IP20 **IP65**
30W/m 15W/m




7910R/B | 2m Recessed profile + PC opal diffuser | Aluminium



Complete with 2 pairs
end caps & 4pcs
fixing clips with screws.



FOR LED STRIPS
IP20 **IP65**
30W/m 15W/m




7910R/AL | 2m Recessed profile + PC opal diffuser | Aluminium



Complete with 2 pairs
end caps & 4pcs
fixing clips with screws.



FOR LED STRIPS
IP20 **IP65**
30W/m 15W/m




7910AR/AL | 2m Recessed profile + PC opal diffuser | Aluminium



Complete with 2 pairs
end caps & 4pcs
metal fixing clips.



FOR LED STRIPS
IP20 **IP65**
50W/m 20W/m




Trimless Recessed Profiles



7900TR/AL | 2m Trimless profile + PC opal diffuser | Aluminium




FOR LED STRIPS
IP20
10W/m



7901TR/AL | 2m Trimless profile + PC opal diffuser | Aluminium




FOR LED STRIPS
IP20 | IP65
15W/m | 5W/m




7904TR/AL | 2m Trimless profile + PC opal diffuser | Aluminium




FOR LED STRIPS
IP20 | IP65
15W/m | 5W/m



7906TR/AL | 2m Trimless profile + PC opal diffuser | Aluminium

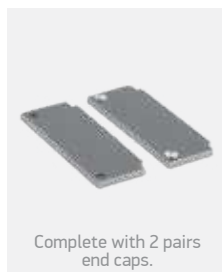

FOR LED STRIPS
IP20 | IP65
20W/m | 10W/m





Trimless Edge Recessed Profile



7909TR/AL | 2m Trimless profile + PC opal diffuser | Aluminium




5
YEAR



Complete with 2 pairs
end caps.



FOR LED STRIPS
IP20 | **IP65**
20W/m | 10W/m




Triangular Profiles



7908A/AL | 2m Triangle profile + PC opal diffuser | Aluminium




FOR LED STRIPS
IP20 IP65
10W/m 5W/m



7908/AL | 2m Triangle profile + PC opal diffuser | Aluminium



FOR LED STRIPS
IP20 IP65
20W/m 10W/m





Skirting Profile



7922/W | 2m Wall profile + PC opal diffuser | Aluminium

Suitable for LED Strips 8mm.



5
YEAR



Complete with 2 pairs
end caps.

FOR LED STRIPS

IP20



5W/m



Special Applications Profile



7920/B | 2m Step profile + PC opal diffuser | Aluminium



IP67 & IP68 Profiles



7918/W | 2m White profile + PMMA opal diffuser | Plastic




5 YEAR 100

IP68



FOR LED STRIPS
IP20
10W/m



7914R/AL | 2m Inground profile + 3mm PC opal diffuser | Aluminium



5 YEAR 20


IP67



23x2000mm



FOR LED STRIPS
IP20
10W/m



7915R/AL | 2m Inground profile + 3mm PC opal diffuser | Aluminium



5 YEAR 80


IP67



22x2000mm



FOR LED STRIPS
IP20
10W/m



Modules For Signs



7840 | 0,72W (3LEDs x 0,24W)

Double face adhesive.



LED
BUILT IN




IP65

offer

3
YEAR



Supplied in 10pcs chain.
Total length 1,7m.



7842 | 1,44W (4LEDs x 0,36W)

Double face adhesive.



LED
BUILT IN




IP65

offer

3
YEAR



Supplied in 10pcs chain.
Total length 1,25m.



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7840/Y	Yellow	-	0,72W	-	12V DC	III	100	Requires 12V DC driver
7842/BL	Blue	-	1,44W	-	12V DC	III	100	Requires 12V DC driver
7842/Y	Yellow	-	1,44W	-	12V DC	III	100	Requires 12V DC driver


tickets

Modules for Signs & Backlit Applications





7840A | 0,5W | 2,5W/m | SMD 2835 | Plastic

Modules for signs.



IP65

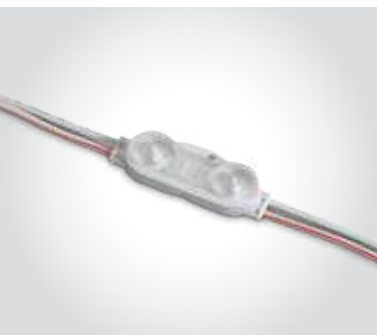



7840B | 2x0,5W | 5W/m | SMD 2835 | Plastic

Modules for signs.




IP65

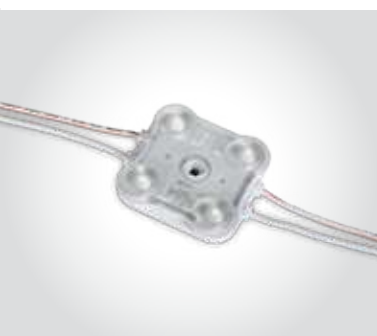


7840D | 4x0,5W | 10W/m | SMD 2835 | Plastic

Modules for signs.



IP65



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7840A/D	Daylight	6000K	0,5W	45lm	12V DC	III	50	Requires 12V DC driver
7840B/D	Daylight	6000K	1W	90lm	12V DC	III	30	Requires 12V DC driver
7840D/D	Daylight	6000K	2W	180lm	12V DC	III	20	Requires 12V DC driver

The 230V Solid LED Strip Plastic



38114B | 14W | SMD | Plastic

Can be connected in line / Connect 7 fittings maximum.



LED
BUILT IN

80
CRI





QUICK FIX

CE

2
YEAR

IP20



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
38114B/C	Cool white	4000K	14W	1540lm	230V				Complete with driver



38114B/V



38108B/V

The 230V Solid LED CCT V Strip Plastic




38104B | 4W | SMD | Plastic

Can be connected in line / Connect 25 fittings maximum.

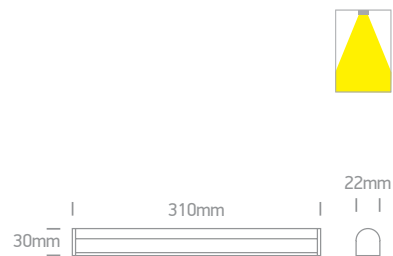


38108B | 8W | SMD | Plastic

Can be connected in line / Connect 12 fittings maximum.



38114B | 14W | SMD | Plastic

Can be connected in line / Connect 7 fittings maximum.

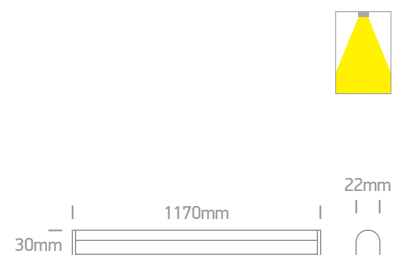


Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
38104B/V	CCT V	3000K-4000K-6000K	4W	440lm	230V		120cm	30	Complete with driver
38108B/V	CCT V	3000K-4000K-6000K	8W	880lm	230V		120cm	30	Complete with driver
38114B/V	CCT V	3000K-4000K-6000K	14W	1540lm	230V		120cm	30	Complete with driver

The LED Shelf System


Aluminium + PC




38103 | 3W | SMD 3014 | Aluminium + PC




2m maximum each line.




38105 | 5W | SMD 3014 | Aluminium + PC




2m maximum each line.



38110 | 10W | SMD 3014 | Aluminium + PC



2m maximum each line.



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38103/W	Warm white	3000K	3W	225lm	24V DC	III	100	Requires 24V DC driver / Includes mounting clips (2pcs), screws (2pcs)
38105/W	Warm white	3000K	5W	375lm	24V DC	III	50	Requires 24V DC driver / Includes mounting clips (2pcs), screws (2pcs)
38110/W	Warm white	3000K	10W	750lm	24V DC	III	25	Requires 24V DC driver / Includes mounting clips (3pcs), screws (3pcs)

The LED Shelf System Accessories



38102A | Touch ON/OFF and dimmer | Max. 60W | 24V DC




IP20



Touch ON/OFF



Hold to DIM




38102B | Wave hand | Door ON/OFF | Max. 60W | 24V DC




IP20



Lights OFF



Lights ON



38102C | PIR Sensor | Max. 60W | 24V DC


Adjustable 1min / 5min.



IP20




Move hand to switch ON/OFF the lights.



38101A | Connector for 38103, 38105 & 38110




IP20



38101B | Corner for 38103, 38105 & 38110



IP20




38101C | Power supply cable connector for 38103, 38105 & 38110



38101D | 8 - Way connection box | 24V DC



IP20




The 230V IP65 Range



7850 | 6W/m | SMD 2835 | 60LEDs/m | PVC

Cut every 1m.



IP65



Supplied in 100m roll.



11mm



7850C Connector



7850P
230V Power supply
for 100m



7850F Fixing clip



7850L Corner connector



7850E End cap




7860R
Shrinking sleeve



7860 | 9W/m | SMD 5730 | 60LEDs/m | PVC

Cut every 1m.



IP65



Supplied in 50m roll.



14mm



7860C Connector



7860P
230V Power supply
for 50m



7860F Fixing clip



7860L Corner connector



7860E End cap



7860R
Shrinking sleeve

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7850/W	Warm white	3000K	6W/m	440lm/m	230V		100m roll	Requires 7850P power supply / Avoid direct sunlight
7860/D	Daylight	6000K	9W/m	750lm/m	230V		50m roll	Requires 7860P power supply / Avoid direct sunlight
7860/C	Cool white	4000K	9W/m	750lm/m	230V		50m roll	Requires 7860P power supply / Avoid direct sunlight
7860/W	Warm white	3000K	9W/m	750lm/m	230V		50m roll	Requires 7860P power supply / Avoid direct sunlight




The 230V IP65 Range



7862 | 13W/m | SMD 5730 | 120LEDs/m | PVC

Cut every 1m.



IP65



18mm



7862C Connector



7862P
230V Power supply
for 30m



7862F Fixing clip



7862L Corner connector



7862E End cap

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Box	Notes
7862/C	Cool white	4000K	13W/m	1050lm/m	230V		30m roll	Requires 7862P power supply / Avoid direct sunlight
7862/W	Warm white	3000K	13W/m	1000lm/m	230V		30m roll	Requires 7862P power supply / Avoid direct sunlight

230V Neon Flex Lightline



7864 | 9W/m | SMD 2835 | 120LEDs/m | PVC

Supplied in 50m roll / Cut every 1m.




IP65




8mm

12mm

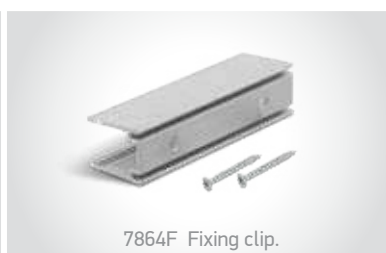

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7864/C	Cool white	4000K	9W/m	270lm/m	230V		50m roll	Requires 7864P power supply / Avoid direct sunlight
7864/W	Warm white	3000K	9W/m	270lm/m	230V		50m roll	Requires 7864P power supply / Avoid direct sunlight

230V COB Flex Lightline

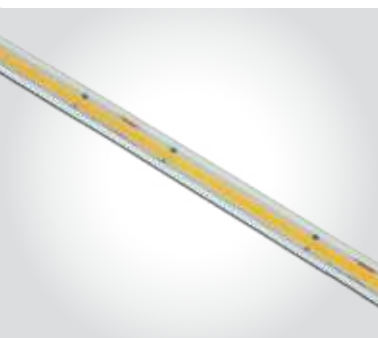

7872 | 12W/m | COB | 480LEDs/m | Silicone

3M double face adhesive.



IP66



Supplied in 50m roll.



Cut every 10cm
(48-LED segment)



7872C
Connector for 7872.



7872P
Power supply cable for 7872 / 50m.



7872E
End cap for 7872.

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7872/C	Cool white	4000K	12W/m	840lm/m	140°	230V		100cm	50m roll	Supplied with power supply EU plug / Avoid direct sunlight
7872/W	Warm white	3000K	12W/m	800lm/m	140°	230V		100cm	50m roll	Supplied with power supply EU plug / Avoid direct sunlight



Neon Flex Lightlines



7901AATR/W | 2m Bendable trimless profile | Aluminium | Suitable for 7841A





new

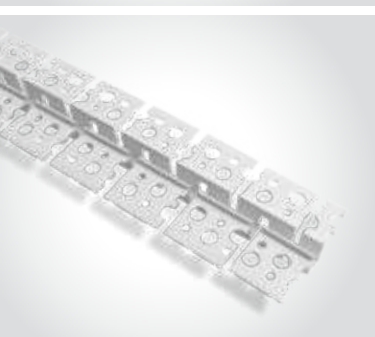

7901ATR/W | 2m Bendable trimless profile | Aluminium | Suitable for 7841




new

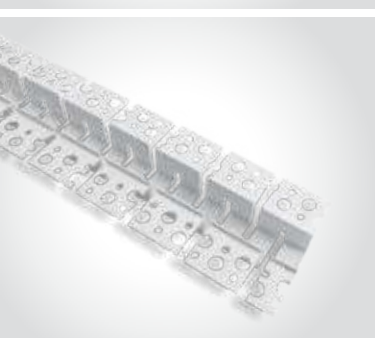

7901BATR/W | 2m Bendable trimless profile | Aluminium | Suitable for 7841B



new



7901A/W | **7901A/AL** | 2m Surface profile | Aluminium | Suitable for 7841 LED Strip




new




7901A/AL




Complete with 2 pairs end caps & 6pcs metal fixing clips.



Neon Flex Lightlines

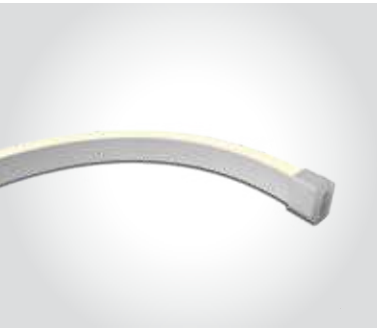


7841A | 10W/m | SMD 2835 | 180LEDs/m | Silicone




IP66



Supplied in 5m roll.



Fixing clips.
Order code 7841AF.



7841 | 14,4W/m | SMD 2835 | 140LEDs/m | Silicone




IP66



Supplied in 5m roll.



Fixing clips.
Order code 7841F.




7841B | 12W/m | SMD 2835 | 140LEDs/m | Silicone




IP66



Supplied in 5m roll.



Fixing clips.
Order code 7841BF.



7811 | 10W/m | SMD 2216 | 192 LEDs | Silicone




IP67



Supplied in 5m roll.



7811F Fixing clip
7811E End cap



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7841A/C	Cool white	4000K	10W/m	280lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7841A/W	Warm white	3000K	10W/m	280lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7841/C	Cool white	4000K	14,4W/m	360lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7841/W	Warm white	3000K	14,4W/m	320lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7841B/C	Cool white	4000K	12W/m	600lm/m	24V DC	III	10	Requires 24V DC driver / Avoid direct sunlight
7841B/W	Warm white	3000K	12W/m	550lm/m	24V DC	III	10	Requires 24V DC driver / Avoid direct sunlight
7811/W	Warm white	3000K	10W/m	550lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight

Decorative Light Tubes



7868 | 3,4W/m | LED | 30LEDs/m | Festive lighting | PVC

Connect maximum 100m / Cut every 1m.



LED
BUILT IN

CE

2
YEAR

IP65



Supplied in 50m roll.



13mm



7868P
230V Power supply for 50m.



7868F Fixing clip.



7868E End cap.

Order Code	Light Colour	CCT (K)	Watts	Input	Class		Notes
7868/D	Daylight	6000K	3,4W/m	230V		50m roll	Complete with 7868P power supply

Decorative Light Stars



7866 | 7W | LED | 100LEDs | Festive lighting | PVC

Connect maximum 100m.



LED
BUILT IN

CE

2
YEAR



IP54



7866F | 7W | LED | 100LEDs | Flashing lights | Festive lighting | PVC

Connect maximum 100m.



LED
BUILT IN

CE

2
YEAR



IP54



Order Code	Light Colour	CCT (K)	Watts	Input	Class		Notes
7866/BL	Blue	-	7W	230V	□	10	Complete with power supply
7866F/D	Daylight	6000K	7W	230V	□	10	Complete with power supply
7866F/BL	Blue	-	7W	230V	□	10	Complete with power supply