




Tracks & Magnetic

Pages 275-330

09

Square Track Surface

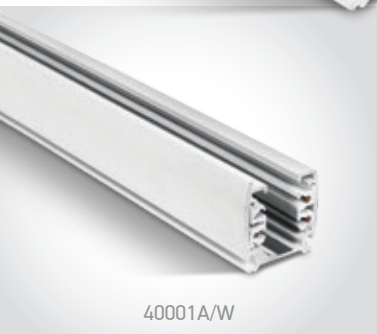


40001A/W

40001A | 16A | 1m Square track | 3-phase | Aluminium



40001A/B




40002A/W

40002A | 16A | 2m Square track | 3-phase | Aluminium



40002A/B



40003A/W


40003A | 16A | 3m Square track | 3-phase | Aluminium



40003A/B



40003A/G



40002C/W

40002C | 2m Plastic cover for square tracks



40002C/B




40002A/B + 40002C/B



Order Code	Colour	Input	Ampere	Class		Notes
40001A/W	White	100-240V	16A		10	-
40001A/B	Black	100-240V	16A		10	-
40002A/W	White	100-240V	16A		10	-
40002A/B	Black	100-240V	16A		10	-
40003A/W	White	100-240V	16A		10	-
40003A/B	Black	100-240V	16A		10	-
40003A/G	Grey	100-240V	16A		10	-

Square Track Accessories

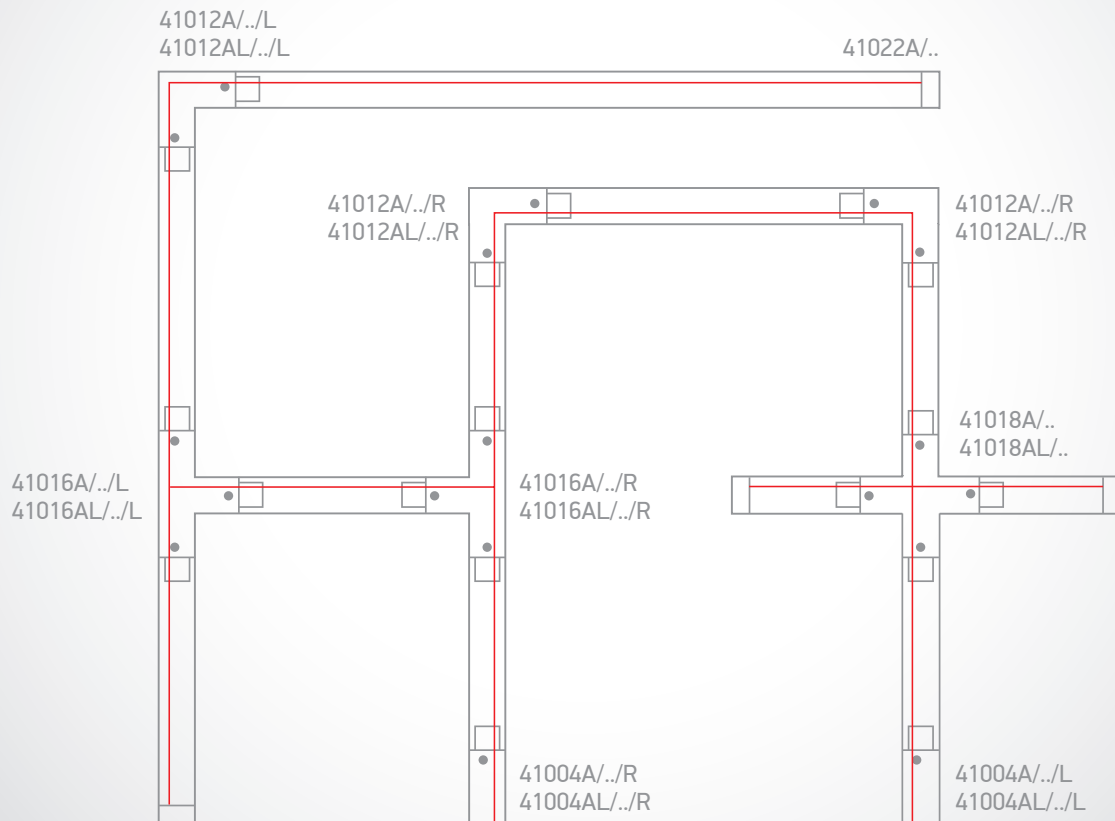

*Diagram as viewed from below (looking toward the ceiling).

41026R/W | Adjustable wire 2m for square track | Metal



new




41026R/B | Adjustable wire 2m for square track | Metal



new



41032 | Connector for suspending square track



41026R/W

41026R/B

41032/W

41032/B

Square Track Accessories



41020/G

41020 | Heavy items mechanical adaptor for square track | Die cast



41004A/W/L

41004A | 16A | Live end for square track | Plastic



41004A/B/L



41004A/G/L



41010A/W


41010A | 16A | Live connector for square track | Plastic



41010A/B



41010A/G



41008A/W

41008A | 16A | Connector for square track | Plastic



41008A/B



41008A/G




Order Code	Colour	Direction	Input	Ampere	Class		Notes
41004A/W/L	White	Left	100-240V	16A		50	-
41004A/W/R	White	Right	100-240V	16A		50	-
41004A/B/L	Black	Left	100-240V	16A		50	-
41004A/B/R	Black	Right	100-240V	16A		50	-
41004A/G/L	Grey	Left	100-240V	16A		50	-
41004A/G/R	Grey	Right	100-240V	16A		50	-
41010A/W	White	-	100-240V	16A		50	-
41010A/B	Black	-	100-240V	16A		50	-
41010A/G	Grey	-	100-240V	16A		50	-
41008A/W	White	-	100-240V	16A		100	-
41008A/B	Black	-	100-240V	16A		100	-
41008A/G	Grey	-	100-240V	16A		100	-


Square Track Accessories




41012A | 16A | Corner for square track | Plastic



41016A | 16A | T connector for square track | Plastic




41018A | 16A | X Connector for square track | Plastic




41024A | 16A | Flexible connector for square track | Plastic



41022A | End cap for square track | Plastic



Order Code	Colour	Direction	Input	Ampere	Class		Notes
41012A/W/L	White	Left	100-240V	16A	⊕	25	-
41012A/W/R	White	Right	100-240V	16A	⊖	25	-
41012A/B/L	Black	Left	100-240V	16A	⊕	25	-
41012A/B/R	Black	Right	100-240V	16A	⊖	25	-
41012A/G/L	Grey	Left	100-240V	16A	⊕	25	-
41012A/G/R	Grey	Right	100-240V	16A	⊖	25	-
41016A/W/L	White	Left	100-240V	16A	⊕	25	-
41016A/W/R	White	Right	100-240V	16A	⊖	25	-
41016A/B/L	Black	Left	100-240V	16A	⊕	25	-
41016A/B/R	Black	Right	100-240V	16A	⊖	25	-
41016A/G/R	Grey	Right	100-240V	16A	⊖	25	-
41018A/W	White	-	100-240V	16A	⊕	10	-
41018A/B	Black	-	100-240V	16A	⊕	10	-
41024A/W	White	-	100-240V	16A	⊕	10	-
41024A/B	Black	-	100-240V	16A	⊕	10	-
41024A/G	Grey	-	100-240V	16A	⊕	10	-

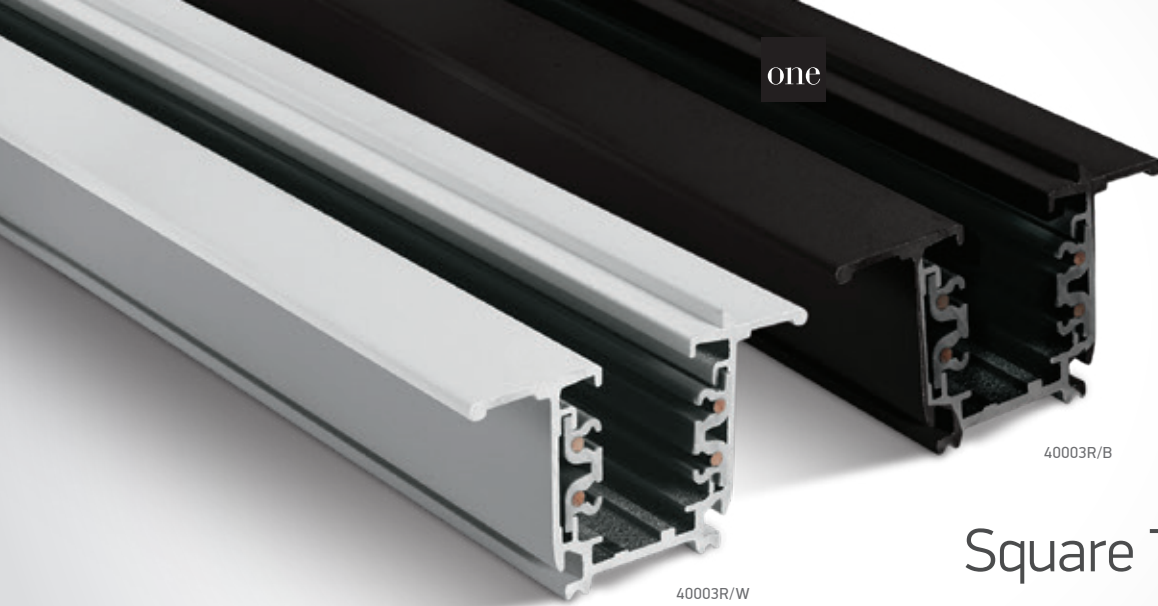

40003R/B

40003R/W

Square Track Recessed




40003R/W

40003R | 16A | 3m Recessed track | 3-phase | Aluminium

Use accessories on pages 277 & 278.



Recessed fixing clip.
Order code 41034R.




40003R/B

40003R | 16A | 3m Recessed track | 3-phase | Aluminium

Use accessories on pages 277 & 278.




Recessed fixing clip.
Order code 41034R.



41004B/W


41004B/W | Cover for 41004A



41008B/W | Cover for 41010A




41008B/W



41012B/W


41012B/W | Cover for corner 41012A



41016B/W | Cover for T connector 41016A



41016B/W



Order Code	Colour	Input	Ampere	Class				Notes
40003R/W	White	100-240V	16A		40x3000mm	35mm	6	-
40003R/B	Black	100-240V	16A		40x3000mm	35mm	6	-



41002/G

41002A/W

Track Adaptors & Accessories



41002/W


41002 | 16A | Track adaptor | Plastic



offer



41002/G




41002A/W

41002A | 6A | Track adaptor | Plastic



41002A/B




41030/W

41030 | 6A | Surface mount base for track lights | Plastic




IP20



41030/B



41030/G





Order Code	Colour	Input	Ampere	Class		Notes
41002/W	White	100-240V	16A	⌚	150	-
41002/G	Grey	100-240V	16A	⌚	150	-
41002A/W	White	100-240V	6A	⌚	50	-
41002A/B	Black	100-240V	6A	⌚	50	-
41030/W	White	100-240V	6A	⌚	40	-
41030/B	Black	100-240V	6A	⌚	40	-
41030/G	Grey	100-240V	6A	⌚	40	-



Square DALI Track

White



40001AL/W


40001AL | 16A | 1m Square DALI track | 3-phase + DALI | Aluminium


new


40002AL | 16A | 2m Square DALI track | 3-phase + DALI | Aluminium


new


40003AL | 16A | 3m Square DALI track | 3-phase + DALI | Aluminium


new


41026R/W | Adjustable wire 2m for square track | Metal


new


41032 | Connector for suspending square track


Order Code	Colour	Input	Ampere	Class		Notes
40001AL/W	White	100-240V	16A		10	-
40002AL/W	White	100-240V	16A		10	-
40003AL/W	White	100-240V	16A		10	-

Square DALI Track

Black



40001AL/B



40001AL/B

40001AL | 16A | 1m Square DALI track | 3-phase + DALI | Aluminium




new



40002AL/B

40002AL | 16A | 2m Square DALI track | 3-phase + DALI | Aluminium




new



40003AL/B

40003AL | 16A | 3m Square DALI track | 3-phase + DALI | Aluminium



new




41026R/B

41026R/B | Adjustable wire 2m for square track | Metal


new




41032/B

41032 | Connector for suspending square track


Order Code	Colour	Input	Ampere	Class		Notes
40001AL/B	Black	100-240V	16A		10	-
40002AL/B	Black	100-240V	16A		10	-
40003AL/B	Black	100-240V	16A		10	-

Square Track Accessories

DALI

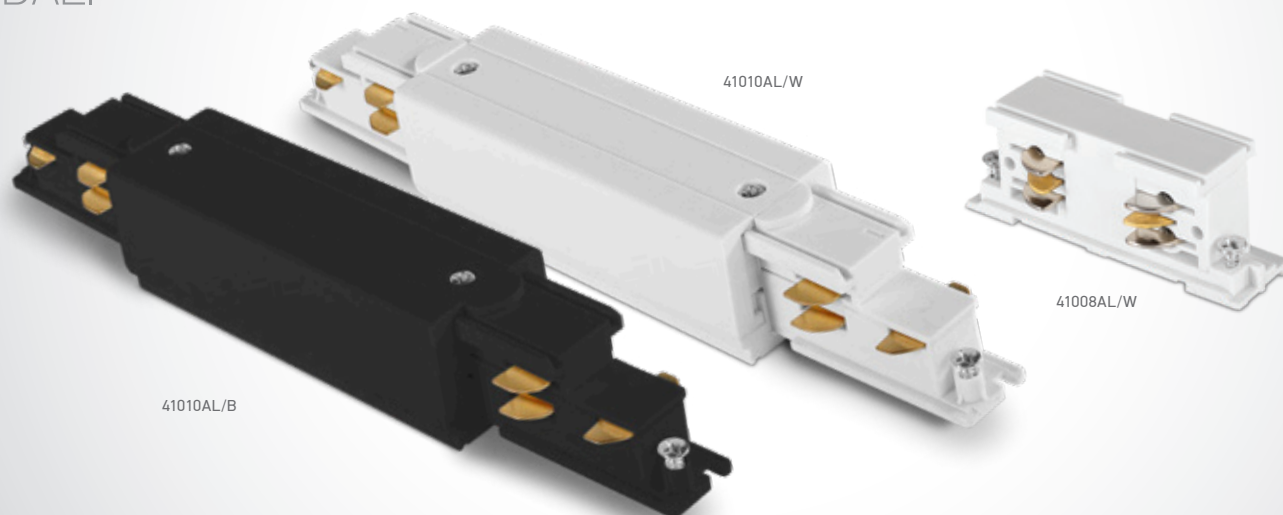


41004AL | 16A | Live end for square DALI track | DALI | Plastic



new



41004AL/B/..




41010AL | 16A | Live connector for square DALI track | DALI | Plastic



new



41010AL/B





41008AL | 16A | Connector for square DALI track | DALI | Plastic



new




41008AL/B




Order Code	Colour	Direction	Input	Ampere	Class		Notes
41004AL/W/L	White	Left	100-240V	16A	⊕	50	For DALI track
41004AL/W/R	White	Right	100-240V	16A	⊕	50	For DALI track
41004AL/B/L	Black	Left	100-240V	16A	⊕	50	For DALI track
41004AL/B/R	Black	Right	100-240V	16A	⊕	50	For DALI track
41010AL/W	White	-	100-240V	16A	⊕	50	For DALI track
41010AL/B	Black	-	100-240V	16A	⊕	50	For DALI track
41008AL/W	White	-	100-240V	16A	⊕	100	For DALI track
41008AL/B	Black	-	100-240V	16A	⊕	100	For DALI track

Square Track Accessories

DALI

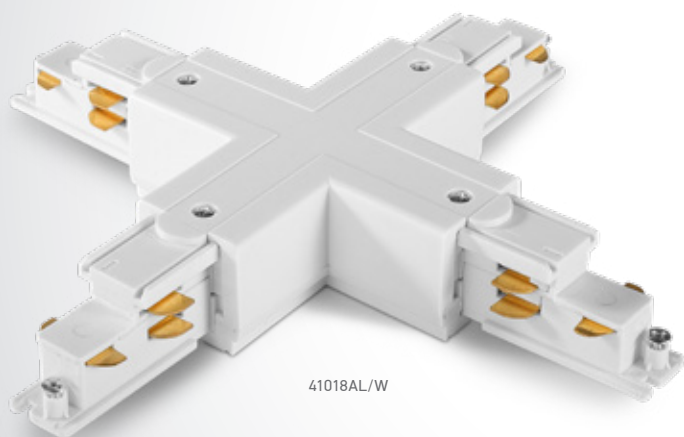

41018AL/W

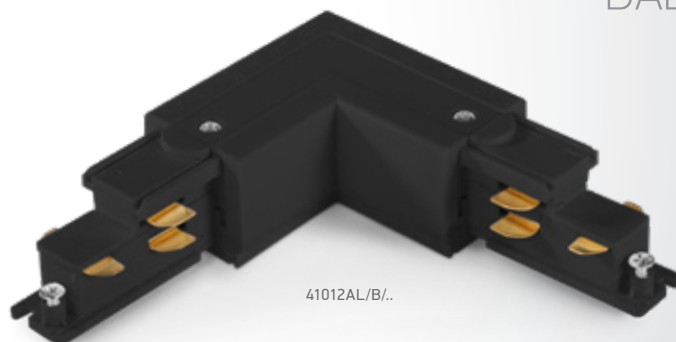

41012AL/B/..



41012AL/W/..



41012AL | 16A | Corner for square DALI track | DALI | Plastic




new



41012AL/B/..



new



41016AL/W/..



41016AL | 16A | T-connector for square DALI track | DALI | Plastic




new



41016AL/B/..



new



41018AL/W



41018AL | 16A | X-Connector for square DALI track | DALI | Plastic



new



41018AL/B



new

Order Code	Colour	Direction	Input	Ampere	Class		Notes
41012AL/W/L	White	Left	100-240V	16A		25	For DALI track
41012AL/W/R	White	Right	100-240V	16A		25	For DALI track
41012AL/B/L	Black	Left	100-240V	16A		25	For DALI track
41012AL/B/R	Black	Right	100-240V	16A		25	For DALI track
41016AL/W/L	White	Left	100-240V	16A		25	For DALI track
41016AL/W/R	White	Right	100-240V	16A		25	For DALI track
41016AL/B/L	Black	Left	100-240V	16A		25	For DALI track
41016AL/B/R	Black	Right	100-240V	16A		25	For DALI track
41018AL/W	White	-	100-240V	16A		10	For DALI track
41018AL/B	Black	-	100-240V	16A		10	For DALI track






Magnetic Surface Profiles

MINI




42001A | 42002A | 48V | Magnetic profile | ON/OFF / DALI | Aluminium



Max 10m/driver | Max 400W/circuit.



42012AA | Corner for 42001A & 42002A | Aluminium



42012BA | Corner wall to wall (IN) for 42001A & 42002A | Aluminium



Order Code	Colour	Length	Input	Class		Notes
42001A/B	Black	1m	48V	III	1	-
42001A/W	White	1m	48V	III	1	-
42002A/B	Black	2m	48V	III	1	-
42002A/W	White	2m	48V	III	1	-

Magnetic Surface Profiles

MIDI

42001B/B




42001B/B

42001B | 42002B | 48V | Magnetic profile | ON/OFF / DALI | Aluminium

Max 10m/driver | Max 400W/circuit.

Optional suspension kit.
Order code 42026A/B.Complete with
2pcs end caps.


Complete with cover.




42001B/W

42001B | 42002B | 48V | Magnetic profile | ON/OFF / DALI | Aluminium

Max 10m/driver | Max 400W/circuit.

Optional suspension kit.
Order code 42026A/W.Complete with
2pcs end caps.

Complete with cover.



42012AB/B

42012AB | Corner for 42001B & 42002B | Aluminium



42012AB/W

Complete with 2pcs
mechanical connectors.

42012BB/B

42012BB | Corner wall to wall (IN) for 42001B & 42002B | Aluminium


42012BB/W

Complete with 2pcs
mechanical connectors.

Order Code	Colour	Length	Input	Class		Notes
42001B/B	Black	1m	48V	III	1	-
42001B/W	White	1m	48V	III	1	-
42002B/B	Black	2m	48V	III	1	-
42002B/W	White	2m	48V	III	1	-

Magnetic Surface Profiles MAXI




one



42001/B

42001 | 42002 | 42003 | 48V | Magnetic profile | ON/OFF / DALI | Aluminium

Max 10m/driver | Max 400W/circuit





42001/W

42001 | 42002 | 42003 | 48V | Magnetic profile | ON/OFF / DALI | Aluminium

Max 10m/driver | Max 400W/circuit





new





42012A/B

42012A | Corner for 42001, 42002 & 42003 | Aluminium




42012B/B

42012B | Corner wall to wall (IN) for 42001, 42002 & 42003 | Aluminium



42012C/B

42012C | Corner wall to wall (OUT) for 42001, 42002 & 42003 | Aluminium




Order Code	Colour	Length	Input	Class		Notes
42001/W	White	1m	48V	III	1	-
42001/B	Black	1m	48V	III	1	-
42002/W	White	2m	48V	III	1	-
42002/B	Black	2m	48V	III	1	-
42003/W	White	3m	48V	III	1	-
42003/B	Black	3m	48V	III	1	-



Magnetic Surface Profiles MAXI

42012D | T-connector with live connector for 42001, 42002 & 42003 | Aluminium



42012D/B



new

new




42012D/W



Complete with wiring.

MAXI
✓



42012E | X-connector with live connector for 42001, 42002 & 42003 | Aluminium



42012E/B



new

new




42012E/W



Complete with wiring.

MAXI
✓






Magnetic Recessed Profiles




MIDI





42001RB | 42002RB | 48V | Recessed magnetic profile | ON/OFF / DALI | Aluminium | Max 10m/driver | Max 400W/circuit.



42012ARB | Recessed corner for 42001RB & 42002RB | Aluminium



42012BRB | Recessed corner wall to wall (IN) for 42001RB & 42002RB | Aluminium



Order Code	Colour	Length	Input	Class				Notes
42001RB/W	White	1m	48V	III	35x1000mm	100mm	1	-
42001RB/B	Black	1m	48V	III	35x1000mm	100mm	1	-
42002RB/W	White	2m	48V	III	35x2000mm	100mm	1	-
42002RB/B	Black	2m	48V	III	35x2000mm	100mm	1	-

Magnetic Recessed Profiles

MAXI



42001R/B

42002R/W



42001R/B



42012AR/B



42012BR/B

42001R | 42002R | 48V | Recessed magnetic profile | ON/OFF / DALI | Aluminium | Max 10m/driver | Max 400W/circuit.




42001R/W



Complete with
fixing clips,
1pc mechanical &
2pcs side connectors.




Complete with
2pcs end caps.




Complete with cover.





42012AR | Recessed corner for 42001R & 42002R | Aluminium




42012AR/W



Complete with
2pcs mechanical
connectors & 4pcs
side connectors.





42012BR | Recessed corner wall to wall (IN) for 42001R & 42002R | Aluminium



42012BR/W



Complete with
2pcs mechanical
connectors & 4pcs
side connectors.



Order Code	Colour	Length	Input	Class				Notes
42001R/W	White	1m	48V	III	42x1000mm	120mm	1	-
42001R/B	Black	1m	48V	III	42x1000mm	120mm	1	-
42002R/W	White	2m	48V	III	42x2000mm	120mm	1	-
42002R/B	Black	2m	48V	III	42x2000mm	120mm	1	-



42001ATR/B

42001ATR/W

Magnetic Trimless Profiles

MINI



42001ATR/W

42001ATR | 42002ATR | 48V | Trimless recessed | ON/OFF / DALI | Aluminium

Max 10m/driver | Max 400W/circuit.




new



Complete with 2 pcs mechanical connectors.



Complete with 2 pcs end caps.



42001ATR/B

42001ATR | 42002ATR | 48V | Trimless recessed | ON/OFF / DALI | Aluminium

Max 10m/driver | Max 400W/circuit.




new



Complete with 2 pcs mechanical connectors.



Complete with 2 pcs end caps.



42012AATR/B



42012AATR | Trimless recessed corner for 42001ATR & 42002ATR | Aluminium



new



42012AATR/W



Order Code	Colour	Length	Input	Class				Notes
42001ATR/W	White	1m	48V	III	30x1000mm	60mm	1	-
42001ATR/B	Black	1m	48V	III	30x1000mm	60mm	1	-
42002ATR/W	White	2m	48V	III	30x2000mm	60mm	1	-
42002ATR/B	Black	2m	48V	III	30x2000mm	60mm	1	-

Magnetic Trimless Profiles

MAXI






42001TR | 42002TR | 48V | Trimless recessed | ON/OFF / DALI | Aluminium

Max 10m/driver | Max 400W/circuit.






new





42001TR | 42002TR | 48V | Trimless recessed | ON/OFF / DALI | Aluminium

Max 10m/driver | Max 400W/circuit.




42012ATR | Trimless recessed corner for 42001TR & 42002TR | Aluminium

Can not pass through cutout hole.



42012BTR | Trimless recessed corner wall to wall (IN) for 42001TR & 42002TR | Aluminium

Can not pass through cutout hole.



Order Code	Colour	Length	Input	Class	⌵	⏏	📦	Notes
42001TR/W	White	1m	48V	III	42x1000mm	120mm	1	-
42001TR/B	Black	1m	48V	III	42x2000mm	120mm	1	-
42002TR/W	White	2m	48V	III	42x1000mm	120mm	1	-
42002TR/B	Black	2m	48V	III	42x2000mm	120mm	1	-

Magnetic Profiles Accessories



42032A

42032A | Mechanical connector for MINI & MIDI



42032

42032 | Mechanical connector for 42001, 42002 & 42003



42022A/B

42022A | End caps for 42001A & 42002A



42022A/W




42022B/B

42022B | End caps for 42001B, 42002B, 42001RB & 42002RB




42022B/W




42022/B

42022 | End caps for 42001, 42002, 42003, 42001R & 42002R



42022/W




Magnetic Profiles Accessories




42004A/B

42004A | 48V | Power supply cable | ON/OFF / DALI | Plastic



42004C/B

42004C | 48V | Live connector/corner | ON/OFF / DALI | Plastic



42004B/B

42004B | 48V | Live connector | ON/OFF / DALI | Plastic



new



42026/B

42026 | Suspension kit 3m for 42001, 42002 & 42003



42026/W



42006BX/B

42006BX | 250W | 48V DC | Driver for magnetic profiles



42006BX/W




Order Code	Input	Power	Output	Class	Dimmable		Notes
42006BX/W	230V	250W	48V DC		NO	20	-
42006BX/B	230V	250W	48V DC		NO	20	-

Magnetic Linear Lights


CCT V





42100AA | 8W | Linear light | Aluminium + PC





42100BA | 16W | Linear light | Aluminium + PC



42100A | 15W | Linear light | Aluminium + PC



42100B | 25W | Linear light | Aluminium + PC



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	Box	Notes
42100AA/W/V	White	CCT V	3000K-3500K-4000K	8W	640lm	120°	48V	III	50	-
42100AA/B/V	Black	CCT V	3000K-3500K-4000K	8W	640lm	120°	48V	III	50	-
42100BA/W/V	White	CCT V	3000K-3500K-4000K	16W	1280lm	120°	48V	III	40	-
42100BA/B/V	Black	CCT V	3000K-3500K-4000K	16W	1280lm	120°	48V	III	40	-
42100A/B/W	Black	Warm white	3000K	15W	1200lm	120°	48V	III	40	-
42100A/W/V	White	CCT V	3000K-3500K-4000K	15W	1200lm	120°	48V	III	40	-
42100A/B/V	Black	CCT V	3000K-3500K-4000K	15W	1200lm	120°	48V	III	40	-
42100B/B/W	Black	Warm white	3000K	25W	2000lm	120°	48V	III	20	-
42100B/W/V	White	CCT V	3000K-3500K-4000K	25W	2000lm	120°	48V	III	20	-
42100B/B/V	Black	CCT V	3000K-3500K-4000K	25W	2000lm	120°	48V	III	20	-

Magnetic Linear Lights

DALI



42100BL/W/V

42100AL/W/V



42100AAL/B/V

42100AAL | 8W | Linear light | CCT DALI Tunable | Aluminium + PC



new

IP20

new



42100AAL/W/V



42100BAL/B/V

42100BAL | 16W | Linear light | CCT DALI Tunable | Aluminium + PC




new

IP20

new



42100BAL/W/V



42100AL/B/V

42100AL | 15W | Linear light | CCT DALI Tunable | Aluminium + PC




new

IP20

new



42100AL/W/V



42100BL/B/V

42100BL | 25W | Linear light | CCT DALI Tunable | Aluminium + PC




new

IP20

new



42100BL/W/V




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42100AAL/W/V	White	CCT V	3000K-4000K tunable	8W	640lm	120°	48V	III	50	-
42100AAL/B/V	Black	CCT V	3000K-4000K tunable	8W	640lm	120°	48V	III	50	-
42100BAL/W/V	White	CCT V	3000K-4000K tunable	16W	1280lm	120°	48V	III	40	-
42100BAL/B/V	Black	CCT V	3000K-4000K tunable	16W	1280lm	120°	48V	III	40	-
42100AL/W/V	White	CCT V	3000K-4000K tunable	15W	1200lm	120°	48V	III	40	-
42100AL/B/W	Black	Warm white	3000K	15W	1200lm	120°	48V	III	40	-
42100AL/B/V	Black	CCT V	3000K-4000K tunable	15W	1200lm	120°	48V	III	40	-
42100BL/W/V	White	CCT V	3000K-4000K tunable	25W	2000lm	120°	48V	III	20	-
42100BL/B/V	Black	CCT V	3000K-4000K tunable	25W	2000lm	120°	48V	III	20	-




Magnetic Linear Corners




42100EA | 16W | Corner light | Aluminium + PC



42100E | 25W | Corner light | Aluminium + PC

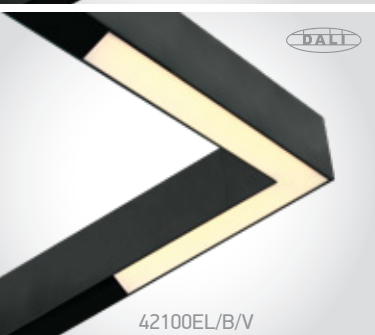

42100EL | 25W | Corner light | CCT DALI Tunable | Aluminium + PC



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42100EA/B/V	Black	CCT V	3000K-3500K-4000K	16W	1280lm	120°	48V	III	10	-
42100E/B/W	Black	Warm white	3000K	25W	2000lm	120°	48V	III	12	-
42100E/B/V	Black	CCT V	3000K-3500K-4000K	25W	2000lm	120°	48V	III	12	-
42100EL/B/W	Black	Warm white	3000K	25W	2000lm	120°	48V	III	12	-
42100EL/B/V	Black	CCT V	3000K-4000K tunable	25W	2000lm	120°	48V	III	12	-

Magnetic Linear Lights



42102A/B/V

42102A | 12W | Linear spots | Aluminium



new
IP20



42102AL/B/V

42102AL | 12W | Linear spots | CCT DALI Tunable | Aluminium



new
IP20





42102B/B/V

42102B | 22W | Linear spots | Aluminium



new
IP20




42102BL/B/V

42102BL | 22W | Linear spots | CCT DALI Tunable | Aluminium



new
IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42102A/B/W	Black	Warm white	3000K	12W	960lm	38°	48V	III	40	-
42102A/B/V	Black	CCT V	3000K-3500K-4000K	12W	960lm	38°	48V	III	40	-
42102AL/B/V	Black	CCT V	3000K-4000K tunable	12W	960lm	38°	48V	III	40	-
42102B/B/V	Black	CCT V	3000K-3500K-4000K	22W	1760lm	38°	48V	III	30	-
42102BL/B/W	Black	Warm white	3000K	22W	1760lm	38°	48V	III	30	-
42102BL/B/V	Black	CCT V	3000K-4000K tunable	22W	1760lm	38°	48V	III	30	-


Magnetic Adjustable Linear Spots



42106A | 12W | Linear spots | Adjustable | Aluminium





new
IP20




42106AL | 12W | Linear spots | CCT DALI Tunable | Adjustable | Aluminium





new
IP20




42106B | 22W | Linear spots | Adjustable | Aluminium




new
IP20



42106BL | 22W | Linear spots | CCT DALI Tunable | Adjustable | Aluminium



new
IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42106A/W/V	White	CCT V	3000K-3500K-4000K	12W	960lm	38°	48V	III	30	-
42106A/B/W	Black	Warm white	3000K	12W	960lm	38°	48V	III	30	-
42106A/B/V	Black	CCT V	3000K-3500K-4000K	12W	960lm	38°	48V	III	30	-
42106AL/W/V	White	CCT V	3000K-4000K tunable	12W	960lm	38°	48V	III	30	-
42106AL/B/V	Black	CCT V	3000K-4000K tunable	12W	960lm	38°	48V	III	30	-
42106B/W/V	White	CCT V	3000K-3500K-4000K	22W	1760lm	38°	48V	III	20	-
42106B/B/W	Black	Warm white	3000K	22W	1760lm	38°	48V	III	20	-
42106B/B/V	Black	CCT V	3000K-3500K-4000K	22W	1760lm	38°	48V	III	20	-
42106BL/W/V	White	CCT V	3000K-4000K tunable	22W	1760lm	38°	48V	III	20	-
42106BL/B/W	Black	Warm white	3000K	22W	1760lm	38°	48V	III	20	-
42106BL/B/V	Black	CCT V	3000K-4000K tunable	22W	1760lm	38°	48V	III	20	-

Magnetic Linear Spots



42112AA | 12W | Linear spots | Aluminium



new
IP20



42112AAL | 12W | Linear spots | CCT DALI Tunable | Aluminium




new
IP20



42112BA | 18W | Linear spots | Aluminium



new
IP20



42112BAL | 18W | Linear spots | CCT DALI Tunable | Aluminium



new
IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42112AA/W/V	White	CCT V	3000K-3500K-4000K	12W	960lm	50°	48V	III	50	-
42112AA/B/V	Black	CCT V	3000K-3500K-4000K	12W	960lm	50°	48V	III	50	-
42112AAL/W/V	White	CCT V	3000K-4000K tunable	12W	960lm	50°	48V	III	50	-
42112AAL/B/V	Black	CCT V	3000K-4000K tunable	12W	960lm	50°	48V	III	50	-
42112BA/W/V	White	CCT V	3000K-3500K-4000K	18W	1440lm	50°	48V	III	40	-
42112BA/B/V	Black	CCT V	3000K-3500K-4000K	18W	1440lm	50°	48V	III	40	-
42112BAL/W/V	White	CCT V	3000K-4000K tunable	18W	1440lm	50°	48V	III	40	-
42112BAL/B/V	Black	CCT V	3000K-4000K tunable	18W	1440lm	50°	48V	III	40	-

Magnetic Linear Lights






42120B/B/W

42120B | 12W | SMD | Linear light | Assymetric | Aluminium + PC



IP20



42104B/B/V



42104B | 12W | Linear spots | Aluminium



new

DARK LIGHT

IP20



42104BL/B/V


42104BL | 12W | Linear spots | CCT DALI Tunable | Aluminium



new

DARK LIGHT

IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42120B/B/W	Black	Warm white	3000K	12W	960lm	90°	48V	III	40	-
42104B/B/W	Black	Warm white	3000K	12W	840lm	36°	48V	III	40	-
42104B/B/V	Black	CCT V	3000K-3500K-4000K	12W	840lm	36°	48V	III	40	-
42104BL/B/V	Black	CCT V	3000K-4000K tunable	12W	840lm	36°	48V	III	40	-


Magnetic Adjustable Linear Spots

42124BA/W/V

42124AA | 10W | Linear spots | Adjustable | Aluminium




new
IP20




42124AA/W/V

42124AA | 10W | Linear spots | Adjustable | Aluminium




new
IP20




42124AA/B/V

42124BA | 20W | Linear spots | Adjustable | Aluminium




new
IP20




42124BA/W/V

42124BA | 20W | Linear spots | Adjustable | Aluminium



new
IP20



42124BA/B/V

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42124AA/W/V	White	CCT V	3000K-3500K-4000K	10W	800lm	38°	48V		30	-
42124AA/B/V	Black	CCT V	3000K-3500K-4000K	10W	800lm	38°	48V		30	-
42124BA/W/V	White	CCT V	3000K-3500K-4000K	20W	1600lm	38°	48V		20	-
42124BA/B/W	Black	Warm white	3000K	20W	1600lm	38°	48V		20	-
42124BA/B/V	Black	CCT V	3000K-3500K-4000K	20W	1600lm	38°	48V		20	-

Magnetic Linear Tubes



42128A/B/W

42128A | 2x2W | SMD | Linear spots | Aluminium



IP20



42128B/B/V

42128B | 3x2W | SMD | Linear spots | Aluminium



new

IP20



42128C/B/W

42128C | 5x2W | SMD | Linear spots | Aluminium



IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	Box	Notes
42128A/B/W	Black	Warm white	3000K	2x2W	200lm	36°	48V	III	50	-
42128B/B/V	Black	CCT V	3000K-3500K-4000K	3x2W	300lm	36°	48V	III	50	-
42128C/B/W	Black	Warm white	3000K	5x2W	500lm	36°	48V	III	30	-




Magnetic Ball Lights



42134 | 7W | COB | Aluminium




IP20



42134A | 2x7W | COB | Aluminium



IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42134/B/W	Black	Warm white	3000K	7W	560lm	36°	48V	III	30	-
42134A/B/W	Black	Warm white	3000K	2x7W	1120lm	36°	48V	III	30	-

42122A/W/V

42108/W/V


Magnetic Spots

CCT V



42122A | 5W | Aluminium

new
IP20



42122A/W/V



42122A/B/V

42108 | 6W | Aluminium

new
IP20


42108/W/V




42108/B/V

42108A | 2x6W | Aluminium

new
IP20



42108A/W/V



42108A/B/V

42118 | 26W | COB | Aluminium


IP20



42118/B/W

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	Box	Notes
42122A/B/W	Black	Warm white	3000K	3W	240lm	38°	48V	III	30	-
42122A/W/V	White	CCT V	3000K-3500K-4000K	5W	400lm	38°	48V	III	30	-
42122A/B/V	Black	CCT V	3000K-3500K-4000K	5W	400lm	38°	48V	III	30	-
42108/W/V	White	CCT V	3000K-3500K-4000K	6W	480lm	38°	48V	III	30	-
42108/B/V	Black	CCT V	3000K-3500K-4000K	6W	480lm	38°	48V	III	30	-
42108A/W/V	White	CCT V	3000K-3500K-4000K	2x6W	2x480lm	38°	48V	III	20	-
42108A/B/V	Black	CCT V	3000K-3500K-4000K	2x6W	2x480lm	38°	48V	III	20	-
42118/B/W	Black	Warm white	3000K	26W	2080lm	50°	48V	III	20	-

Magnetic Spots

DALI




42122AL/B/V

42122AL | 5W | CCT DALI Tunable | Aluminium



42122AL/W/V




42108L/B/V

42108L | 6W | CCT DALI Tunable | Aluminium



42108L/W/V




42108AL/B/V

42108AL | 2x6W | CCT DALI Tunable | Aluminium




42108AL/W/V



42118L/B/W

42118L | 26W | COB | DALI | Aluminium



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	Box	Notes
42122AL/W/V	White	CCT V	3000K-4000K tunable	5W	400lm	38°	48V	III	30	-
42122AL/B/V	Black	CCT V	3000K-4000K tunable	5W	400lm	38°	48V	III	30	-
42108L/W/V	White	CCT V	3000K-4000K tunable	6W	480lm	38°	48V	III	30	-
42108L/B/V	Black	CCT V	3000K-4000K tunable	6W	480lm	38°	48V	III	30	-
42108AL/W/V	White	CCT V	3000K-4000K tunable	2x6W	2x480lm	38°	48V	III	20	-
42108AL/B/V	Black	CCT V	3000K-4000K tunable	2x6W	2x480lm	38°	48V	III	20	-
42118L/B/W	Black	Warm white	3000K	26W	2080lm	50°	48V	III	20	-

Magnetic Spots


CCT V

42140L/W/W


42138/W/V

42138 | 7W | Honeycomb | Aluminium

new
IP20

new



42138/W/V




42138/B/V

42110 | 8W | Honeycomb | Aluminium


new
DARK LIGHT
IP20

new


42110/W/V




42110/B/V

42144 | 10W | Honeycomb | Aluminium

new
DARK LIGHT
IP20

new


42144/W/V



42144/B/V


42140 | 7W | Adjustable beam 10°-38° | Aluminium

Zoomable.


new
IP20

new


42140/W/W



42140/B/W

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42138/W/V	White	CCT V	3000K-3500K-4000K	7W	560lm	38°	48V	III	30	-
42138/B/V	Black	CCT V	3000K-3500K-4000K	7W	560lm	38°	48V	III	30	-
42110/W/V	White	CCT V	3000K-3500K-4000K	8W	640lm	15°	48V	III	30	-
42110/B/W	Black	Warm white	3000K	8W	640lm	15°	48V	III	30	-
42110/B/V	Black	CCT V	3000K-3500K-4000K	8W	640lm	15°	48V	III	30	-
42144/W/V	White	CCT V	3000K-3500K-4000K	10W	700lm	38°	48V	III	20	-
42144/B/V	Black	CCT V	3000K-3500K-4000K	10W	700lm	38°	48V	III	20	-
42140/W/W	White	Warm white	3000K	7W	490lm	10°-38°	48V	III	30	-
42140/B/W	Black	Warm white	3000K	7W	490lm	10°-38°	48V	III	30	-

Magnetic Spots


DALI



42138L/B/V



42138L | 7W | CCT DALI Tunable | Honeycomb | Aluminium




new

IP20



42138L/W/V



42110L/B/V



42110L | 8W | CCT DALI Tunable | Honeycomb | Aluminium




new

IP20




42110L/W/V



42144L/B/V



42144L | 10W | CCT DALI Tunable | Honeycomb | Aluminium




new

IP20



42144L/W/V



42140L/B/W



42140L | 7W | DALI | Adjustable beam 10°- 38° | Aluminium




new

IP20



42140L/W/W



Zoomable.

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42138L/W/V	White	CCT V	3000K-4000K tunable	7W	560lm	38°	48V	III	30	-
42138L/B/V	Black	CCT V	3000K-4000K tunable	7W	560lm	38°	48V	III	30	-
42110L/W/V	White	CCT V	3000K-4000K tunable	8W	640lm	15°	48V	III	30	-
42110L/B/V	Black	CCT V	3000K-4000K tunable	8W	640lm	15°	48V	III	30	-
42144L/W/V	White	CCT V	3000K-4000K tunable	10W	700lm	38°	48V	III	20	-
42144L/B/V	Black	CCT V	3000K-4000K tunable	10W	700lm	38°	48V	III	20	-
42140L/W/W	White	Warm white	3000K	7W	490lm	10°-38°	48V	III	30	-
42140L/B/W	Black	Warm white	3000K	7W	490lm	10°-38°	48V	III	30	-

42114C/W/V

42114B/W/V

Magnetic Spots

CCT V




42114A/B/V

42114A | 12W | Aluminium



42114A/W/V




42114B/B/V

42114B | 24W | Aluminium



42114B/W/V




42114C/B/V

42114C | 30W | Aluminium




42114C/W/V



42116C/B/W

42116C | 15W | COB | Aluminium




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42114A/W/V	White	CCT V	3000K-3500K-4000K	12W	960lm	38°	48V	III	24	-
42114A/B/V	Black	CCT V	3000K-3500K-4000K	12W	960lm	38°	48V	III	24	-
42114B/W/V	White	CCT V	3000K-3500K-4000K	24W	1920lm	38°	48V	III	16	-
42114B/B/V	Black	CCT V	3000K-3500K-4000K	24W	1920lm	38°	48V	III	16	-
42114C/W/V	White	CCT V	3000K-3500K-4000K	30W	2400lm	38°	48V	III	16	-
42114C/B/W	Black	Warm white	3000K	30W	2400lm	38°	48V	III	16	-
42114C/B/V	Black	CCT V	3000K-3500K-4000K	30W	2400lm	38°	48V	III	16	-
42116C/B/W	Black	Warm white	3000K	15W	1200lm	38°	48V	III	16	-

Magnetic Spots


DALI





42114AL | 12W | CCT DALI Tunable | Aluminium



42114BL | 24W | CCT DALI Tunable | Aluminium



42114CL | 30W | CCT DALI Tunable | Aluminium



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	Box	Notes
42114AL/W/V	White	CCT V	3000K-4000K tunable	12W	960lm	38°	48V	III	24	-
42114AL/B/V	Black	CCT V	3000K-4000K tunable	12W	960lm	38°	48V	III	24	-
42114BL/W/V	White	CCT V	3000K-4000K tunable	24W	1920lm	38°	48V	III	16	-
42114BL/B/V	Black	Warm white	3000K	24W	1920lm	38°	48V	III	16	-
42114BL/B/W	Black	Warm white	3000K	24W	1920lm	38°	48V	III	16	-
42114CL/W/V	White	CCT V	3000K-4000K tunable	30W	2400lm	38°	48V	III	16	-
42114CL/B/V	Black	CCT V	3000K-4000K tunable	30W	2400lm	38°	48V	III	16	-

Magnetic Pendants



42142/B/V

42132/B/W

42130B/B/V




42130A/B/V

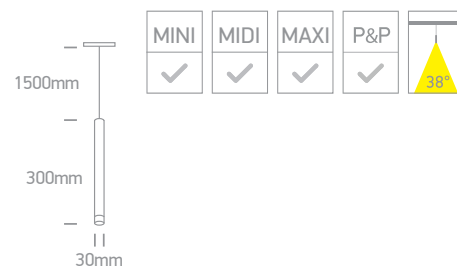42130A | 5W | Aluminium


42130B/B/V

42130B | 9W | Aluminium




42130B/W/V

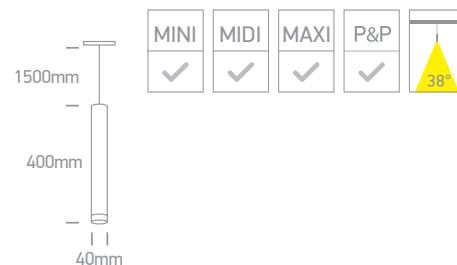

42132/B/W



42132 | 7W | COB | Aluminium

With removable tube.

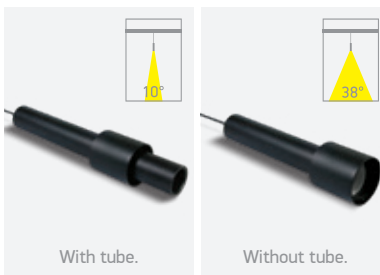

With tube.

Without tube.

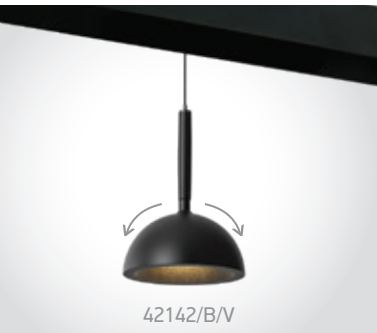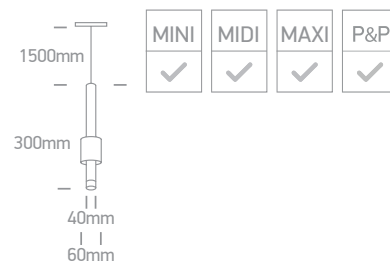

42142/B/V

42142 | 10W | Aluminium


42142/W/V




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	Box	Notes
42130A/B/V	Black	CCT V	3000K-3500K-4000K	5W	350lm	38°	48V	III	30	-
42130B/W/V	White	CCT V	3000K-3500K-4000K	9W	630lm	38°	48V	III	30	-
42130B/B/W	Black	Warm white	3000K	9W	630lm	38°	48V	III	30	-
42130B/B/V	Black	CCT V	3000K-3500K-4000K	9W	630lm	38°	48V	III	30	-
42132/B/W	Black	Warm white	3000K	7W	490lm	10° / 38°	48V	III	30	-
42142/W/V	White	CCT V	3000K-3500K-4000K	10W	700lm	110°	48V	III	20	-
42142/B/V	Black	CCT V	3000K-3500K-4000K	10W	700lm	110°	48V	III	20	-

Magnetic Pendants




DALI




42130BL | 9W | CCT DALI Tunable | Aluminium

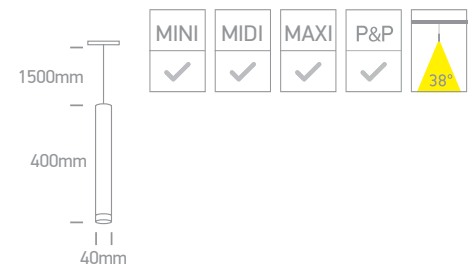

42132L | 7W | COB | DALI | Aluminium

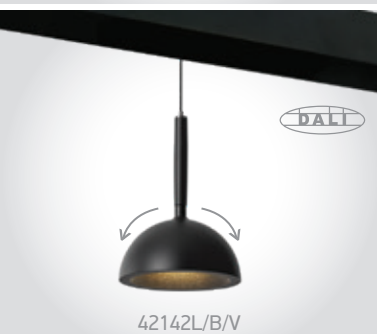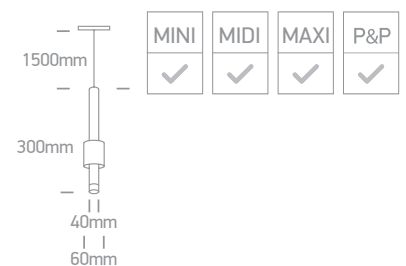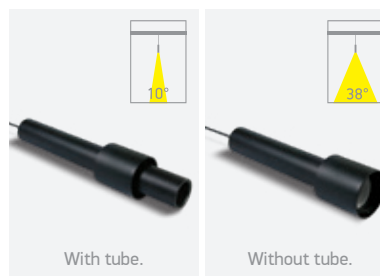

42142L | 10W | CCT DALI Tunable | Aluminium

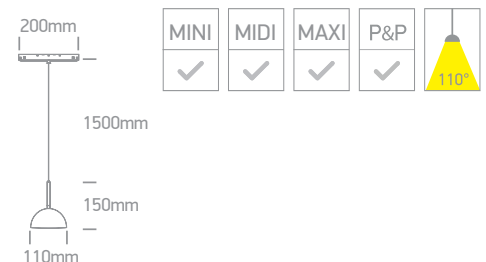



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42130BL/W/V	White	CCT V	3000K-4000K tunable	9W	630lm	38°	48V	III	30	-
42130BL/B/V	Black	CCT V	3000K-4000K tunable	9W	630lm	38°	48V	III	30	-
42132L/B/W	Black	Warm white	3000K	7W	490lm	10° / 38°	48V	III	30	-
42142L/W/V	White	CCT V	3000K-4000K tunable	10W	700lm	110°	48V	III	20	-
42142L/B/V	Black	CCT V	3000K-4000K tunable	10W	700lm	110°	48V	III	20	-

Magnetic Pendants





42126AA/B/W

42126AA | 5W | LED | Aluminium

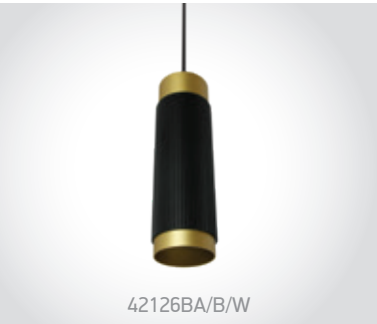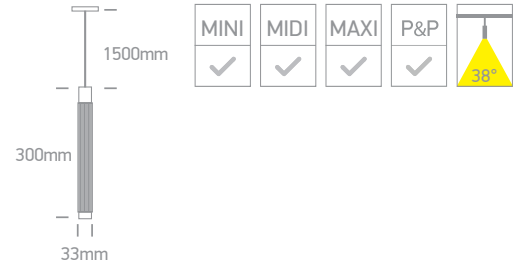


42126BA/B/W

42126BA | 12W | LED | Aluminium

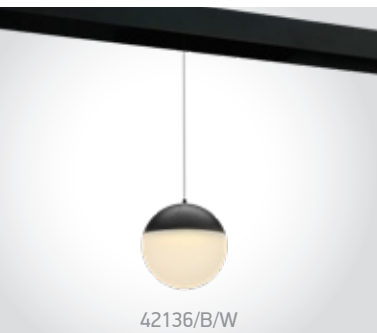
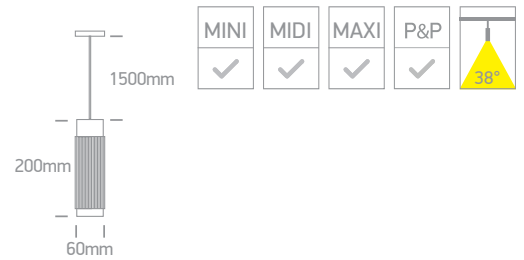


42136/B/W

42136 | 10W | SMD | Aluminium + acrylic



42136/BBS/W

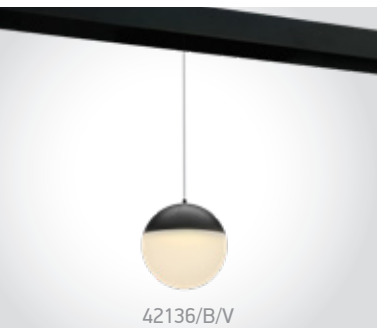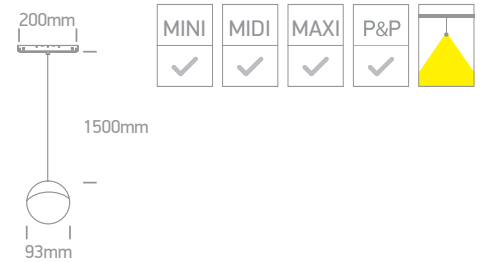


42136/B/V

42136 | 10W | Aluminium + acrylic



42136/W/V

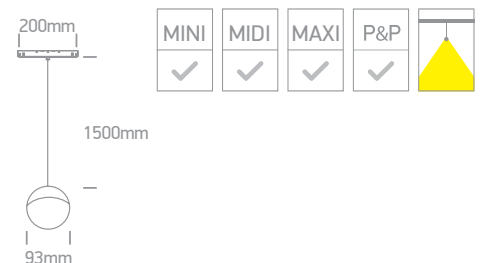

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	Box	Notes
42126AA/B/W	Black/Brass	Warm white	3000K	5W	350lm	38°	48V	III	50	-
42126BA/B/W	Black/Brass	Warm white	3000K	12W	840lm	38°	48V	III	25	-
42136/B/W	Black	Warm white	3000K	10W	700lm	-	48V	III	15	-
42136/BBS/W	Brushed brass	Warm white	3000K	10W	700lm	-	48V	III	15	-
42136/W/V	White	CCT V	3000K-3500K-4000K	10W	700lm	-	48V	III	15	-
42136/B/V	Black	CCT V	3000K-3500K-4000K	10W	700lm	-	48V	III	15	-



Magnetic Plafo CCT V



42146/B/V


42146 | 30W | Aluminium



new
IP20




42146/W/V



42146L/B/V


42146L | 30W | CCT DALI Tunable | Aluminium



new
IP20



42146L/W/V



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
42146/W/V	White	CCT V	3000K-3500K-4000K	30W	2700lm	48V	III	1	-
42146/B/V	Black	CCT V	3000K-3500K-4000K	30W	2700lm	48V	III	1	-
42146L/W/V	White	CCT V	3000K-4000K tunable	30W	2700lm	48V	III	1	-
42146L/B/V	Black	CCT V	3000K-4000K tunable	30W	2700lm	48V	III	1	-


one



Plug & Play



Watch video

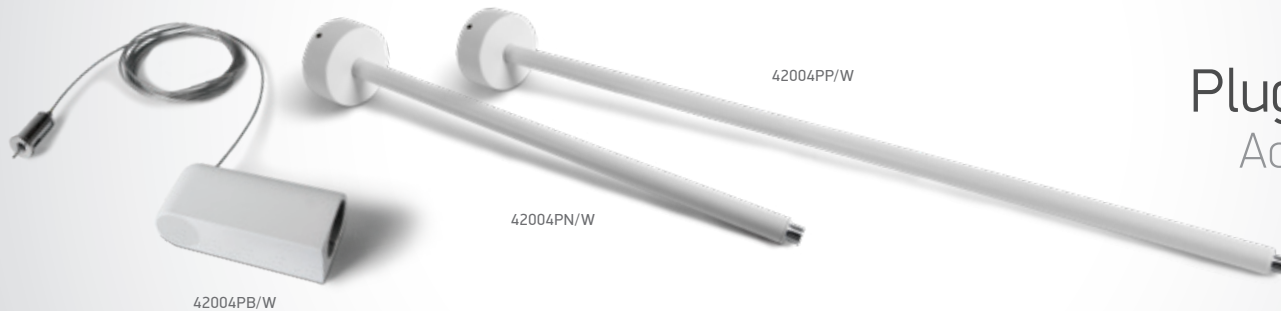

Plug & Play Accessories



42004PM/B

42004PM | Surface rod 7cm | Aluminium | Compatible with all surface accessories

Plug & Play.




new
IP20

new



42004PM/W

P&P
✓



42004PN/B

42004PN | Surface rod 33cm | Aluminium | Compatible with all surface accessories

Plug & Play.




new
IP20

new



42004PN/W

P&P
✓



42004PP/B

42004PP | Surface rod 63cm | Aluminium | Compatible with all surface accessories

Plug & Play.




new
IP20

new



42004PP/W

P&P
✓



42004PA/B

42004PA | Power supply cable + end cap | ON/OFF / DALI | Aluminium

Plug & Play.




new
IP20

new



42004PA/W

P&P
✓



42004PB/B

42004PB | Suspended/surface end cap | Aluminium

Plug & Play.




new
IP20

new



42004PB/W

P&P
✓



one

Plug & Play Accessories

42004PG/W

42004PL/W

42004PD | Surface base with power supply & end cap | ON/OFF / DALI | Aluminium


Plug & Play.



new
IP20

new

P&P



42004PD/B

42004PD/W

42004PR | Recessed base with power supply cable & end cap | ON/OFF / DALI | Aluminium


Plug & Play.



new
IP20

new

P&P

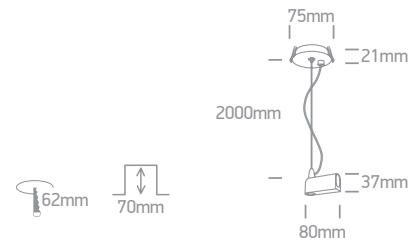

42004PR/B

42004PR/W

42004PC | Driver base + end cap | ON/OFF / DALI | Aluminium


Suitable for driver 89240XL / Driver must be ordered separately.



new
IP20

new

P&P



42004PC/B

42004PC/W

42004PE | Power supply cable adjustable corner | ON/OFF / DALI | Aluminium


Plug & Play.



new
IP20

new

P&P



42004PE/B

42004PE/W

42004PG | Suspended/surface adjustable corner | Aluminium


Plug & Play.



new
IP20

new

P&P



42004PG/B

42004PG/W



Plug & Play Accessories

42004PF | Suspended/surface connector | Aluminium

Plug & Play.




new



42004PF/W

P&P



new

IP20



42004PF/B

42004PH | Suspended/surface ceiling to wall corner | Aluminium

Plug & Play.




new



42004PH/W

P&P



new

IP20



42004PH/B

42004PJ | Suspended/surface T-connector | Aluminium

Plug & Play.




new



42004PJ/W

P&P



new

IP20



42004PJ/B

42004PK | Suspended/surface Y-connector | Aluminium

Plug & Play.




new



42004PK/W

P&P



new

IP20



42004PK/B

42004PL | Suspended/surface X-connector | Aluminium

Plug & Play.




new



42004PL/W

P&P



new

IP20



42004PL/B

Magnetic Adjustable Profiles

Plug & Play



42001P | 42002P | 42003P | Magnetic profile | ON/OFF / DALI | Aluminium


Max 15m/driver | Max 250W/circuit.



new

IP20

P&P

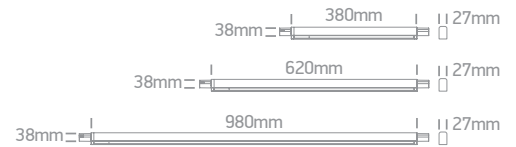

42001P | 42002P | 42003P | Magnetic profile | ON/OFF / DALI | Aluminium


Max 15m/driver | Max 250W/circuit.



new

IP20

P&P

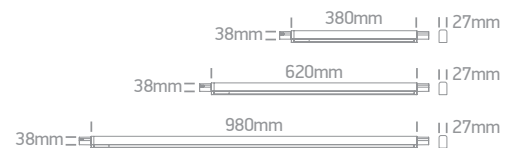


42001PA | 42002PA | 42003PA | Cover for 42001P, 42002P & 42003P

Plug & Play.



new

P&P




42001PA | 42002PA | 42003PA | Cover for 42001P, 42002P & 42003P

Plug & Play.



new

P&P

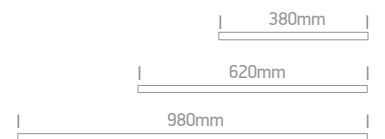

Order Code	Colour	Length	Input	Class		Notes
42001P/W	White	380mm	48V		30	Suitable for only 1pc P&P spot
42001P/B	Black	380mm	48V		30	Suitable for only 1pc P&P spot
42002P/W	White	620mm	48V		20	Suitable for only 2pcs P&P spots
42002P/B	Black	620mm	48V		20	Suitable for only 2pcs P&P spots
42003P/W	White	980mm	48V		10	Suitable for only 4pcs P&P spots
42003P/B	Black	980mm	48V		10	Suitable for only 4pcs P&P spots
42001PA/W	White	380mm	-	-	50	-
42001PA/B	Black	380mm	-	-	50	-
42002PA/W	White	620mm	-	-	50	-
42002PA/B	Black	620mm	-	-	50	-
42003PA/W	White	980mm	-	-	25	-
42003PA/B	Black	980mm	-	-	25	-

Magnetic Adjustable Linear Lights

Plug & Play / CCT V & DALI



42100PC/B/V


42100PB/W/V



42100PA/B/V

42100PA | 42100PB | 42100PC | Adjustable | Aluminium



Max 15m/driver | Max 250W/circuit.



new
IP20



42100PA/W/V

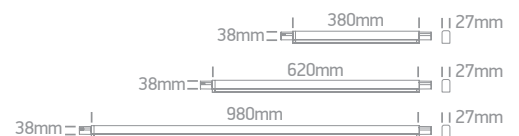

42100PAL/B/V

42100PAL | 42100PBL | 42100PCL | CCT DALI Tunable | Adjustable | Aluminium


Max 15m/driver | Max 250W/circuit.



new
IP20



42100PAL/W/V

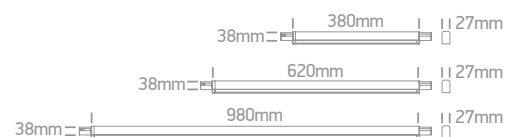

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42100PA/W/V	White	CCT V	3000K-3500K-4000K	15W	1200lm	110°	48V	III	30	380mm
42100PA/B/V	Black	CCT V	3000K-3500K-4000K	15W	1200lm	110°	48V	III	30	380mm
42100PB/W/V	White	CCT V	3000K-3500K-4000K	24W	1920lm	110°	48V	III	20	620mm
42100PB/B/V	Black	CCT V	3000K-3500K-4000K	24W	1920lm	110°	48V	III	20	620mm
42100PC/W/V	White	CCT V	3000K-3500K-4000K	32W	2560lm	110°	48V	III	10	980mm
42100PC/B/V	Black	CCT V	3000K-3500K-4000K	32W	2560lm	110°	48V	III	10	980mm
42100PAL/W/V	White	CCT V	3000K-4000K tunable	15W	1200lm	110°	48V	III	30	380mm
42100PAL/B/V	Black	CCT V	3000K-4000K tunable	15W	1200lm	110°	48V	III	30	380mm
42100PBL/W/V	White	CCT V	3000K-4000K tunable	24W	1920lm	110°	48V	III	20	620mm
42100PBL/B/V	Black	CCT V	3000K-4000K tunable	24W	1920lm	110°	48V	III	20	620mm
42100PCL/W/V	White	CCT V	3000K-4000K tunable	32W	2560lm	110°	48V	III	10	980mm
42100PCL/B/V	Black	CCT V	3000K-4000K tunable	32W	2560lm	110°	48V	III	10	980mm

Magnetic Adjustable Linear Spots

Plug & Play / CCT V



42112PBL/W/V

42112PC/B/V



42112PA/B/V



42112PA/W/V


42112PA | 42112PB | 42112PC | Adjustable | Aluminium

Max 15m/driver | Max 250W/circuit.



new

IP20

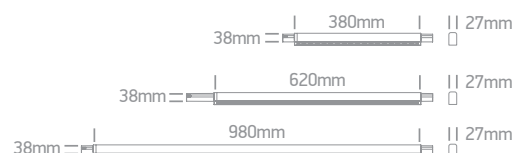


42112PA | 42112PB | 42112PC | Adjustable | Aluminium

Max 15m/driver | Max 250W/circuit.



new

IP20

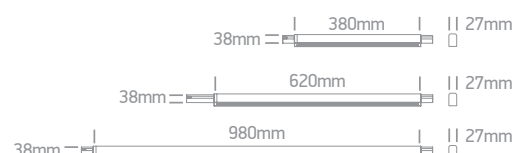

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42112PA/W/V	White	CCT V	3000K-3500K-4000K	15W	1200lm	50°	48V	III	30	380mm
42112PA/B/V	Black	CCT V	3000K-3500K-4000K	15W	1200lm	50°	48V	III	30	380mm
42112PB/W/V	White	CCT V	3000K-3500K-4000K	24W	1920lm	50°	48V	III	20	620mm
42112PB/B/V	Black	CCT V	3000K-3500K-4000K	24W	1920lm	50°	48V	III	20	620mm
42112PC/W/V	White	CCT V	3000K-3500K-4000K	32W	2560lm	50°	48V	III	10	980mm
42112PC/B/V	Black	CCT V	3000K-3500K-4000K	32W	2560lm	50°	48V	III	10	980mm



Magnetic Adjustable Linear Spots


Plug & Play / CCT V & DALI




42112PAL | 42112PBL | 42112PCL | CCT DALI Tunable | Adjustable | Aluminium | Max 15m/driver | Max 250W/circuit.




new
IP20

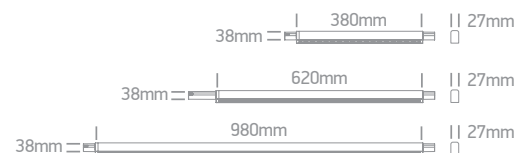

42112PAL | 42112PBL | 42112PCL | CCT DALI Tunable | Adjustable | Aluminium | Max 15m/driver | Max 250W/circuit.



new
IP20

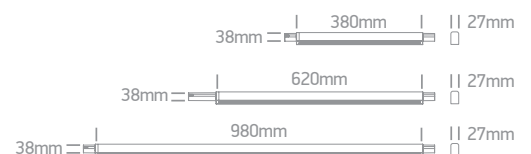

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	Box	Notes
42112PAL/W/V	White	CCT V	3000K-4000K tunable	15W	1200lm	50°	48V	III	30	380mm
42112PAL/B/V	Black	CCT V	3000K-4000K tunable	15W	1200lm	50°	48V	III	30	380mm
42112PBL/W/V	White	CCT V	3000K-4000K tunable	24W	1920lm	50°	48V	III	20	620mm
42112PBL/B/V	Black	CCT V	3000K-4000K tunable	24W	1920lm	50°	48V	III	20	620mm
42112PCL/W/V	White	CCT V	3000K-4000K tunable	32W	2560lm	50°	48V	III	10	980mm
42112PCL/B/V	Black	CCT V	3000K-4000K tunable	32W	2560lm	50°	48V	III	10	980mm

one



Watch video

The FLAT System



43001F/B

43001F | 43002F | 48V | Flat magnetic profile | ON/OFF | Aluminium

Max 15m/driver | Max 250W/circuit.



new



Optional 2m suspension kit.
43004FM/B




43006FA/B

43006FA | 90W | 48V DC | Driver for flat magnetic profile



new

IP20




43006FC/B

43006FC | 180W | 48V DC | Driver for flat magnetic profile



new

IP20



Order Code	Colour	Length	Input	Power	Output	Dimmable	Class			Notes
43001F/B	Black	1m	48V	-	-	-		-	30	-
43002F/B	Black	2m	48V	-	-	-		-	20	-
43006FA/B	Black	-	230V	90W	48V DC	NO		100cm	30	-
43006FC/B	Black	-	230V	180W	48V DC	NO		100cm	30	-

The FLAT System Accessories

43002F/B

43004FA/B | End cap box for cable entry

3
YEAR

50



new



43004FG/B | Round corner 90°

3
YEAR

50



new

43004FB/B | Power supply cable

3
YEAR

50



new

43004FJ/B | Corner wall to ceiling | Wall to wall

3
YEAR

50



new

43004FK/B | T-connector

3
YEAR

50



new

43004FL/B | X-connector

3
YEAR

50



new

43004FF/B | Connector | Corner 90°

3
YEAR

50



new



43100FB/B/V

Magnetic Linear Lights

FLAT System CCT V




43100FA/B/V

43100FA | 10W | Linear light | Aluminium



new

IP20




43100FB/B/V

43100FB | 10W | Linear light | Aluminium



new

IP20





43100FC/B/V

43100FC | 20W | Linear light | Aluminium



new

IP20




43100FD/B/V

43100FD | 30W | Linear light | Aluminium



new

IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	Box	Notes
43100FA/B/V	Black	CCT V	3000K-4000K-5000K	10W	800lm	120°	48V	III	30	-
43100FB/B/V	Black	CCT V	3000K-4000K-5000K	10W	800lm	120°	48V	III	30	-
43100FC/B/V	Black	CCT V	3000K-4000K-5000K	20W	1600lm	120°	48V	III	20	-
43100FD/B/V	Black	CCT V	3000K-4000K-5000K	30W	2400lm	120°	48V	III	10	-

Magnetic Linear Spots

FLAT System CCT V




43102FA/B/V

43102FA | 6W | Linear spots | Aluminium



new

IP20





43102FB/B/V

43102FB | 12W | Linear spots | Aluminium



new

IP20





43102FC/B/V

43102FC | 18W | Linear spots | Aluminium



new

IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	Box	Notes
43102FA/B/V	Black	CCT V	3000K-4000K-5000K	6W	540lm	24°	48V	III	50	-
43102FB/B/V	Black	CCT V	3000K-4000K-5000K	12W	1080lm	24°	48V	III	30	-
43102FC/B/V	Black	CCT V	3000K-4000K-5000K	18W	1620lm	24°	48V	III	30	-

Magnetic Adjustable Spots


FLAT System CCT V

one




43116F/B/V

43116F | 5W | Adjustable | Aluminium



new

IP20





43122F/B/V

43122F | 7W | Adjustable | Aluminium



new

IP20






43118F/B/V

43118F | 7W | Adjustable | Honeycomb | Aluminium




new

IP20

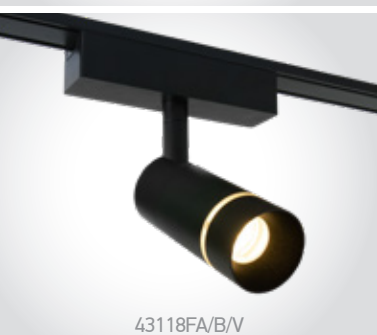


43118FA/B/V

43118FA | 7W | Adjustable | Aluminium




new

IP20





43120F/B/V

43120F | 10W | Adjustable | Aluminium



new

IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
43116F/B/V	Black	CCT V	3000K-4000K-5000K	5W	450lm	38°	48V	III	50	-
43122F/B/V	Black	CCT V	3000K-4000K-5000K	7W	630lm	38°	48V	III	30	-
43118F/B/V	Black	CCT V	3000K-4000K-5000K	7W	630lm	38°	48V	III	25	-
43118FA/B/V	Black	CCT V	3000K-4000K-5000K	7W	630lm	38°	48V	III	25	-
43120F/B/V	Black	CCT V	3000K-4000K-5000K	10W	900lm	38°	48V	III	30	-

43108FA/B/V

43106FA/B/V

Magnetic Adjustable Linear Spots

FLAT System CCT V





43106FA/B/V

43106FA | 6W | Linear spots | Adjustable | Aluminium


new

IP20





43106FB/B/V

43106FB | 12W | Linear spots | Adjustable | Aluminium


new

IP20

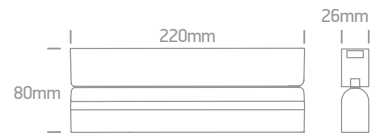


43108FA/B/V

43108FA | 5W | Linear light | Adjustable | Aluminium


new

IP20



43108FB/B/V

43108FB | 10W | Linear light | Adjustable | Aluminium


new

IP20




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
43106FA/B/V	Black	CCT V	3000K-4000K-5000K	6W	540lm	24°	48V		50	-
43106FB/B/V	Black	CCT V	3000K-4000K-5000K	12W	1080lm	24°	48V		30	-
43108FA/B/V	Black	CCT V	3000K-4000K-5000K	5W	400lm	120°	48V		50	-
43108FB/B/V	Black	CCT V	3000K-4000K-5000K	10W	800lm	120°	48V		30	-

Magnetic Lights FLAT System CCT V



43110F | 6W | Honeycomb | Aluminium



43112F | 9W | Aluminium



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
43110F/B/V	Black	CCT V	3000K-4000K-5000K	6W	540lm	24°	48V	III	50	-
43112F/B/V	Black	CCT V	3000K-4000K-5000K	9W	450lm	-	48V	III	30	-

Magnetic Lights

FLAT System

43128FA/B/W



43128FA/B/W

43128FA | 16W | Plastic



new

IP20




43126FA/B/V

43126FA | 10W | Adjustable | Plastic




new

IP20




43126FB/B/V

43126FB | 20W | Adjustable | Plastic



new

IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
43128FA/B/W	Black	Warm white	3000K	16W	500lm	48V	III	10	-
43126FA/B/V	Black	CCT V	3000K-4000K-5000K	10W	900lm	48V	III	30	-
43126FB/B/V	Black	CCT V	3000K-4000K-5000K	20W	1800lm	48V	III	20	-