



Office & Kitchen

Pages 333-354

10



The Magnifying Lens LED Lamp




61066 | 8W | SMD | Plastic


Magnifying lens.



IP20




61066T | White floor stand for 61066




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
61066/W	White	Daylight	6000K	8W	760lm	230V		4	Complete with driver & SCHUKO plug



Reading LED Lamps

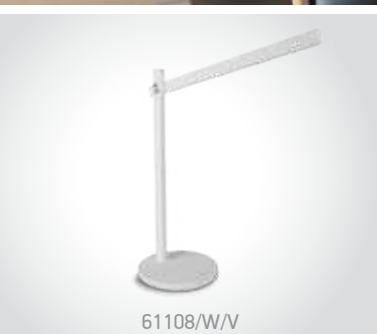

61108 | 5,5W | SMD | Dimmable | Aluminium






IP20



61110 | 5W | SMD | Dimmable | ABS





IP20

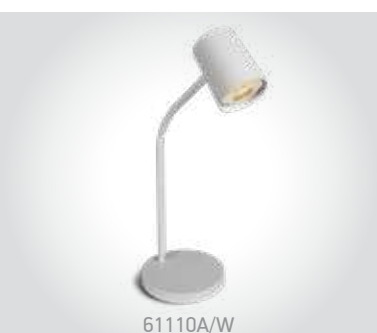

61110A | 10W | MR16 | GU10 | ABS



IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
61108/W/V	White	CCT V	3000K-4000K- 6500K	5,5W	300lm	230V / 12V		8	With EU plug
61108/B/V	Black	CCT V	3000K-4000K-6500K	5,5W	300lm	230V / 12V		8	With EU plug
61110/W/W	White	Warm white	3000K	5W	200lm	230V / 12V		12	With EU plug
61110/B/W	Black	Warm white	3000K	5W	200lm	230V / 12V		12	With EU plug
61110A/W	White	-	-	10W	-	100-240V		12	With EU plug
61110A/B	Black	-	-	10W	-	100-240V		12	With EU plug



The LED Linear Range

CCT V




38225M/W/V


38225M | 25W | SMD | Aluminium + Plastic



IP20



Optional suspension kit.
Order code 050090.




38248M/W/V


38248M | 48W | SMD | Aluminium + Plastic



IP20



Optional suspension kit.
Order code 050090.



38250M/W/V


38250M | 50W | SMD | Aluminium + Plastic




IP20



Optional suspension kit.
Order code 050090.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	8	Notes
38225M/W/V	White	CCT V	3000K-4000K-6500K	25W	2250lm	120°	230V	⚡	8	Complete with driver
38248M/W/V	White	CCT V	3000K-4000K-6500K	48W	4320lm	120°	230V	⚡	6	Complete with driver
38250M/W/V	White	CCT V	3000K-4000K-6500K	50W	4500lm	120°	230V	⚡	6	Complete with driver

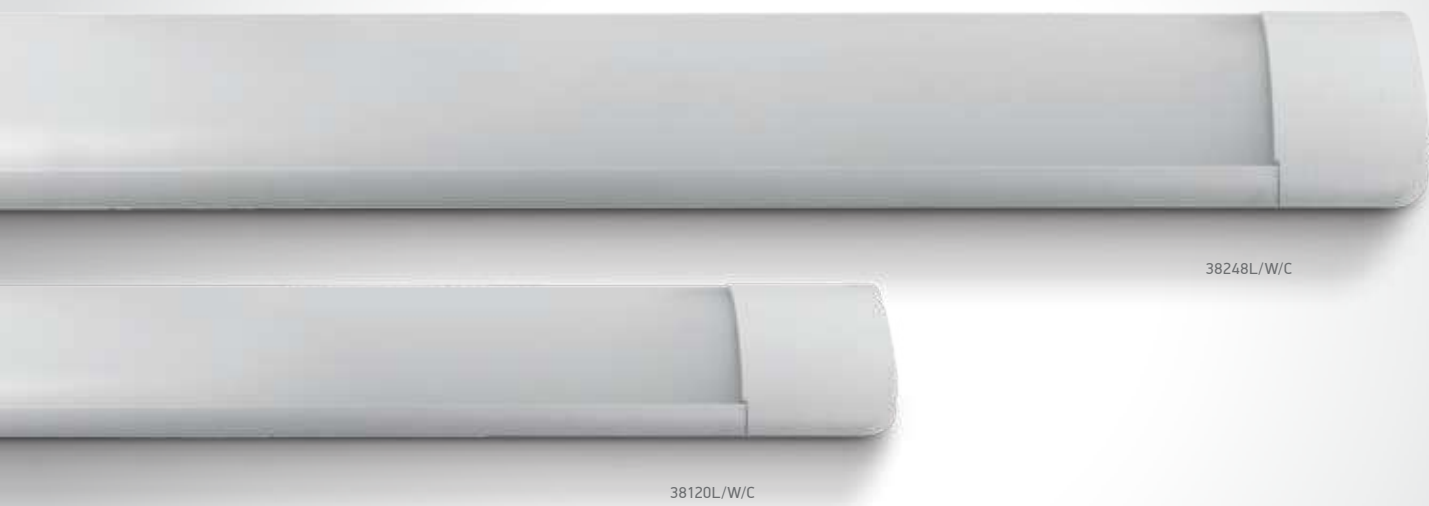

The LED Linear Range




38120L/W/W

38120L | 20W | SMD | Aluminium + PC



IP20




38135L/W/W

38135L | 35W | SMD | Aluminium + PC



IP20




38248L/W/W

38248L | 48W | SMD | Aluminium + PC



IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38120L/W/C	White	Cool white	4000K	20W	1800lm	230V	⊕	12	Complete with driver
38120L/W/W	White	Warm white	3000K	20W	1700lm	230V	⊕	12	Complete with driver
38135L/W/W	White	Warm white	3000K	35W	3000lm	230V	⊕	12	Complete with driver
38248L/W/C	White	Cool white	4000K	48W	4300lm	230V	⊕	12	Complete with driver
38248L/W/W	White	Warm white	3000K	48W	4200lm	230V	⊕	12	Complete with driver

LED Linear Floating Light



38148N | 48W | SMD | Aluminium + PC



IP20



40mm

1200mm

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38148N/C	White	Cool white	4000K	48W	4800lm	230V	⊕	4	Complete with driver
38148N/W	White	Warm white	3000K	48W	4800lm	230V	⊕	4	Complete with driver

Suspended Up/Down UGR19



38012A | 40W Downlight + Uplight | SMD | 30x120 suspended panel | Aluminium + PMMA | Microprismatic





90 CRI UGR19 CCT V

new

IP20

CE 3 YEAR



38012B | 50W Downlight + Uplight | SMD | 30x150 suspended panel | Aluminium + PMMA | Microprismatic





90 CRI UGR19 CCT V

new

IP20

CE 3 YEAR

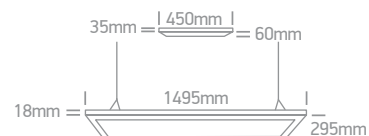

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38012A/W/V	White	CCT V	3000K-4000K-5700K	40W	4000lm	230V	⌚	4	Complete with 1050mA driver
38012B/W/V	White	CCT V	3000K-4000K-5700K	50W	5000lm	230V	⌚	4	Complete with 1300mA driver

Opal Backlit Panels



62140RF/W/W

62140RF | 40W | SMD | Aluminium



IP40



62140RE/W/C

62140RE | 40W | SMD | Aluminium + steel



IP20



Backlit.

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62140RF/W/W	White	Warm white	3000K	40W	2700lm	230V		5	Complete with 1000mA driver
62140RE/W/C	White	Cool white	4000K	40W	4000lm	230V		4	Complete with 1000mA driver


62140BFU/W/V

62150BFU/B/V

UGR19 Backlit Panels

62140BFU | 30W | SMD | Aluminium + steel | Microprismatic

Backlit.




62140BFU/W/V

IP20

62150BFU | 40W | SMD | Aluminium + steel | Microprismatic

Backlit.



62150BFU/W/V

IP20

62150BFU/B/V

62140BRU | 40W | SMD | Aluminium + steel | Microprismatic

Backlit.




62140BRU/W/V

IP20

62150BRU | 50W | SMD | Aluminium + steel | Microprismatic

Backlit.



62150BRU/W/V

IP20

62150BRU/B/V

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62140BFU/W/V	White	CCT V	3000K-4000K-5700K	30W	2700lm-3000lm-2850lm	230V		4	Complete with 800mA driver
62150BFU/W/V	White	CCT V	3000K-4000K-5700K	40W	3600lm-4000lm-3800lm	230V		4	Complete with 1000mA driver
62150BFU/B/V	Black	CCT V	3000K-4000K-5700K	40W	3600lm-4000lm-3800lm	230V		4	Complete with 1000mA driver
62140BRU/W/V	White	CCT V	3000K-4000K-5700K	40W	3600lm-4000lm-3800lm	230V		4	Complete with 1000mA driver
62150BRU/W/V	White	CCT V	3000K-4000K-5700K	50W	4500lm-5000lm-4750lm	230V		4	Complete with 1200mA driver
62150BRU/B/V	Black	CCT V	3000K-4000K-5700K	50W	4500lm-5000lm-4750lm	230V		4	Complete with 1200mA driver

LED Linear Profiles

Medium size



38150B | 40W | 48LEDs | Linear system | Aluminium

Can be connected in line.



DALI DRIVER Page 703



38150C | 40W | 24LEDs + Diffuser | Linear system | Aluminium

Can be connected in line.




DALI DRIVER Page 703



38150BU | 40W + 20W Uplight | 48LEDs + Diffuser | Linear system | Aluminium

Can be connected in line.



DALI DRIVER Page 703



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏏	📦	Notes
38150B/W/C	White	Cool white	4000K	40W	3800lm	34°	230V	⏏	300cm	12	Complete with 1000mA driver
38150B/W/W	White	Warm white	3000K	40W	3800lm	34°	230V	⏏	300cm	12	Complete with 1000mA driver
38150B/B/W	Black	Warm white	3000K	40W	3800lm	34°	230V	⏏	300cm	12	Complete with 1000mA driver
38150C/W/C	White	Cool white	4000K	40W	3400lm	-	230V	⏏	300cm	12	Complete with 1000mA driver
38150C/W/W	White	Warm white	3000K	40W	3400lm	-	230V	⏏	300cm	12	Complete with 1000mA driver
38150BU/W/W	White	Warm white	3000K	40W-20W	3800lm-1800lm	34°-120°	230V	⏏	300cm	12	Complete with 1000mA + 500mA drivers
38150BU/B/C	Black	Cool white	4000K	40W-20W	3800lm-1800lm	34°-120°	230V	⏏	300cm	12	Complete with 1000mA + 500mA drivers

CCT V LED Linear Profiles

Medium size



38150C/B/V

38150B/B/V



38150B/W/V

38150B | 40W PV | 48LEDs | Linear system | Aluminium

Can be connected in line.



38150B/B/V



Complete with
4pcs fixing clips
& 4pcs connectors.



38150C/B/V

38150C | 40W PV | 24LEDs + Diffuser | Linear system | Aluminium

Can be connected in line.



Complete with
4pcs fixing clips
& 4pcs connectors.



38150BU/W/V

38150BU | 40W PV + 25W PV Uplight | 48LEDs + Diffuser | Linear system | Aluminium

Can be connected in line.



38150BU/B/V



Complete with
4pcs fixing clips
& 4pcs connectors.



050170 | 3m Suspension kit for 38140AU, 38150A, 38151A, 38150B, 38150BU, 38150C, 38160A & 38161A



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏻	📦	Notes
38150B/W/V	White	CCT V	3000K-4000K-5000K	20W-30W-40W	3800lm@40W	34°	230V	⚡	300cm	12	Complete with PV driver
38150B/B/V	Black	CCT V	3000K-4000K-5000K	20W-30W-40W	3800lm@40W	34°	230V	⚡	300cm	12	Complete with PV driver
38150C/B/V	Black	CCT V	3000K-4000K-5000K	20W-30W-40W	3400lm@40W	-	230V	⚡	300cm	12	Complete with PV driver
38150BU/W/V	White	CCT V	3000K-4000K-5000K	20W-30W-40W+16W-20W-25W	3800lm-1800lm	34°-120°	230V	⚡	300cm	12	Complete with 2x PV drivers
38150BU/B/V	Black	CCT V	3000K-4000K-5000K	20W-30W-40W+16W-20W-25W	3800lm-1800lm	34°-120°	230V	⚡	300cm	12	Complete with 2x PV drivers

LED Linear Profiles Medium size



38150A/W/C

38150A | 40W | SMD | Linear system | Diffuser | Aluminium | Microprismatic

Can be connected in line.



IP20



Complete with
4pcs fixing clips
& 4pcs connectors.

dalí
DRIVER
Page 703



38151A/W/W

38151A | 50W | SMD | Linear system | Diffuser | Aluminium | Microprismatic

Can be connected in line.



IP20



38151A/B/W



Complete with
4pcs fixing clips
& 4pcs connectors.

dalí
DRIVER
Page 703



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
38150A/W/C	White	Cool white	4000K	40W	3400lm	230V		300cm	12	Complete with 1000mA driver
38150A/W/W	White	Warm white	3000K	40W	3400lm	230V		300cm	12	Complete with 1000mA driver
38151A/W/W	White	Warm white	3000K	50W	4250lm	230V		300cm	9	Complete with 1250mA driver
38151A/B/W	Black	Warm white	3000K	50W	4250lm	230V		300cm	9	Complete with 1250mA driver



38150A/W/V

38151A/B/V

CCT V LED Linear Profiles

Medium size



38150A/W/V

38150A | 40W PV | SMD | Linear system | Diffuser | Aluminium | Microprismatic

Can be connected in line.



IP20



38150A/B/V



Complete with
4pcs fixing clips
& 4pcs connectors.



38151A/W/V

38151A | 50W PV | SMD | Linear system | Diffuser | Aluminium | Microprismatic

Can be connected in line.



IP20



38151A/B/V



Complete with
4pcs fixing clips
& 4pcs connectors.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	⚡	📦	Notes
38150A/W/V	White	CCT V	3000K-4000K-5000K	20W-30W-40W	3400lm@40W	230V	⚡	300cm	12	Complete with PV driver
38150A/B/V	Black	CCT V	3000K-4000K-5000K	20W-30W-40W	3400lm@40W	230V	⚡	300cm	12	Complete with PV driver
38151A/W/V	White	CCT V	3000K-4000K-5000K	30W-40W-50W	4250lm@50W	230V	⚡	300cm	9	Complete with PV driver
38151A/B/V	Black	CCT V	3000K-4000K-5000K	30W-40W-50W	4250lm@50W	230V	⚡	300cm	9	Complete with PV driver

LED Linear Accessories

Medium size


one



050170D | 8W | SMD | Corner for 38150A & 38151A | Diffuser | Aluminium | Microprismatic




IP20



050170D | 14W PV | SMD | Corner for 38150A & 38151A | Diffuser | Aluminium | Microprismatic



IP20



38150E | 1m Profile for 38150A, 38150B, 38150BU, 38150C & 38151A

Can be connected in line.




IP20



050170C | Corner for 38150A, 38150B, 38150BU, 38150C & 38151A



IP20



050170 | 3m Suspension kit for 38140AU, 38150A, 38151A, 38150B, 38150BU, 38150C, 38160A & 38161A



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
050170D/W/C	White	Cool white	4000K	8W	680lm	230V		150cm	10	Complete with 250mA driver
050170D/W/W	White	Warm white	3000K	8W	680lm	230V		150cm	10	Complete with 250mA driver
050170D/B/C	Black	Cool white	4000K	8W	680lm	230V		150cm	10	Complete with 250mA driver
050170D/W/V	White	CCT V	3000K-4000K-5000K	6W-8W-10W-14W	680lm@8W	230V		150cm	10	Complete with PV driver
050170D/B/V	Black	CCT V	3000K-4000K-5000K	6W-8W-10W-14W	680lm@8W	230V		150cm	10	Complete with PV driver

Up & Down LED Linear Profiles




38140AU/W/C

38140AU | 40W Downlight + Uplight | SMD | Linear suspended | Aluminium



IP20



Complete with
3m suspension kit.



38140AU/B/C

38140AU | 40W Downlight + Uplight | SMD | Linear suspended | Aluminium



IP20



Complete with
3m suspension kit.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Box	Notes
38140AU/W/C	White	Cool white	4000K	40W	3600lm	230V	⊕	12	Complete with 900mA driver
38140AU/W/W	White	Warm white	3000K	40W	3600lm	230V	⊕	12	Complete with 900mA driver
38140AU/B/C	Black	Cool white	4000K	40W	3600lm	230V	⊕	12	Complete with 900mA driver
38140AU/B/W	Black	Warm white	3000K	40W	3600lm	230V	⊕	12	Complete with 900mA driver

LED Linear Profiles

Large size



38160A | 40W | SMD | Linear system | Diffuser | Aluminium | Microprismatic

Can be connected in line.



Complete with
4pcs fixing clips
& 4pcs connectors.

dalí
DRIVER
Page 703



38161A | 50W | SMD | Linear system | Diffuser | Aluminium | Microprismatic

Can be connected in line.



38161A/B/W



Complete with
5pcs fixing clips
& 4pcs connectors.

dalí
DRIVER
Page 703



050170 | 3m Suspension kit for 38140AU, 38150A, 38151A, 38150B, 38150BU, 38150C, 38160A & 38161A



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
38160A/W/C	White	Cool white	4000K	40W	3400lm	230V		300cm	12	Complete with 1000mA driver
38160A/W/W	White	Warm white	3000K	40W	3400lm	230V		300cm	12	Complete with 1000mA driver
38161A/W/C	White	Cool white	4000K	50W	4250lm	230V		300cm	9	Complete with 1250mA driver
38161A/W/W	White	Warm white	3000K	50W	4250lm	230V		300cm	9	Complete with 1250mA driver
38161A/B/W	Black	Warm white	3000K	50W	4250lm	230V		300cm	9	Complete with 1250mA driver



38161A/B/V

38160A/B/V

CCT V LED Linear Profiles


Large size



38160A/W/V

38160A | 40W PV | SMD | Linear system | Diffuser | Aluminium | Microprismatic

Can be connected in line.



IP20




Complete with
4pcs fixing clips &
4pcs connectors.



38160A/B/V

38160A | 40W PV | SMD | Linear system | Diffuser | Aluminium | Microprismatic

Can be connected in line.



IP20




Complete with
4pcs fixing clips &
4pcs connectors.



38161A/W/V

38161A | 50W PV | SMD | Linear System | Diffuser | Aluminium | Microprismatic

Can be connected in line.



IP20




Complete with
5pcs fixing clips &
4pcs connectors.



38161A/B/V

38161A | 50W PV | SMD | Linear System | Diffuser | Aluminium | Microprismatic

Can be connected in line.



IP20



Complete with
5pcs fixing clips &
4pcs connectors.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
38160A/W/V	White	CCT V	3000K-4000K-5000K	20W-30W-40W	3400lm@40W	230V		300cm	12	Complete with PV driver
38160A/B/V	Black	CCT V	3000K-4000K-5000K	20W-30W-40W	3400lm@40W	230V		300cm	12	Complete with PV driver
38161A/W/V	White	CCT V	3000K-4000K-5000K	30W-40W-50W	4250lm@50W	230V		300cm	9	Complete with PV driver
38161A/B/V	Black	CCT V	3000K-4000K-5000K	30W-40W-50W	4250lm@50W	230V		300cm	9	Complete with PV driver



38145AR/B/W

38150AR/W/W

UGR19 Recessed LED Linear Profiles



38145AR/B/C

38145AR | 40W | SMD | Recessed linear system | Aluminium | Microprismatic

Can be connected in line.




IP20



Complete with 6pcs fixing clips, 4pcs connectors & 2pcs end caps.

dali
DRIVER
Page 703



38150AR/W/C

38150AR | 40W | SMD | Recessed linear system | Aluminium | Microprismatic

Can be connected in line.




IP20



Complete with 6pcs fixing clips, 4pcs connectors & 2pcs end caps.

dali
DRIVER
Page 703



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
38145AR/W/W	White	Warm white	3000K	40W	3800lm	230V	Ⓢ	1200x37mm	80mm	12	Complete with 1000mA driver
38145AR/B/C	Black	Cool white	4000K	40W	3800lm	230V	Ⓢ	1200x37mm	80mm	12	Complete with 1000mA driver
38145AR/B/W	Black	Warm white	3000K	40W	3800lm	230V	Ⓢ	1200x37mm	80mm	12	Complete with 1000mA driver
38150AR/W/C	White	Cool white	4000K	40W	3600lm	230V	Ⓢ	1200x68mm	80mm	12	Complete with 1000mA driver
38150AR/W/W	White	Warm white	3000K	40W	3600lm	230V	Ⓢ	1200x68mm	80mm	12	Complete with 1000mA driver

UGR19 Recessed LED Linear Profile

CCT V



38145AR/W/V

38145AR | 40W PV | SMD | Recessed linear system | Aluminium | Microprismatic


Can be connected in line.



IP20



Complete with 6pcs fixing clips, 4pcs connectors & 2pcs end caps.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
38145AR/W/V	White	CCT V	3000K-4000K-5000K	20W-30W-40W	3800lm@40W	230V		1200x37mm	80mm	12	Complete with PV driver



38152R/W/V

38152R/B/W

Opal Recessed LED Linear Profiles



38152R/W/C

38152R | 40W | SMD | Recessed linear system | Aluminium

Can be connected in line.




IP20



38152R/B/W



Complete with 6pcs fixing clips, 4pcs connectors & 2pcs end caps.



38152RC/W/C

38152RC | 8W | SMD | Corner for 38152R | Aluminium




IP20



38152RC/W/W



Complete with 4pcs fixing clips & 4pcs connectors.



38152RL/W/C

38152RL | 10W | SMD | Ceiling to wall corner for 38152R | Aluminium




IP20



38152RL/W/W



Complete with 4pcs fixing clips & 4pcs connectors.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
38152R/W/C	White	Cool white	4000K	40W	3600lm	120°	230V		1200x60mm	80mm	12	Complete with 1000mA driver
38152R/B/W	Black	Warm white	3000K	40W	3600lm	120°	230V		1200x60mm	80mm	12	Complete with 1000mA driver
38152RC/W/C	White	Cool white	4000K	8W	720lm	120°	230V		160x160x60mm	80mm	10	Complete with 200mA driver
38152RC/W/W	White	Warm white	3000K	8W	720lm	120°	230V		160x160x60mm	80mm	10	Complete with 200mA driver
38152RL/W/C	White	Cool white	4000K	10W	900lm	120°	230V		100x100x60mm	80mm	6	Complete with 200mA driver
38152RL/W/W	White	Warm white	3000K	10W	900lm	120°	230V		100x100x60mm	80mm	6	Complete with 200mA driver


Opal Recessed LED Linear Profiles

CCT V



38152R | 40W PV | SMD | Recessed linear system | Aluminium

Can be connected in line.




IP20



Complete with 6pcs fixing clips, 4pcs connectors & 2pcs end caps.




38152RC | 14W PV | SMD | Corner for 38152R | Aluminium



IP20



Complete with 4pcs fixing clips, 4pcs connectors.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
38152R/W/V	White	CCT V	3000K-4000K-5000K	20W-30W-40W	3600lm@40W	120°	230V	⊕	1200x60mm	80mm	12	Complete with PV driver
38152RC/W/V	White	CCT V	3000K-4000K-5000K	6W-8W-10W-14W	720lm@8W	120°	230V	⊕	211x211x60mm	80mm	10	Complete with PV driver



38150BR/B/C


UGR17 Recessed LED Linear Profiles




38145BR/W/V

38145BR | 40W PV | SMD | Recessed linear system | Aluminium

Can be connected in line.




Complete with 6pcs fixing clips, 4pcs connectors & 2pcs end caps.



38150BR/W/C

38150BR | 40W | SMD | Recessed linear system | Aluminium


Can be connected in line.



38150BR/B/C



Complete with 6pcs fixing clips, 4pcs connectors & 2pcs end caps.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
38145BR/W/V	White	CCT V	3000K-4000K-5000K	20W-30W-40W	4000lm@40W	34°	230V	⊕	1280x37mm	80mm	12		Complete with PV driver
38150BR/W/C	White	Cool white	4000K	40W	4000lm	34°	230V	⊕	1280x68mm	80mm	12		Complete with 1000mA driver
38150BR/W/W	White	Warm white	3000K	40W	4000lm	34°	230V	⊕	1280x68mm	80mm	12		Complete with 1000mA driver
38150BR/B/C	Black	Cool white	4000K	40W	4000lm	34°	230V	⊕	1280x68mm	80mm	12		Complete with 1000mA driver
38150BR/B/W	Black	Warm white	3000K	40W	4000lm	34°	230V	⊕	1280x68mm	80mm	12		Complete with 1000mA driver

The Office Floor Stand Range

Aluminium



36002 | 60W | LED | Touch switch | Aluminium

EU Plug.



IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
36002/W/C	White	Cool white	4000K	60W	8000lm	230V	⊕	1	Complete with 2x700mA drivers
36002/B/C	Black	Cool white	4000K	60W	8000lm	230V	⊕	1	Complete with 2x700mA drivers