



Wall Recessed & Inground

Pages 581-608

18





68006N/W + 050176/G



68007/W/W


Indoor Square Wall Recessed



68007/W/W

68007 | 1,5W | LED | Plastic


Supplied with box for concrete installation.



68007/B/W

68007 | 1,5W | LED | Plastic

Supplied with box for concrete installation.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
68007/W/W	White	Warm white	3000K	1,5W	100lm	100-240V		86x86mm	40mm	50	Complete with driver
68007/B/W	Black	Warm white	3000K	1,5W	70lm	100-240V		86x86mm	40mm	50	Complete with driver

Dark Light Wall Recessed




68006N | 1W | SMD | Aluminium


Cover plate must be ordered separately.



68006N/W



050176/W White




050176/B Black



050176/G Grey

68006N/BOX | Suitable for 68006N & 68000B | Plastic

Gypsum installation.

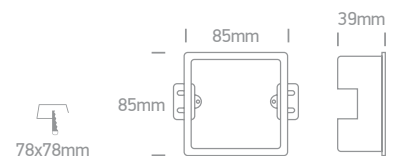

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class						Notes
68006N/W	White	Warm white	3000K	1W	80lm	230V						20	Complete with 350mA driver

Dark Light Step Series

Aluminium




68074/B/W



68074A/B/W

68074B/W/W

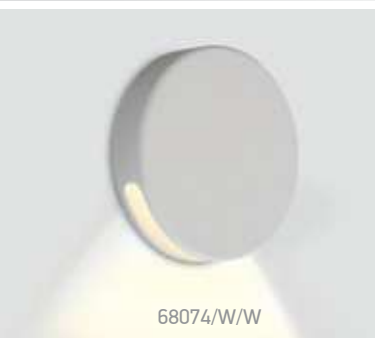


68074/W/W

68074 | 2W | COB | Aluminium



68074/B/W




68074A/W/W

68074A | 2W | COB | Aluminium




68074A/B/W



68074B/W/W

68074B | 2W | COB | Aluminium

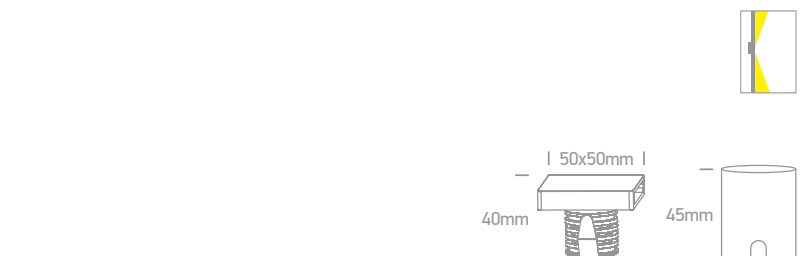

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class					Notes
68074/W/W	White	Warm white	3000K	2W	100lm	700mA		200cm	35mm	55mm	100	Requires 700mA driver
68074/B/W	Black	Warm white	3000K	2W	100lm	700mA		200cm	35mm	55mm	100	Requires 700mA driver
68074A/W/W	White	Warm white	3000K	2W	100lm	700mA		200cm	35mm	55mm	100	Requires 700mA driver
68074A/B/W	Black	Warm white	3000K	2W	100lm	700mA		200cm	35mm	55mm	100	Requires 700mA driver
68074B/W/W	White	Warm white	3000K	2W	110lm	700mA		200cm	35mm	55mm	100	Requires 700mA driver



68004A/W/W

68070/AL/W


Indoor/Outdoor Decorative Wall Recessed Aluminium




68070/W/W

68070 | 1W | COB | Aluminium


Driver can not pass through the cutout hole. / Supplied with box for concrete installation.





IP65



68070/B/W




68070/AL/W

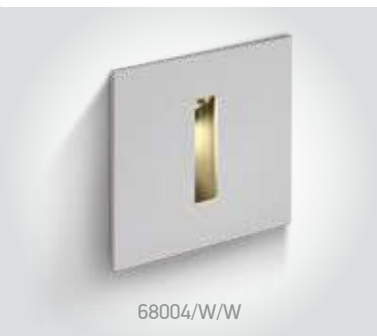


68004/W/W

68004 | 3W | COB | Aluminium

Supplied with box for concrete installation.




DARK LIGHT
IP54




68004A/W/W

68004A | 1W | COB | Aluminium

Driver can not pass through the cutout hole. / Supplied with box for concrete installation.




DARK LIGHT
IP54







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	Concrete installation	Gypsum installation	Notes
68070/W/W	White	Warm white	3000K	1W	50lm	36°	350mA	III	200cm	35mm 60mm	Requires 350mA driver
68070/B/W	Black	Warm white	3000K	1W	50lm	36°	350mA	III	200cm	35mm 60mm	Requires 350mA driver
68070/AL/W	Aluminium	Warm white	3000K	1W	50lm	36°	350mA	III	200cm	35mm 60mm	Requires 350mA driver
68004/W/W	White	Warm white	3000K	3W	120lm	24°	350mA	III	200cm	52mm 110mm	Requires 350mA driver
68004A/W/W	White	Warm white	3000K	1W	40lm	60°	350mA	III	200cm	35mm 50mm	Requires 350mA driver

Indoor/Outdoor Dark Light Wall Recessed

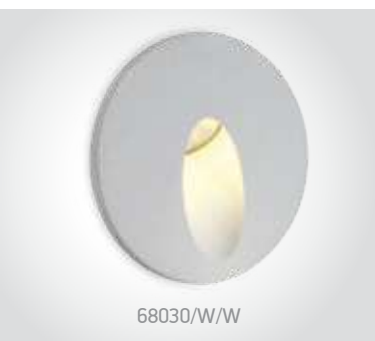



68030 | 3W | LED | Aluminium

Supplied with box for concrete installation.

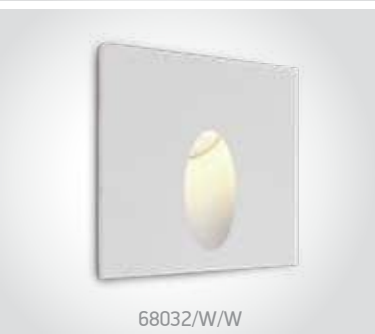

68032 | 3W | LED | Aluminium

Supplied with box for concrete installation.



Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class	Light Head	Concrete installation	Gypsum installation	Box	Notes
68030/W/W	White	Warm white	3000K	3W	100-240V	□	52mm	110mm	50mm	30	Complete with 700mA driver
68030/B/W	Black	Warm white	3000K	3W	100-240V	□	52mm	110mm	50mm	30	Complete with 700mA driver
68030/AL/W	Aluminium	Warm white	3000K	3W	100-240V	□	52mm	110mm	50mm	30	Complete with 700mA driver
68032/W/W	White	Warm white	3000K	3W	100-240V	□	52mm	110mm	50mm	30	Complete with 700mA driver
68032/B/W	Black	Warm white	3000K	3W	100-240V	□	52mm	110mm	50mm	30	Complete with 700mA driver
68032/G/W	Grey	Warm white	3000K	3W	100-240V	□	52mm	110mm	50mm	30	Complete with 700mA driver

Indoor/Outdoor Dark Light Wall Recessed

68000B | 3W | SMD | British standard box | Aluminium

Cover plate must be ordered separately.




68000B/W/V



68000B/B/V



68000B/W/V + 050000B3/B



050000B1/W White
050000B1/B Black



050000B2/W White
050000B2/B Black



050000B3/W White
050000B3/B Black



050000B4/W White
050000B4/B Black



050000B5/W White
050000B5/B Black

68000E | 3W | SMD | European round box | Aluminium

Cover plate must be ordered separately.




68000E/W/V



68000E/B/V



68000E/W/V + 050000E2/B



050000E1/W White
050000E1/B Black



050000E2/W White
050000E2/B Black



050000E3/W White
050000E3/B Black



050000E4/W White
050000E4/B Black




050000E5/W White
050000E5/B Black



050000E6/W White
050000E6/B Black

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
68000B/W/V	White	CCT V	2500K-2800K-3000K-3500K-4000K	3W	180lm	230V		20cm	20	Complete with 230mA driver
68000B/B/V	Black	CCT V	2500K-2800K-3000K-3500K-4000K	3W	180lm	230V		20cm	20	Complete with 230mA driver
68000E/W/V	White	CCT V	2500K-2800K-3000K-3500K-4000K	3W	180lm	230V		20cm	20	Complete with 230mA driver
68000E/B/V	Black	CCT V	2500K-2800K-3000K-3500K-4000K	3W	180lm	230V		20cm	20	Complete with 230mA driver


Outdoor Dark Light Wall Recessed Aluminium

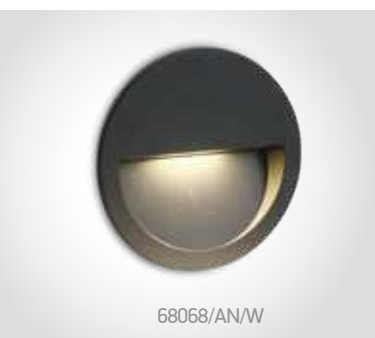


68068/AN/W

68068 | 3W | SMD | Aluminium


Supplied with box for concrete installation.



68068/W/W



68068/G/W




68068A/B/W

68068A | 4W | SMD | Aluminium


Supplied with box for concrete installation.



68068A/W/W



68068A/G/W



68068C/AN/W

68068C | 7W | SMD | Aluminium


Supplied with box for concrete installation.



68068C/W/W



68068C/G/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Concrete installation	Gypsum installation	Height	Box	Notes
68068/W/W	White	Warm white	3000K	3W	300lm	100-240V	⊕	110mm	100mm	60mm	24	Complete with 350mA driver
68068/AN/W	Anthracite	Warm white	3000K	3W	300lm	100-240V	⊕	110mm	100mm	60mm	24	Complete with 350mA driver
68068/G/W	Grey	Warm white	3000K	3W	300lm	100-240V	⊕	110mm	100mm	60mm	24	Complete with 350mA driver
68068A/W/W	White	Warm white	3000K	4W	300lm	100-240V	⊕	110x110mm	100x100mm	60mm	24	Complete with 350mA driver
68068A/B/W	Black	Warm white	3000K	4W	300lm	100-240V	⊕	110x110mm	100x100mm	60mm	24	Complete with 350mA driver
68068A/G/W	Grey	Warm white	3000K	4W	300lm	100-240V	⊕	110x110mm	100x100mm	60mm	24	Complete with 350mA driver
68068C/W/W	White	Warm white	3000K	7W	550lm	100-240V	⊕	220x70mm	210x60mm	80mm	12	Complete with 350mA driver
68068C/AN/W	Anthracite	Warm white	3000K	7W	550lm	100-240V	⊕	220x70mm	210x60mm	80mm	12	Complete with 350mA driver
68068C/G/W	Grey	Warm white	3000K	7W	550lm	100-240V	⊕	220x70mm	210x60mm	80mm	12	Complete with 350mA driver

one

Outdoor Dark Light Wall Recessed

CCT V



68068C/AN/V


68068A/AN/V

68068 | 3W | SMD | Aluminium


Supplied with box for concrete installation.



68068/AN/V



68068/W/V




68068A | 3W | SMD | Aluminium


Supplied with box for concrete installation.




68068A/AN/V



68068A/W/V



68068A/B/V




68068B | 6W | SMD | Aluminium


Supplied with box for concrete installation.



68068B/AN/V




68068B/W/V



68068B/B/V



68068B/G/V



68068C | 6W | SMD | Aluminium

Supplied with box for concrete installation.




68068C/AN/V



68068C/B/V



68068C/G/V



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Concrete installation	Gypsum installation	Height	Width	Depth	Notes
68068/W/V	White	CCT V	2200K-2700K-3000K-4000K	3W	300lm	230V	⊕	110mm	100mm	60mm	24		Complete with 350mA driver
68068/AN/V	Anthracite	CCT V	2200K-2700K-3000K-4000K	3W	300lm	230V	⊕	110mm	100mm	60mm	24		Complete with 350mA driver
68068A/W/V	White	CCT V	2200K-2700K-3000K-4000K	3W	300lm	230V	⊕	110x110mm	100x100mm	60mm	24		Complete with 350mA driver
68068A/AN/V	Anthracite	CCT V	2200K-2700K-3000K-4000K	3W	300lm	230V	⊕	110x110mm	100x100mm	60mm	24		Complete with 350mA driver
68068A/B/V	Black	CCT V	2200K-2700K-3000K-4000K	3W	300lm	230V	⊕	110x110mm	100x100mm	60mm	24		Complete with 350mA driver
68068B/W/V	White	CCT V	2200K-2700K-3000K-4000K	6W	400lm	230V	⊕	145x70mm	130x60mm	80mm	12		Complete with 300mA driver
68068B/AN/V	Anthracite	CCT V	2200K-2700K-3000K-4000K	6W	400lm	230V	⊕	145x70mm	130x60mm	80mm	12		Complete with 300mA driver
68068B/B/V	Black	CCT V	2200K-2700K-3000K-4000K	6W	400lm	230V	⊕	145x70mm	130x60mm	80mm	12		Complete with 300mA driver
68068B/G/V	Grey	CCT V	2200K-2700K-3000K-4000K	6W	400lm	230V	⊕	145x70mm	130x60mm	80mm	12		Complete with 300mA driver
68068C/AN/V	Anthracite	CCT V	2200K-2700K-3000K-4000K	6W	550lm	230V	⊕	220x70mm	210x60mm	80mm	12		Complete with 300mA driver
68068C/B/V	Black	CCT V	2200K-2700K-3000K-4000K	6W	550lm	230V	⊕	220x70mm	210x60mm	80mm	12		Complete with 300mA driver
68068C/G/V	Grey	CCT V	2200K-2700K-3000K-4000K	6W	550lm	230V	⊕	220x70mm	210x60mm	80mm	12		Complete with 300mA driver

Wall Recessed Decorative



68072A | 5W | SMD | Stainless steel 316 + tempered glass



68072A/W



IP65



Supplied with box for concrete installation.



68072C | 10W | SMD | Stainless steel 316 + tempered glass



68072C/W



IP65



Supplied with box for concrete installation.



68076 | 3W | SMD | Glass + metal

Supplied with box for concrete installation.



68076/W/W




DARK LIGHT

IP65



68076/B/W

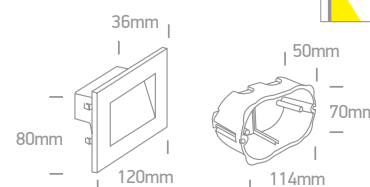

68076A | 4W | SMD | Glass + metal

Supplied with box for concrete installation.



68076A/W/W




DARK LIGHT

IP65



68076A/B/W

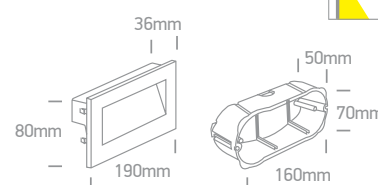




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Concrete installation	Gypsum installation	Height	Box	Notes
68072A/W	Stainless steel	Warm white	3000K	5W	100lm	230V	⊕	112x42mm	98x35mm	75mm	24	Complete with 350mA driver
68072C/W	Stainless steel	Warm white	3000K	10W	200lm	230V	⊕	253x55mm	240x45mm	75mm	12	Complete with 350mA driver
68076/W/W	White	Warm white	3000K	3W	200lm	230V	⊕	115x70mm	2x68mm	55mm	12	AC LED
68076/B/W	Black	Warm white	3000K	3W	200lm	230V	⊕	115x70mm	2x68mm	55mm	12	AC LED
68076A/W/W	White	Warm white	3000K	4W	270lm	230V	⊕	160x70mm	3x68mm	55mm	12	AC LED
68076A/B/W	Black	Warm white	3000K	4W	270lm	230V	⊕	160x70mm	3x68mm	55mm	12	AC LED

Outdoor Dark Light Wall Recessed Aluminium




68062 | 3,6W | LED | Aluminium

Supplied with box for concrete installation.

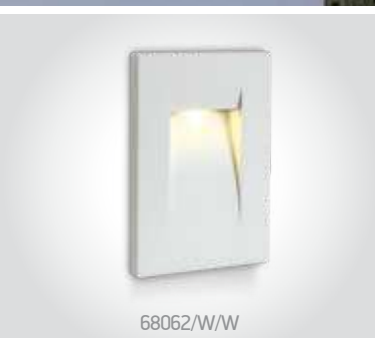


68064 | 3,6W | LED | Aluminium

Supplied with box for concrete installation.



68066 | 8,5W | SMD | Aluminium

Supplied with box for concrete installation.




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	Concrete installation	Gypsum installation	Height	Width	Notes
68062/W/W	White	Warm white	3000K	3,6W	100lm	53°	100-240V	⊕	62x97mm	60x95mm	65mm	24	Complete with 350mA driver
68062/AN/W	Anthracite	Warm white	3000K	3,6W	100lm	53°	100-240V	⊕	62x97mm	60x95mm	65mm	24	Complete with 350mA driver
68064/W/W	White	Warm white	3000K	3,6W	85lm	44°	100-240V	⊕	97x62mm	95x60mm	65mm	24	Complete with 350mA driver
68064/AN/W	Anthracite	Warm white	3000K	3,6W	85lm	44°	100-240V	⊕	97x62mm	95x60mm	65mm	24	Complete with 350mA driver
68064/G/W	Grey	Warm white	3000K	3,6W	85lm	44°	100-240V	⊕	97x62mm	95x60mm	65mm	24	Complete with 350mA driver
68066/W/W	White	Warm white	3000K	8,5W	160lm	44°	100-240V	⊕	238x74mm	238x74mm	80mm	12	Complete with 500mA driver
68066/AN/W	Anthracite	Warm white	3000K	8,5W	160lm	44°	100-240V	⊕	238x74mm	238x74mm	80mm	12	Complete with 500mA driver
68066/G/W	Grey	Warm white	3000K	8,5W	160lm	44°	100-240V	⊕	238x74mm	238x74mm	80mm	12	Complete with 500mA driver



The Inground Mini Series



Natural aluminium

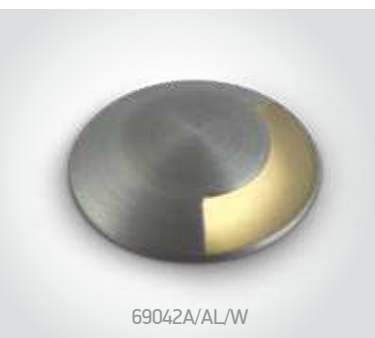

69042A/AL/W

69042A | 1W | SMD | Natural aluminium



Supplied with box for concrete installation.

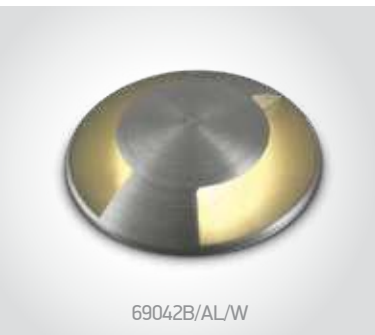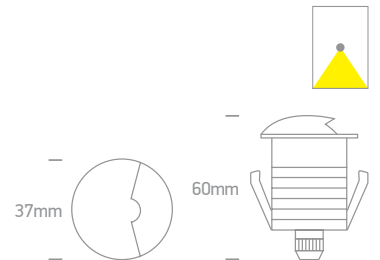

69042B/AL/W

69042B | 1W | SMD | Natural aluminium


Supplied with box for concrete installation.

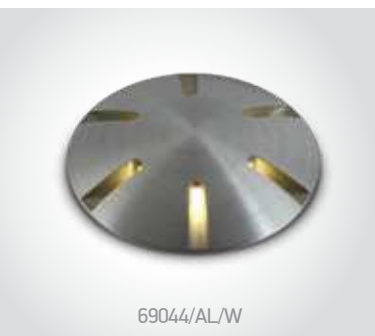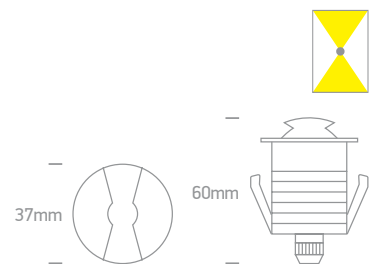

69044/AL/W

69044 | 1W | LED | Natural aluminium

Supplied with box for concrete installation.

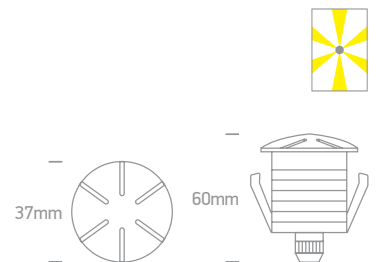

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class							Notes
69042A/AL/W	Aluminium	Warm white	3000K	1W	30lm	350mA		200cm	30mm	35mm	80mm	95+300mm drainage	50	Requires 350mA driver
69042B/AL/W	Aluminium	Warm white	3000K	1W	50lm	350mA		200cm	30mm	35mm	80mm	95+300mm drainage	50	Requires 350mA driver
69044/AL/W	Aluminium	Warm white	3000K	1W	30lm	350mA		200cm	30mm	35mm	80mm	95+300mm drainage	50	Requires 350mA driver



The Inground Midi Series

Natural aluminium





69015A | 3W | Aluminium

Supplied with box for concrete installation.



IP67

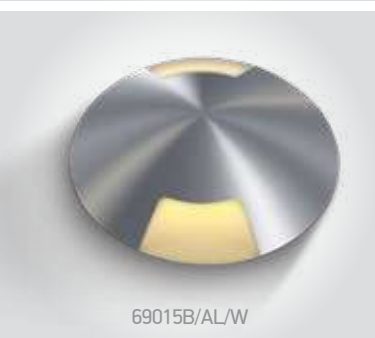


69015B | 3W | Aluminium

Supplied with box for concrete installation.



IP67

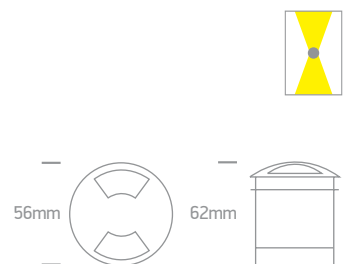


69015C | 3W | Aluminium

Supplied with box for concrete installation.




IP67

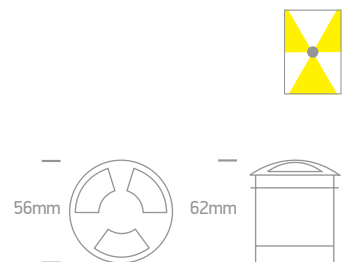


Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	⏏	⚡	⏏	📦	Notes
69015A/AL/W	Aluminium	Warm white	3000K	3W	30lm	24V DC	III	200cm	52mm	90+300mm drainage	32	Requires 24V DC driver
69015B/AL/W	Aluminium	Warm white	3000K	3W	60lm	24V DC	III	200cm	52mm	90+300mm drainage	32	Requires 24V DC driver
69015C/AL/W	Aluminium	Warm white	3000K	3W	80lm	24V DC	III	200cm	52mm	90+300mm drainage	32	Requires 24V DC driver

The Inground Maxi Series LED Aluminium


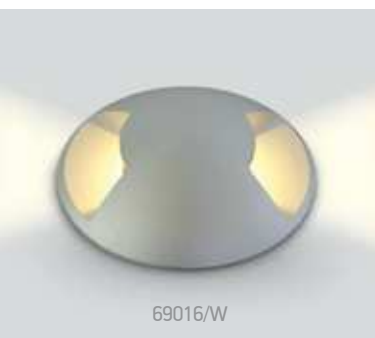


69016 | 3W | LED | Aluminium

Supplied with box for concrete installation.



IP67

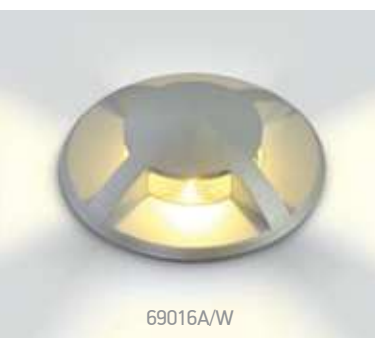



69016A | 3W | LED | Aluminium

Supplied with box for concrete installation.




IP67

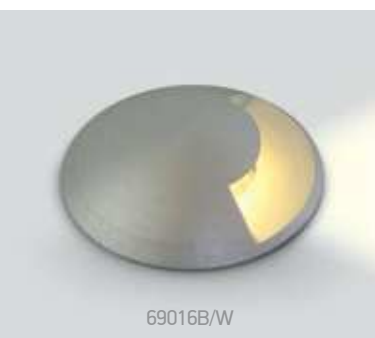


69016B | 3W | LED | Aluminium

Supplied with box for concrete installation.




IP67



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	⚡	🔧	📏	📦	Notes
69016/W	Aluminium	Warm white	3000K	3W	120lm	100-240V	⚡	200cm	77mm	130+300mm drainage	18	Complete with 350mA driver
69016A/W	Aluminium	Warm white	3000K	3W	150lm	100-240V	⚡	200cm	77mm	130+300mm drainage	18	Complete with 350mA driver
69016B/W	Aluminium	Warm white	3000K	3W	100lm	100-240V	⚡	200cm	77mm	130+300mm drainage	18	Complete with 350mA driver



The Inground Maxi Series GU10 Aluminium


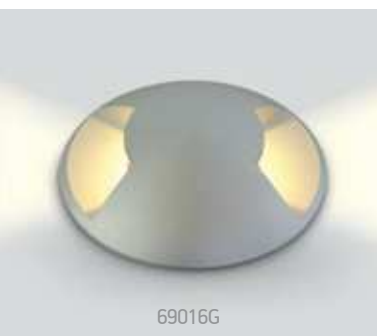


69016G | 10W | MR16 | GU10 | Aluminium

Supplied with box for concrete installation.



IP67

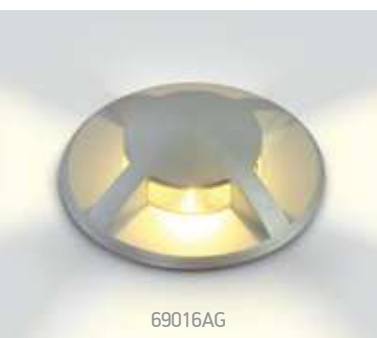



69016AG | 10W | MR16 | GU10 | Aluminium

Supplied with box for concrete installation.



IP67

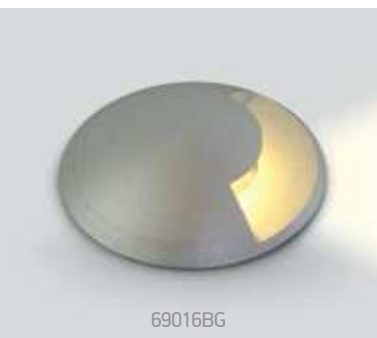


69016BG | 10W | MR16 | GU10 | Aluminium

Supplied with box for concrete installation.



IP67



Order Code	Colour	Watts	Input	Class					Notes
69016G	Aluminium	10W	100-240V		200cm	80mm	130+300mm drainage	18	1 gland
69016AG	Aluminium	10W	100-240V		200cm	80mm	130+300mm drainage	18	1 gland
69016BG	Aluminium	10W	100-240V		200cm	80mm	130+300mm drainage	18	1 gland

The Inground Mini Series




69042M/AL/W

69042M | 2W | LED | Aluminium

Supplied with box for concrete installation.



IP67





69042/AL/W

69042 | 2W | SMD | Natural Aluminium

Supplied with box for concrete installation.



IP67

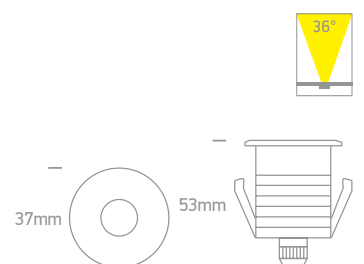


69028A/W

69028A | 2W | LED | Stainless Steel 316



IP67



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	Ⓢ	Gypsum/Decking	Concrete	Decking	Concrete	Notes
69042M/AL/W	Aluminium	Warm white	3000K	2W	150lm	24°	700mA	Ⓢ	200cm	22mm	26mm	60mm	95+300mm drainage	50 Requires 700mA driver
69042/AL/W	Aluminium	Warm white	3000K	2W	150lm	36°	700mA	Ⓢ	200cm	30mm	35mm	80mm	95+300mm drainage	50 Requires 700mA driver
69028A/W	Stainless steel	Warm white	3000K	2W	90lm	30°	230V	Ⓢ	200cm	-	100mm	-	130+300mm drainage	12 AC LED



69052/W

69052A/W

The COB Honeycomb Range



69052/W

69052 | 3W | COB | Stainless steel 316 + tempered glass


Supplied with box for concrete installation.



IP67



1 gland + Removable honeycomb.



69052A/W

69052A | 13W | COB | Aluminium


Supplied with box for concrete installation.



IP67



1 gland + Removable honeycomb.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	IP	Mounting	Drainage	Box	Notes
69052/W	Stainless steel	Warm white	3000K	3W	240lm	36°	24V DC	III	200cm	52mm	100+300mm drainage	50	Requires 24V DC driver
69052A/W	Aluminium	Warm white	3000K	13W	1000lm	36°	350mA	III	200cm	75mm	140+300mm drainage	24	Requires 350mA driver

The Dark Light Inground Range


24V DC



69056A/W

69056A | 3W | COB | Aluminium


Supplied with box for concrete installation.



69056B/W

69056B | 7W | COB | Aluminium


Supplied with box for concrete installation.



69056C/W

69056C | 9W | COB | Aluminium

Supplied with box for concrete installation.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	IP	Size	Depth	Drainage	Box	Notes
69056A/W	Aluminium	Warm white	3000K	3W	240lm	38°	24V DC	III	200cm	50mm	100+300mm	drainage	50	Requires 24V DC driver
69056B/W	Aluminium	Warm white	3000K	7W	560lm	38°	24V DC	III	200cm	60mm	100+300mm	drainage	36	Requires 24V DC driver
69056C/W	Aluminium	Warm white	3000K	9W	720lm	38°	24V DC	III	200cm	70mm	135+300mm	drainage	24	Requires 24V DC driver

one



69070C/W

69070A/W

The Dark Light Inground Range


230V



69070A/W

69070A | 3,5W | COB | Stainless steel 316L + Aluminium body


Supplied with box for concrete installation.



69070B/W

69070B | 10W | COB | Stainless steel 316L + Aluminium body


Supplied with box for concrete installation.



69070C/W

69070C | 15W | COB | Stainless steel 316L + Aluminium body

Supplied with box for concrete installation.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⚡	🔧	📏	📦	Notes
69070A/W	Stainless steel	Warm white	3000K	3,5W	300lm	20°	230V	⚡	200cm	100mm	120+300mm drainage	18	Complete with driver
69070B/W	Stainless steel	Warm white	3000K	10W	800lm	20°	230V	⚡	200cm	137mm	140+300mm drainage	8	Complete with driver
69070C/W	Stainless steel	Warm white	3000K	15W	1200lm	20°	230V	⚡	200cm	165mm	155+300mm drainage	6	Complete with driver



69068A/W

69068B/W

The Dark Light Inground

Constant current


69068A | 2W | SMD | Stainless steel 316 + Aluminium body



69068A/W



Supplied with box for concrete installation.

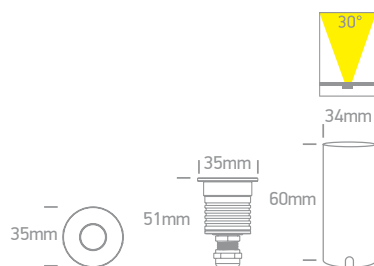


69068B | 4,5W | COB | Stainless steel 316 + Aluminium body



69068B/W



Supplied with box for concrete installation.

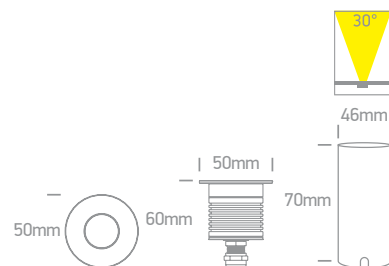


69068C | 6,5W | COB | Stainless steel 316 + Aluminium body



69068C/W



Supplied with box for concrete installation.

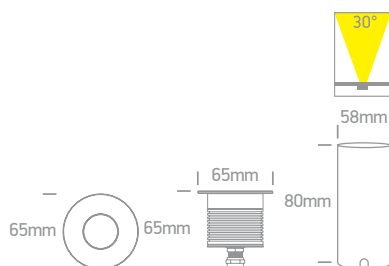

69068CH | 6,5W | COB | Stainless steel 316 + Aluminium body


Complete with honeycomb.



69068CH/W



Supplied with box for concrete installation.

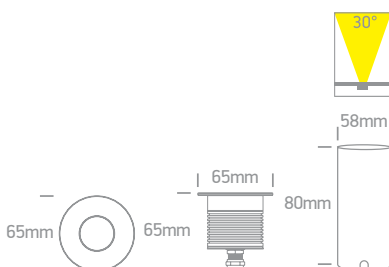

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⚡	🔧	⬆️	📦	Notes
69068A/W	Stainless steel	Warm white	3000K	2W	160lm	30°	700mA	III	200cm	35mm	80+300mm drainage	50	Requires 700mA driver
69068B/W	Stainless steel	Warm white	3000K	4,5W	360lm	30°	500mA	III	200cm	47mm	90+300mm drainage	36	Requires 500mA driver
69068C/W	Stainless steel	Warm white	3000K	6,5W	520lm	30°	700mA	III	200cm	59mm	100+300mm drainage	24	Requires 700mA driver
69068CH/W	Stainless steel	Warm white	3000K	6,5W	400lm	30°	700mA	III	200cm	59mm	100+300mm drainage	24	Requires 700mA driver


The Low Depth Inground 24V DC



69076A/W

69076A | 3x1W | Stainless steel 316L + Aluminium body


Low depth application.

new
IP67Supplied with box
for concrete installation.

69076B/W

69076B | 6x1W | Stainless steel 316L + Aluminium body


Low depth application.

new
IP67Supplied with box
for concrete installation.

69076C/W

69076C | 9x1W | Stainless steel 316L + Aluminium body


Low depth application.

new
IP67Supplied with box
for concrete installation.

69076DW

69076D | 18x1W | Stainless steel 316L + Aluminium body

Low depth application.

new
IP67Supplied with box
for concrete installation.

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⚡	🔧	📏	📦	Notes
69076A/W	Stainless steel	Warm white	3000K	3x1W	300lm	45°	24V DC	II	200cm	90mm	50+300mm drainage	24	Requires 24V DC driver
69076B/W	Stainless steel	Warm white	3000K	6x1W	600lm	45°	24V DC	II	200cm	122mm	50+300mm drainage	18	Requires 24V DC driver
69076C/W	Stainless steel	Warm white	3000K	9x1W	900lm	45°	24V DC	II	200cm	150mm	50+300mm drainage	12	Requires 24V DC driver
69076D/W	Stainless steel	Warm white	3000K	18x1W	1800lm	45°	24V DC	II	200cm	196mm	50+300mm drainage	6	Requires 24V DC driver

The COB Inground Range Stainless steel



69040/W

69040 | 10W | COB | Stainless steel 316



IP67



69050/C


69050 | 20W | COB | Dimmable | Stainless steel 316 + tempered glass



IP67



1 gland + Removable honeycomb.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
69040/W	Stainless steel	Warm white	3000K	10W	700lm	40°	230V		200cm	106mm	185+300mm drainage	6	Complete with 500mA driver
69050/C	Stainless steel	Cool white	4000K	20W	1800lm	25°	230V		200cm	132mm	200+300mm drainage	6	AC LED
69050/W	Stainless steel	Warm white	3000K	20W	1800lm	25°	230V		200cm	132mm	200+300mm drainage	6	AC LED

The Trimless Inground Range



69060/B/W

69060 | 6W | LED | Trimless | Aluminium + Glass

Supplied with box for concrete installation.



LED
BUILT IN

80
CRI

IK08

**WALK
OVER**


CE

2
YEAR

IP67



Complete with honeycomb.

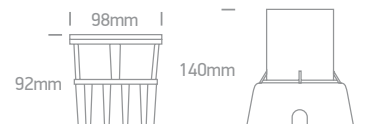

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⚡	💡	⬆️⬆️	📦	Notes
69060/B/W	Black	Warm white	3000K	6W	460lm	25°	100-240V	🌐	200cm	136mm	150+300mm drainage	6	Complete with 500mA driver

The COB Inground Adjustable Range

Stainless steel



69054/W

69054 | 15W | COB | Dimmable | Stainless steel 316 + tempered glass


Supplied with box for concrete installation.



IP67



1 gland + connection box.



69054A | 30W | COB | Dimmable | Stainless steel 316 + tempered glass


Supplied with box for concrete installation.



IP67



1 gland + connection box.

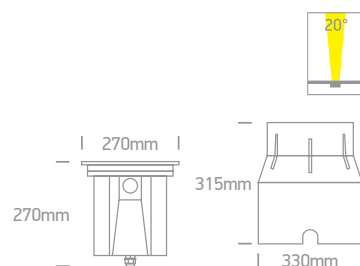


Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⚡	🔧	📏	📦	Notes
69054/W	Stainless steel	Warm white	3000K	15W	840lm	20°	230V	⚡	200cm	230mm	270+300mm drainage	2	AC LED
69054A/W	Stainless steel	Warm white	3000K	30W	2000lm	20°	230V	⚡	200cm	330mm	330+300mm drainage	1	AC LED



The Inground Tiltable Range

69072 | 3W | COB | Stainless steel 316L + Aluminium body | Tiltable beam




IP67




Supplied with box for concrete installation.

Tiltable beam $\pm 20^\circ$



69072/W

69074A | 3x1,5W | COB | Stainless steel 316L + Aluminium body | Tiltable beam




DARK LIGHT
IP67




Supplied with box for concrete installation.

Tiltable beam $\pm 20^\circ$



69074A/W

69074B | 9x1,5W | COB | Stainless steel 316L + Aluminium body | Tiltable beam




DARK LIGHT
IP67




Supplied with box for concrete installation.

Tiltable beam $\pm 20^\circ$



69074B/W

69074C | 12x1,5W | COB | Stainless steel 316L + Aluminium body | Tiltable beam




DARK LIGHT
IP67



Supplied with box for concrete installation.

Tiltable beam $\pm 20^\circ$



69074C/W

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏻	⚡	⬆️⬆️	📦	Notes
69072/W	Stainless steel	Warm white	3000K	3W	210lm	5°	230V	⚡	200cm	90mm	135+300mm drainage	18	Complete with driver
69074A/W	Stainless steel	Warm white	3000K	3x1,5W	320lm	36°	230V	⚡	200cm	140mm	185+300mm drainage	8	Complete with driver
69074B/W	Stainless steel	Warm white	3000K	9x1,5W	1000lm	36°	230V	⚡	200cm	170mm	210+300mm drainage	4	Complete with driver
69074C/W	Stainless steel	Warm white	3000K	12x1,5W	1250lm	36°	230V	⚡	200cm	200mm	270+300mm drainage	2	Complete with driver

The Asymmetric Inground Stainless steel



69062 | 8W | SMD | Asymmetrical | Stainless steel 316 + Aluminium



LED
BUILT IN

80
CRI


IK08

WALK
OVER

CE

2
YEAR

IP67

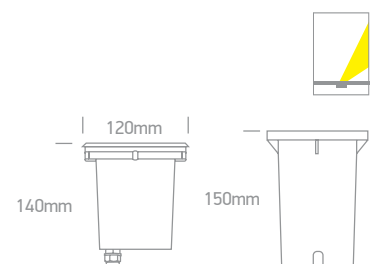

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class					Notes
69062/W	Stainless steel	Warm white	3000K	8W	680lm	230V		200cm	115mm	170+300mm drainage	12	Complete with 350mA driver

69058A/G/W

69058B/G/W

Ground Surface Mounted Range

Aluminium


69058A | 6W | COB | Aluminium

Surface mounted - No hole required.




69058A/G/W

IP67




69058B | 2x6W | COB | Aluminium

Surface mounted - No hole required.




69058B/G/W

IP67




69058C | 4x3W | COB | Aluminium

Surface mounted - No hole required.



69058C/G/W

IP67



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
69058A/G/W	Grey	Warm white	3000K	6W	300lm	230V	⌚	12	Complete with 500mA driver
69058B/G/W	Grey	Warm white	3000K	2x6W	600lm	230V	⌚	12	Complete with 500mA driver
69058C/G/W	Grey	Warm white	3000K	4x3W	600lm	230V	⌚	12	Complete with 300mA driver


The GU10 Inground Range

Stainless steel 316




69006G | 10W | MR16 | GU10 | Stainless steel 316

Supplied with box for concrete installation.

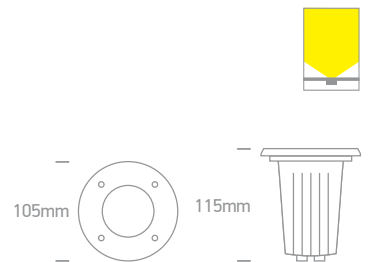

69046G | 10W | MR16 | GU10 | Stainless steel 316

Supplied with box for concrete installation.

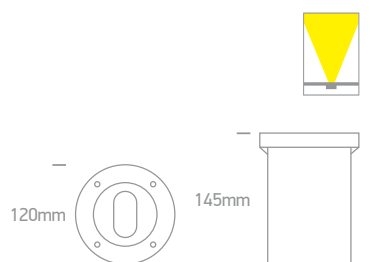

Order Code	Colour	Watts	Input	Class					Notes
69006G	Stainless steel	10W	100-240V		-	101mm	160+300mm drainage	20	2 glands
69046G	Stainless steel	10W	100-240V		200cm	115mm	160+300mm drainage	12	2 glands



The GX53 Inground Range Stainless steel



69006

69006 | 9W | GX53 | Stainless steel


Supplied with box for concrete installation.



IP67



Suitable for GX53 LED lamp.



Order Code	Colour	Watts	Input	Class				Notes
69006	Stainless steel	9W	100-240V		110mm	90+300mm drainage	20	-