



Industrial & Floodlights

Pages 647-674

20




The IP65 For T8 LED Tubes Single



38120P | T8 LED 60cm | PC + PC




new
IP65

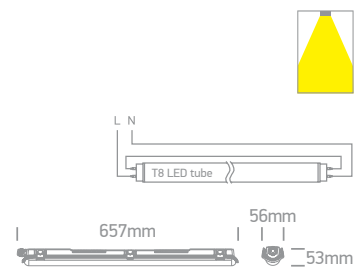

38140P | T8 LED 120cm | PC + PC




new
IP65

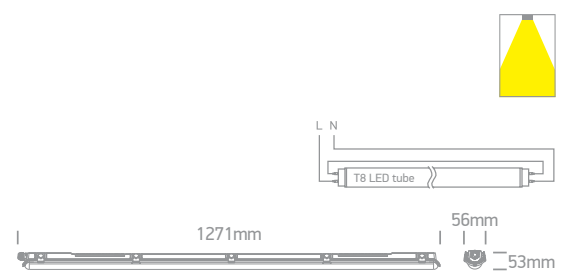

38150P | T8 LED 150cm | PC + PC



new
IP65

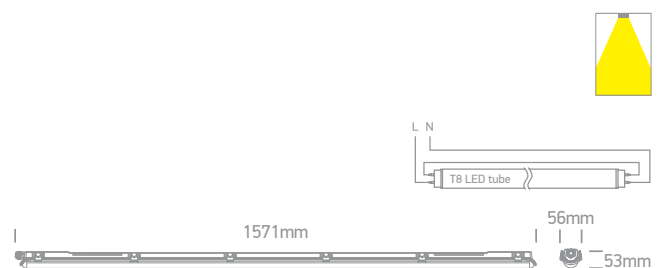

Order Code	Colour	Input	Class		Notes
38120P	Grey	100-240V		9	Only suitable for T8 LED tubes
38140P	Grey	100-240V		9	Only suitable for T8 LED tubes
38150P	Grey	100-240V		9	Only suitable for T8 LED tubes

The IP65 For T8 LED Tubes

Double



38220P


38220P | 2xT8 LED 60cm | PC + PC



CE 3 YEAR

new

IP65

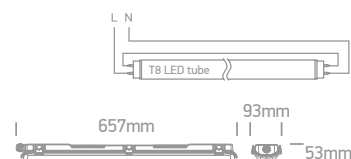

38240P


38240P | 2xT8 LED 120cm | PC + PC



CE 3 YEAR

new

IP65

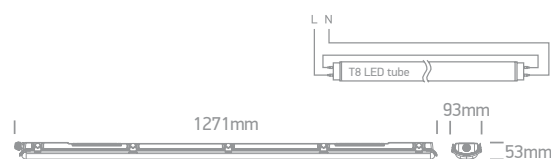

38250P


38250P | 2xT8 LED 150cm | PC + PC



CE 3 YEAR

new

IP65

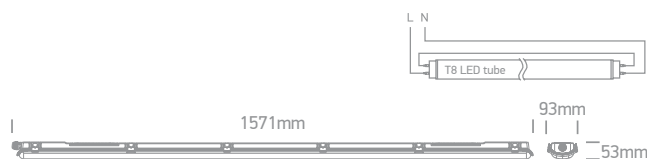

Order Code	Colour	Input	Class		Notes
38220P	Grey	100-240V		6	Only suitable for T8 LED tubes
38240P	Grey	100-240V		6	Only suitable for T8 LED tubes
38250P	Grey	100-240V		6	Only suitable for T8 LED tubes

The IP65 For T8 LED Tubes Single




38118E

38118E | T8 LED 60cm | PC + PC



CE 5 YEAR

IP65

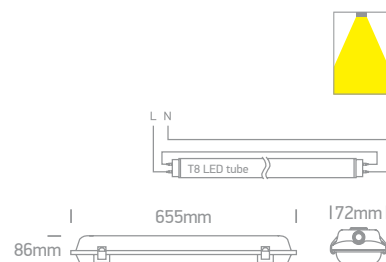


38136E

38136E | T8 LED 120cm | PC + PC



CE 5 YEAR

IP65

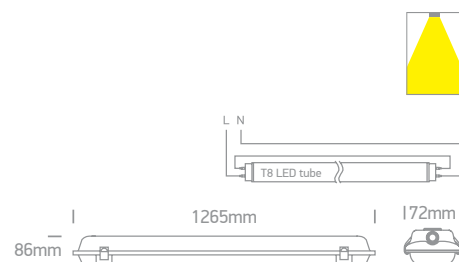


38158E

38158E | T8 LED 150cm | PC + PC



CE 5 YEAR

IP65

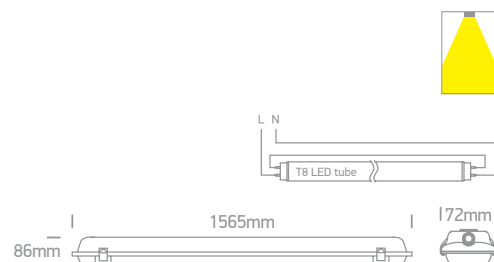

Order Code	Colour	Input	Class		Notes
38118E	Grey	100-240V	⌚	15	Only suitable for T8 LED tubes
38136E	Grey	100-240V	⌚	9	Only suitable for T8 LED tubes
38158E	Grey	100-240V	⌚	9	Only suitable for T8 LED tubes

The IP65 For T8 LED Tubes Double




38218E | 2xT8 LED 60cm | PC + PC



CE 5
YEAR

IP65

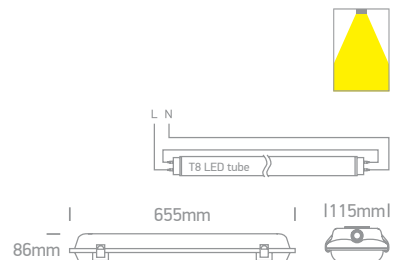


38236E | 2xT8 LED 120cm | PC + PC



CE 5
YEAR

IP65

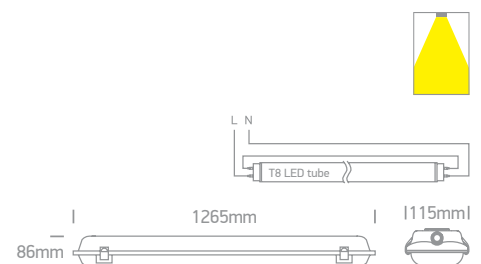


38258E | 2xT8 LED 150cm | PC + PC



CE 5
YEAR

IP65

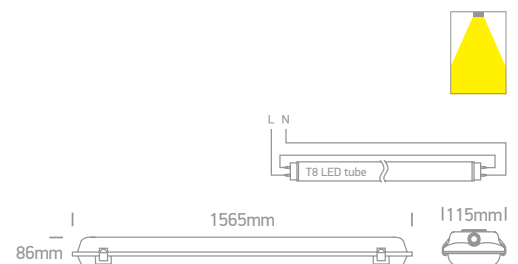

Order Code	Colour	Input	Class		Notes
38218E	Grey	100-240V	⊕	9	Only suitable for T8 LED tubes
38236E	Grey	100-240V	⊕	6	Only suitable for T8 LED tubes
38258E	Grey	100-240V	⊕	6	Only suitable for T8 LED tubes

The High Power IP65 LED Range



38118M/C


38118M | 15W | SMD | PC + opal PC diffuser



IP65



Stainless steel clips.



38158M/C


38158M | 40W | SMD | PC + opal PC diffuser



IP65



Stainless steel clips.

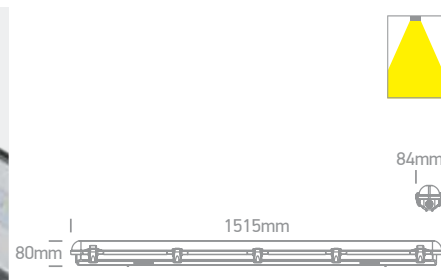

38236M/C


38236M | 60W | SMD | PC + opal PC diffuser



IP65



Stainless steel clips.

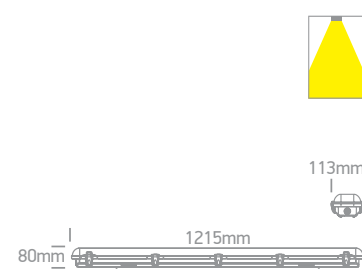

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38118M/C	Grey	Cool white	4000K	15W	1500lm	230V	⊕	12	Complete with 350mA driver
38158M/C	Grey	Cool white	4000K	40W	4000lm	230V	⊕	9	Complete with 700mA driver
38236M/C	Grey	Cool white	4000K	60W	6000lm	230V	⊕	6	Complete with 1050mA driver

38150M/V


38120M/V

The IP65 CCT V & PV Range



38120M/V

38120M | 25W PV | SMD | PC + PC

new
IP65


Stainless steel clips.


 77mm
66mm


38140M/V

38140M | 50W PV | SMD | PC + PC


new
IP65


Stainless steel clips.


 77mm
66mm


38140ME/V

38140ME | 50W PV | SMD | Emergency 3Hrs Maintained | PC + PC


new
IP65


Stainless steel clips.


 77mm
66mm


38150M/V

38150M | 70W PV | SMD | PC + PC

new
IP65


Stainless steel clips.



 77mm
66mm


Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Battery Duration		Notes
38120M/V	Grey	CCT V	3000K-4000K-6500K	14W-18W-22W-25W	2500lm@25W	230V	⊕	-	15	Complete with PV driver
38140M/V	Grey	CCT V	3000K-4000K-6500K	28W-36W-42W-50W	5000lm@50W	230V	⊕	-	12	Complete with PV driver
38140ME/V	Grey	CCT V	3000K-4000K-6500K	28W-36W-42W-50W	5000lm@50W	230V	⊕	3Hrs	12	Supplied with battery
38150M/V	Grey	CCT V	3000K-4000K-6500K	48W-55W-62W-70W	7000lm@70W	230V	⊕	-	9	Complete with PV driver


The IP65 CCT V & PV Range Enclosed




38120N | 18W PV | SMD | PC + PC



38140N | 36W PV | SMD | PC + PC

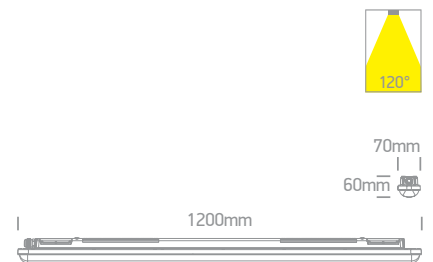

38150N | 48W PV | SMD | PC + PC

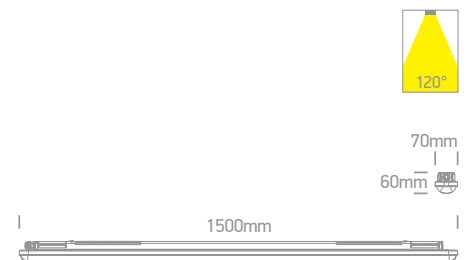

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	Box	Notes
38120N/V	Grey	CCT V	3000K-4000K-6500K	10W-13W-15W-18W	2160lm@18W	120°	230V		16	Complete with PV driver
38140N/V	Grey	CCT V	3000K-4000K-6500K	20W-25W-30W-36W	4320lm@36W	120°	230V		16	Complete with PV driver
38150N/V	Grey	CCT V	3000K-4000K-6500K	27W-35W-40W-48W	5760lm@48W	120°	230V		12	Complete with PV driver

The IP65 LED Slim Range

PC



38118LA | 18W | SMD | PC



IP65

2 YEAR



38136LA | 36W | SMD | PC



IP65

2 YEAR




38145LA | 45W | SMD | PC



IP65

2 YEAR

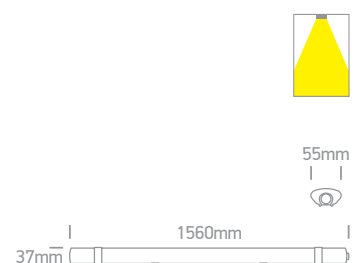

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
38118LA/D	White	Daylight	6000K	18W	1600lm	100-240V		50cm	20	Complete with driver
38118LA/C	White	Cool white	4000K	18W	1600lm	100-240V		50cm	20	Complete with driver
38136LA/D	White	Daylight	6000K	36W	3200lm	100-240V		50cm	20	Complete with driver
38136LA/C	White	Cool white	4000K	36W	3200lm	100-240V		50cm	20	Complete with driver
38145LA/D	White	Daylight	6000K	45W	4100lm	100-240V		50cm	20	Complete with driver
38145LA/C	White	Cool white	4000K	45W	4100lm	100-240V		50cm	20	Complete with driver



The IP65 LED Connectable Range

Single



38118LC/C

38118LC | 18W | SMD | Connectable | PC

Supermarket linear range.



IP65



Optional suspension kit.
Order code 050084.



Connect 20 fittings
maximum.



38136LC/C

38136LC | 36W | SMD | Connectable | PC

Supermarket linear range.



IP65



Optional suspension kit.
Order code 050084.



Connect 10 fittings
maximum.



38145LC/C

38145LC | 45W | SMD | Connectable | PC

Supermarket linear range.




IP65



Optional suspension kit.
Order code 050084.



Connect 10 fittings
maximum.

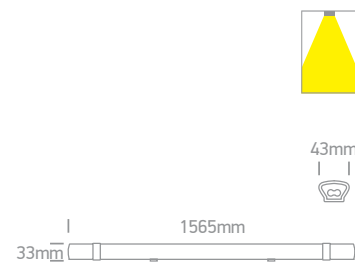

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	S	Box	Notes
38118LC/C	White	Cool white	4000K	18W	1550lm	100-240V	□	50cm	20	Complete with driver
38118LC/W	White	Warm white	3000K	18W	1500lm	100-240V	□	50cm	20	Complete with driver
38136LC/C	White	Cool white	4000K	36W	3100lm	100-240V	□	50cm	20	Complete with driver
38136LC/W	White	Warm white	3000K	36W	3000lm	100-240V	□	50cm	20	Complete with driver
38145LC/C	White	Cool white	4000K	45W	4000lm	100-240V	□	50cm	20	Complete with driver

The IP65 LED Connectable Range


Double



38236LC/C

38236LC | 36W | SMD | Connectable | PC

Supermarket linear range.



IP65

2
YEAR



Optional suspension kit.
Order code 050084.



Connect 10 fittings
maximum.



79mm



38245LC/C

38245LC | 45W | SMD | Connectable | PC

Supermarket linear range.



IP65

2
YEAR



Optional suspension kit.
Order code 050084.



Connect 10 fittings
maximum.



79mm



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	5	Box	Notes
38236LC/D	White	Daylight	6000K	36W	3100lm	100-240V		50cm	10	Complete with driver
38236LC/C	White	Cool white	4000K	36W	3100lm	100-240V		50cm	10	Complete with driver
38245LC/D	White	Daylight	6000K	45W	4000lm	100-240V		50cm	10	Complete with driver
38245LC/C	White	Cool white	4000K	45W	4000lm	100-240V		50cm	10	Complete with driver

38100A/W/V

38100C/B/V

The Supermarket Linear System

CCT V & PV

38100A | 20W PV | SMD | Linear system | Aluminium


Maximum 600W can be connected together.



Complete with
2 pcs fixing clips &
plastic connector.




Optional
2m suspension kit.
Order code 050012.



38100A/W/V

38100B | 40W PV | SMD | Linear system | Aluminium


Maximum 600W can be connected together.



Complete with
2 pcs fixing clips &
plastic connector.



Optional
2m suspension kit.
Order code 050012.



38100B/W/V

38100C | 60W PV | SMD | Linear system | Aluminium


Maximum 600W can be connected together.



Complete with
2 pcs fixing clips &
plastic connector.



Optional
2m suspension kit.
Order code 050012.

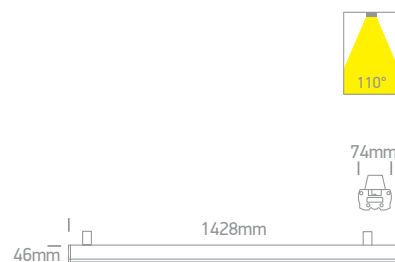

38100C/W/V

050012A | Connector for 38100A, 38100B, 38100C**050012** | Suspension 2m for 38100A, 38100B, 38100C

050012



050012A

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏏	📦	Notes
38100A/W/V	White	CCT V	3000K-4000K-5000K	12W-14W-17W-20W	2600lm@20W	110°	230V	⏏	80cm	10	Complete with PV driver
38100B/W/V	White	CCT V	3000K-4000K-5000K	23W-28W-34W-40W	5200lm@40W	110°	230V	⏏	140cm	10	Complete with PV driver
38100C/W/V	White	CCT V	3000K-4000K-5000K	34W-40W-50W-60W	7800lm@60W	110°	230V	⏏	170cm	10	Complete with PV driver

The Supermarket Linear System


CCT V & PV



38100A/B/V

38100A | 20W PV | SMD | Linear system | Aluminium

Maximum 600W can be connected together.



new


IP20



Complete with
2 pcs fixing clips &
plastic connector.



Optional
2m suspension kit.
Order code 050012.



38100B/B/V

38100B | 40W PV | SMD | Linear system | Aluminium

Maximum 600W can be connected together.



new


IP20



Complete with
2 pcs fixing clips &
plastic connector.



Optional
2m suspension kit.
Order code 050012.

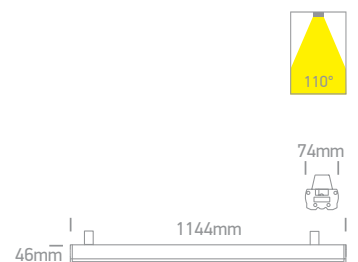

38100C/B/V

38100C | 60W PV | SMD | Linear system | Aluminium

Maximum 600W can be connected together.



new


IP20



Complete with
2 pcs fixing clips &
plastic connector.



Optional
2m suspension kit.
Order code 050012.

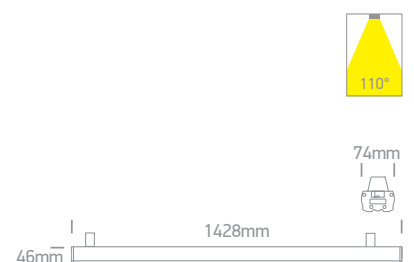

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏏	📦	Notes
38100A/B/V	Black	CCT V	3000K-4000K-5000K	12W-14W-17W-20W	2600lm@20W	110°	230V	⏏	80cm	10	Complete with PV driver
38100B/B/V	Black	CCT V	3000K-4000K-5000K	23W-28W-34W-40W	5200lm@40W	110°	230V	⏏	140cm	10	Complete with PV driver
38100C/B/V	Black	CCT V	3000K-4000K-5000K	34W-40W-50W-60W	7800lm@60W	110°	230V	⏏	170cm	10	Complete with PV driver



The Supermarket LED Linear Range Aluminium



38280 | 80W | SMD | Aluminium

Can be connected in line.



IP20



Complete with
2 Fixing clips
& 2 connectors.



Complete with
3m suspension kit.



Adjustable sides



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Notes
38280/W/C	White	Cool white	4000K	80W	7400lm	230V	4	Complete with 600mA & 1500mA drivers

The IP66 Industrial LED Range




38115LB/C


38115LB | 15W | SMD | PC



IP66



Complete with 2pcs fixing clips.



38130LB/V


38130LB | 30W | SMD | PC



IP66



Complete with 3pcs fixing clips.



38150LB/V


38150LB | 50W | SMD | PC



IP66



Complete with 3pcs fixing clips.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38115LB/C	White	Cool white	4000K	15W	1725lm	230V	☐	15	Complete with 140mA driver
38130LB/V	White	CCT V	3000K-4000K-6000K	30W	3450lm	230V	☐	12	Complete with 230mA driver
38150LB/V	White	CCT V	3000K-4000K-6000K	50W	5750lm	230V	☐	9	Complete with 300mA driver

The Industrial IP65 AC LED UFO Aluminium




63100NA/C

63100NA | 100W | SMD | AC LED | Aluminium



IP65




63150NA/C

63150NA | 150W | SMD | AC LED | Aluminium



IP65




63200NA/C

63200NA | 200W | SMD | AC LED | Aluminium



IP65



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
63100NA/C	Black	Cool white	4000K	100W	10000lm	90°	230V		150cm	10	AC LED
63150NA/C	Black	Cool white	4000K	150W	15000lm	90°	230V		150cm	10	AC LED
63200NA/C	Black	Cool white	4000K	200W	20000lm	90°	230V		150cm	10	AC LED



The Industrial IP65 UFO Range

CCT V & PV & BV





63100NB/V

63100NB | 100W PV | SMD | Aluminium + PC





63150NB/V

63150NB | 150W PV | SMD | Aluminium + PC



63200NB/V

63200NB | 200W PV | SMD | Aluminium + PC



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⚡	📦	Notes
63100NB/V	Black	CCT V	3000K-4000K-5000K	60W-80W-100W	15000lm@100W	70°-90°-110°	230V	⚡	50cm	1	Complete with PV driver
63150NB/V	Black	CCT V	3000K-4000K-5000K	80W-120W-150W	22500lm@150W	70°-90°-110°	230V	⚡	50cm	1	Complete with PV driver
63200NB/V	Black	CCT V	3000K-4000K-5000K	100W-150W-200W	30000lm@200W	70°-90°-110°	230V	⚡	50cm	1	Complete with PV driver

The Industrial IP65 UFO Range

DALI




63150NL/C

63150NL | 150W | SMD | DALI | Aluminium + PC



IP65




63240NL/C

63240NL | 240W | SMD | DALI | Aluminium + PC



IP65



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
63150NL/C	Black	Cool white	4000K	150W	22500lm	90°	230V		150cm	1	Complete with DALI 2 driver
63240NL/C	Black	Cool white	4000K	240W	36000lm	90°	230V		150cm	1	Complete with DALI 2 driver



63200N/V



63100N/V

The Industrial IP65 UFO Range

CCT V & PV




63100N/V

63100N | 100W PV | SMD | Aluminium + PC



IP65




63150N/V

63150N | 150W PV | SMD | Aluminium + PC



IP65




63200N/V

63200N | 200W PV | SMD | Aluminium + PC



IP65



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⚡	📦	Notes
63100N/V	Black	CCT V	4000K-4700K-5700K	60W-80W-100W	15000lm@100W	90°	230V	⌚	150cm	1	Complete with PV driver
63150N/V	Black	CCT V	4000K-4700K-5700K	90W-120W-150W	22500lm@150W	90°	230V	⌚	150cm	1	Complete with PV driver
63200N/V	Black	CCT V	4000K-4700K-5700K	120W-160W-200W	30000lm@200W	90°	230V	⌚	150cm	1	Complete with PV driver



The Industrial IP65 Linear Range

Adjustable




63100L/C

63100L/C | SMD | 100W | Linear high bay | Aluminium

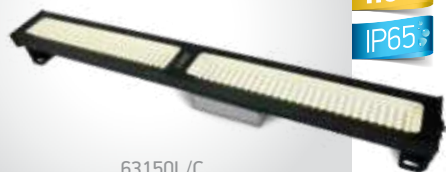


63150L/C

63150L/C | SMD | 150W | Linear high bay | Aluminium



63200L/C

63200L/C | SMD | 200W | Linear high bay | Aluminium

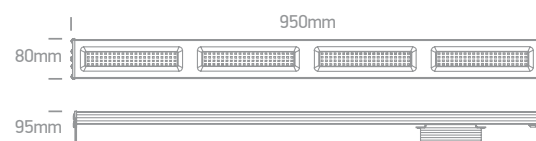

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏻	📦	Notes
63100L/C	Black	Cool white	4000K	100W	10000lm	120°	120-240V	⚡	100cm	6	Complete with driver
63150L/C	Black	Cool white	4000K	150W	15000lm	120°	120-240V	⚡	100cm	4	Complete with driver
63200L/C	Black	Cool white	4000K	200W	20000lm	120°	120-240V	⚡	100cm	4	Complete with driver


The AC Street Lights CCT V



70118A/AN/V

70118A | SMD | DOB | 50W | Aluminium + PC

Mounting bracket must be ordered separately.




new
IP65



Wall mounting bracket.
Order code 050400A/AN.



Pole mounting bracket.
Order code 050400B/AN.



70118B/AN/V

70118B | SMD | DOB | 100W | Aluminium + PC

Mounting bracket must be ordered separately.




new
IP65



Wall mounting bracket.
Order code 050400A/AN.



Pole mounting bracket.
Order code 050400B/AN.



70118C/AN/V

70118C | SMD | DOB | 150W | Aluminium + PC

Mounting bracket must be ordered separately.




new
IP65



Wall mounting bracket.
Order code 050400A/AN.



Pole mounting bracket.
Order code 050400B/AN.



70118D/AN/V

70118D | SMD | DOB | 200W | Aluminium + PC

Mounting bracket must be ordered separately.




new
IP65



Wall mounting bracket.
Order code 050400A/AN.



Pole mounting bracket.
Order code 050400B/AN.

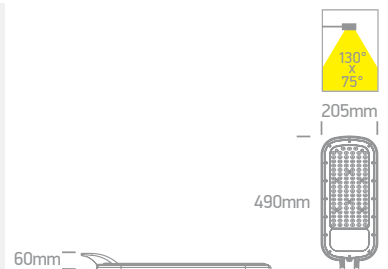

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⚡	📦	Notes
70118A/AN/V	Anthracite	CCT V	3000K-4000K-5000K	50W	5000lm	130°x75°	230V	Ⓛ	100cm	6	-
70118B/AN/V	Anthracite	CCT V	3000K-4000K-5000K	100W	10000lm	130°x75°	230V	Ⓛ	100cm	5	-
70118C/AN/V	Anthracite	CCT V	3000K-4000K-5000K	150W	15000lm	130°x75°	230V	Ⓛ	100cm	5	-
70118D/AN/V	Anthracite	CCT V	3000K-4000K-5000K	200W	20000lm	130°x75°	230V	Ⓛ	100cm	5	-




AC LED Floodlights

CCT V 30-150W


7028CD/B/V

7028CB/B/V

7028CB | 30W | SMD | Aluminium + tempered glass




CCT V button.




7028CB/B/V

7028CC | 50W | SMD | Aluminium + tempered glass




CCT V button.




7028CC/B/V

7028CD | 100W | SMD | Aluminium + tempered glass




CCT V button.




7028CD/B/V

7028CE | 150W | SMD | Aluminium + tempered glass



CCT V button.



7028CE/B/V

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏻	📦	Notes
7028CB/B/V	Black	CCT V	3000K-4000K-6500K	30W	3000lm	110°	230V	⏻	50cm	20	AC LED
7028CC/B/V	Black	CCT V	3000K-4000K-6500K	50W	5000lm	110°	230V	⏻	50cm	10	AC LED
7028CD/B/V	Black	CCT V	3000K-4000K-6500K	100W	10000lm	110°	230V	⏻	50cm	5	AC LED
7028CE/B/V	Black	CCT V	3000K-4000K-6500K	150W	15000lm	110°	230V	⏻	50cm	4	AC LED


AC LED Floodlights

CCT V 200-300W




7028CF/B/V

7028CF | 200W | SMD | Aluminium + tempered glass




CCT V button.




7028CH/B/V

7028CH | 300W | SMD | Aluminium + tempered glass





CCT V button.



7028CF/B/D

7028CF | 250W | SMD | Aluminium + tempered glass



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⚡	📦	Notes
7028CF/B/V	Black	CCT V	3000K-4000K-6500K	200W	20000lm	110°	230V	⚡	50cm	4	AC LED
7028CH/B/V	Black	CCT V	3000K-4000K-6500K	300W	30000lm	110°	230V	⚡	50cm	2	AC LED
7028CF/B/D	Black	Daylight	6000K	250W	22500lm	110°	230V	⚡	30cm	4	AC LED

The LED Wall Washers


RGB & RGBW




7055B/RGB

7055B/RGB | 24x1,5W | LED | RGB | Aluminium

Connect maximum 5pcs.




IP66

89100LP
DALI LED Controller 4 channel.

7055A/RGBW


7055A/RGBW | 12W | LED | RGB + W | Aluminium

Connect maximum 10pcs.



new


IP66



7055B/RGBW

7055B/RGBW | 24W | LED | RGB + W | Aluminium

Connect maximum 5pcs.




new

IP66



Order Code	Colour	Light Colour	CCT (K)	Watts	Beam Angle	Input	Class			Notes
7055B/RGB	Grey	RGB	-	24x1,5W	30°	24V DC		100cm	12	Requires 24V DC driver
7055A/RGBW	Grey	RGB + Warm white	RGB + 3000K	12W	60°x20°	24V DC		100cm	12	Requires 24V DC driver
7055B/RGBW	Grey	RGB + Warm white	RGB + 3000K	24W	60°x20°	24V DC		100cm	12	Requires 24V DC driver

The LED Wall Washers Single Colour

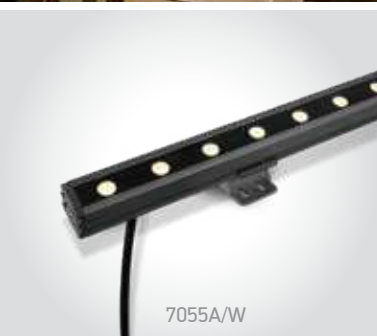

7055A/W

7055A | 12x1W | LED | Aluminium


Connect maximum 10pcs.



IP66



7055A/C



7055B/W

7055B | 24x1W | LED | Aluminium


Connect maximum 5pcs.



IP66



7055B/C





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⚡	📦	Notes
7055A/C	Grey	Cool white	4000K	12x1W	850lm	60°x20°	24V DC	III	100cm	12	Requires 24V DC driver
7055A/W	Grey	Warm white	3000K	12x1W	850lm	60°x20°	24V DC	III	100cm	12	Requires 24V DC driver
7055B/C	Grey	Cool white	4000K	24x1W	1700lm	60°x20°	24V DC	III	100cm	12	Requires 24V DC driver
7055B/W	Grey	Warm white	3000K	24x1W	1700lm	60°x20°	24V DC	III	100cm	12	Requires 24V DC driver




The LED High Power Box Aluminium



7058A | 120W PV | SMD | Surface mounted | Aluminium

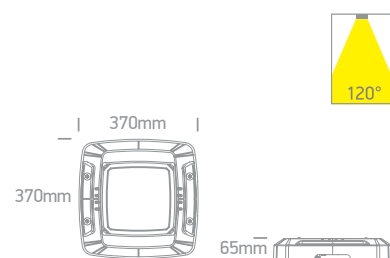

7058R | 120W | SMD | Recessed mounted | Aluminium

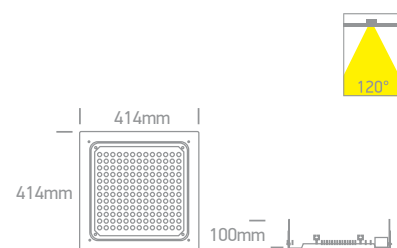

Ideal for petrol stations, showrooms & warehouses.

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
7058A/W/V	White	CCT V	3000K-4000K-5000K	36W-60W-90W-120W	18000lm@120W	120°	230V	⌚	-	-	1	Complete with PV driver
7058R/W/C	White	Cool white	4000K	120W	10200lm	120°	100-240V	⌚	380x380mm	130mm	1	Complete with driver

The Industrial LED Lights Aluminium




7056A/C

7056A | 50W | SMD | Aluminium



IP65




7056A/V

7056A | 50W | SMD | Aluminium



new
IP65




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7056A/C	Black	Cool white	4000K	50W	4250lm	230V	⌚	6	Complete with driver
7056A/V	Black	CCT V	3000K-4000K-5000K	50W	4250lm	230V	⌚	6	Complete with 1200mA driver



The LED Park Light CCT V



70112 | 75W PV | LED | Aluminium



IP66



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
70112/B/V	Black	CCT V	2700K-3300K-4000K	25W-40W-60W-75W	8250lm@75W	120-240V		150cm	1	Complete with PV driver


The LED Park Lantern Aluminium



70110 | 60W | LED | Aluminium




IP66



70105 | 50W | COB | Aluminium



IP65



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
70110/AN/C	Anthracite	Cool white	4000K	60W	4500lm	Assymetric	100-240V		100cm	1	Complete with driver
70105/AN/C	Anthracite	Cool white	4000K	50W	4000lm	60°	100-240V		500cm	1	Complete with driver